



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR	N0:S150203-14A/14B/14C	Yong	2015.08.14

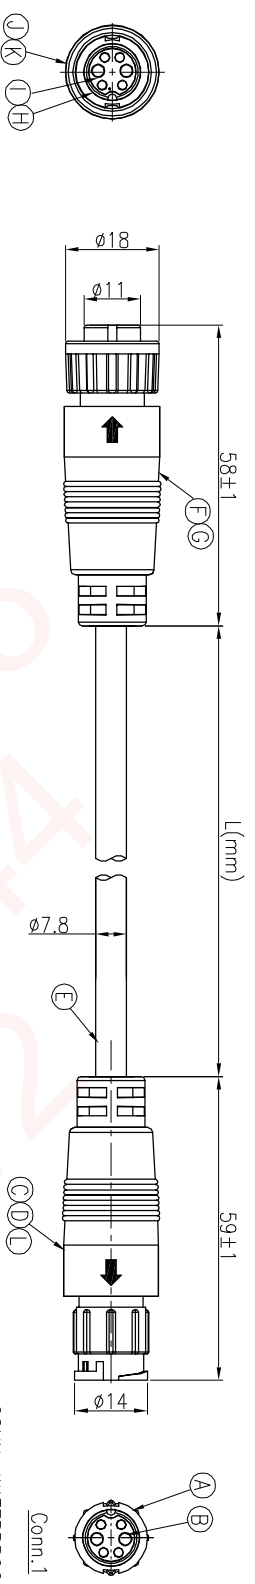

CONN. WATERPROOF RATE: IP67


CONN. WATERPROOF RATE: IP67

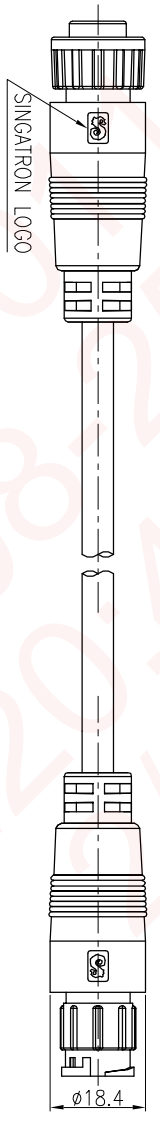

6	ORANGE/WHITE(26#)	6
5	RED(16#)	5
4	BROWN(26#)	4
3	BROWN/WHITE(26#)	3
2	BLACK(16#)+DRAIN	2
1	ORANGE(26#)	1
CONN.1 WIRE COLOR		CONN.2
PIN OUT		

P/N	CABLE L(mm)
2CT3016-W06832H	10000±500
2CT3016-W06833H	30000±500
2CT3016-W06834H	40000±500

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

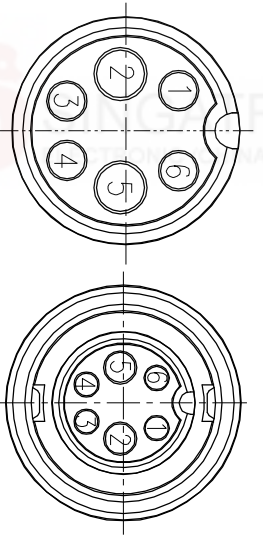

CONN.1 Pin Assignments
Front View

CONN.2 Pin Assignments
Front View

L	TUBE	12	125°C 300V	BLACK
K	O-RING	1	EPDM	BLACK
J	LOCK NUT	1	NYLON+GF	BLACK
I	MALE PIN	6	BRASS	GOLD PLATING OVER NICKEL PLATING
H	BODY	1	NYLON+GF	BLACK
G	INNER MOLD	1	TPU	BLACK
F	OVER MOLD	1	PVC	BLACK
E	CABLE	1	UL2464 26#*2P+ 16#*2C+FF+AL+D+B (UV RESISTANT)OD 7.8	BLACK (PVC JACKET)
D	INNER MOLD	1	TPU	BLACK
C	OVER MOLD	1	PVC	BLACK
B	FEMALE PIN	6	BRASS	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司

CIRCULAR STANDARD SIZE (IP67) LOCK TYPE
F CONN. M(2+4)+F(M)(10+5)A TO M CONN. F

TITLE	DECIMALS:	ANGLES:
DWN	X :±0.5	X :±2°
CHKD	X.X :±0.3	X.X :±1°
APVD	X.XX :±0.2	

CUSTOMER COPY