REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:T100519-8A	HARLEN	2010.05.19
B	ECN NO:S110707	HARLEN	2011.8.2
C	ECN NO.:S121109	YF	2014.03.28

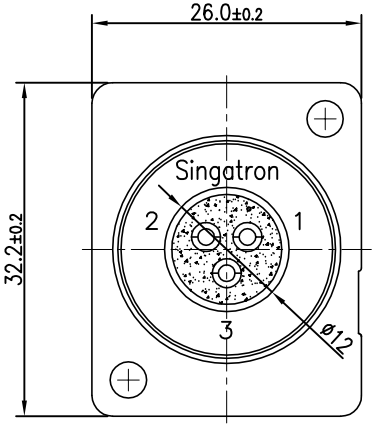



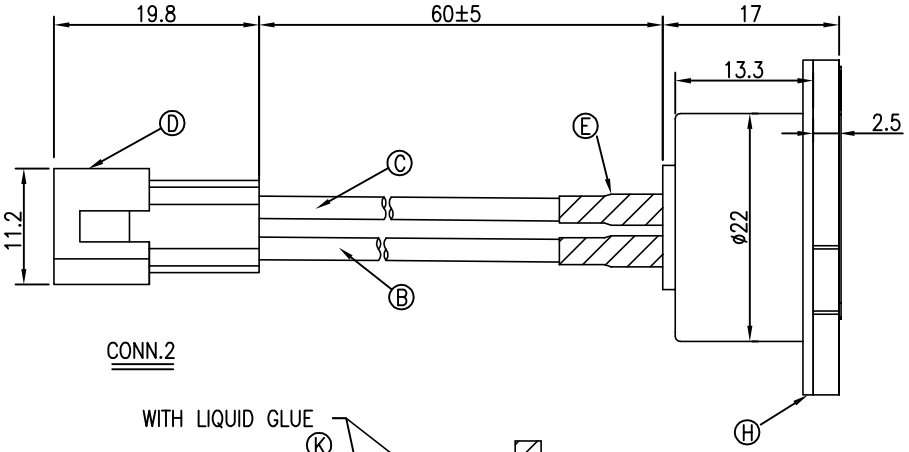

CONN.2

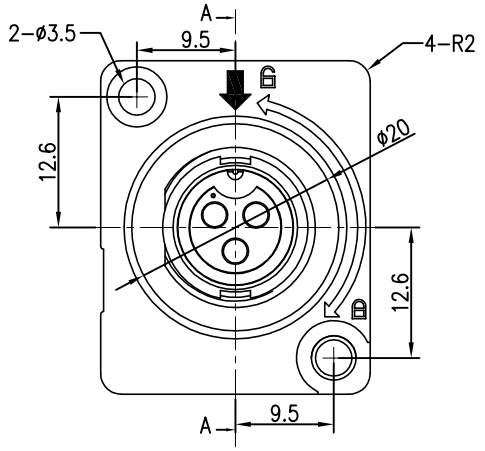

CONN.1

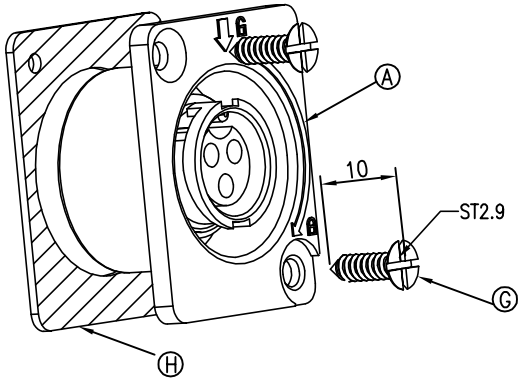

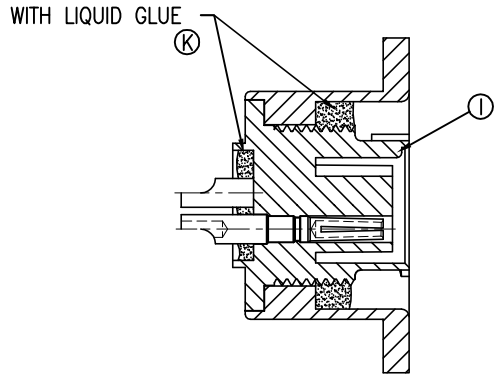

A-A SECTION

K	LIQUID GLUE	1	N/A	BLACK
J	FEMALE PIN	3	Phosphor Bronze	1u" GOLD PLATING OVER NICKEL PLATING
I	PANEL BODY	1	PA66+30%GF	BLACK
H	GASKET	1	EPDM ADHESIVE	BLACK
G	SCREW	2	STAINLESS STEEL	BLACK
E	SHRINK TUBE	2	ø3.0*15mm	BLACK
D	CONNECTOR	2	BRASS	TIN
		1	NYLON 66 94V-2	WHITE
C	WIRE	1	UL1015 18AWG	BLACK
B	WIRE	1	UL1015 18AWG	RED
A	HOUSING	1	PA66+30%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

NOTES:
1. WATERPROOF RATE: IP55
2. ELECTRICAL CHARACTERISTICS
   TEMPERATURE RANGE: -20°C TO +80°C
   CURRENT RATING: 10A
   DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR ONE MINUTE
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS
6. 螺絲以附件形式包裝出貨
7. THE TORQUE OF SCREWING 3.5KGF MAX



PIN ASSIGNMENTS
FRONT VIEW

N/A		3
2	BLACK	2
1	RED	1
CONN.2	COLOR	CONN.1
PIN OUT		

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	3PIN POWER SOCKET(10A)		
DWN	YF	PART NO.2CT3020-W034A5	
CHKD	Harlen	SCALE 2:1	UNIT: mm
APVD	Quan	SIZE: A3	SHEET:1 OF 1 REV:C

CUSTOMER COPY

文件編號 RD-06-043-A