REV.	ECN NO OR DESCRIPTION	REVISED	DATE
C	ECN NO:S110707	HARLEN	2011.8.10
D	ECN NO:S120528	HARLEN	2012.5.8
E	ECN NO:S140651	YF	2014.06.20

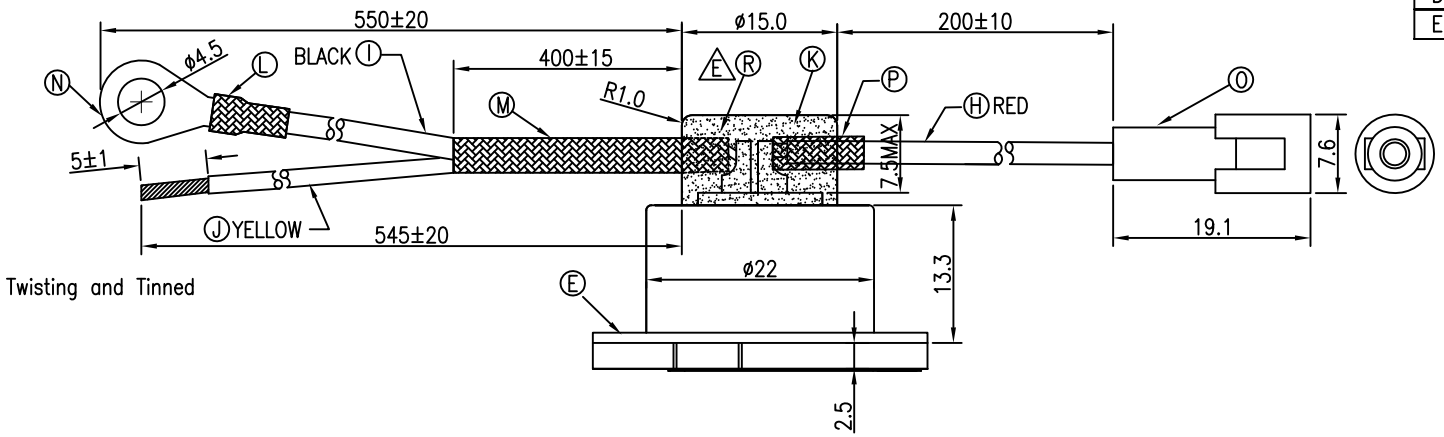

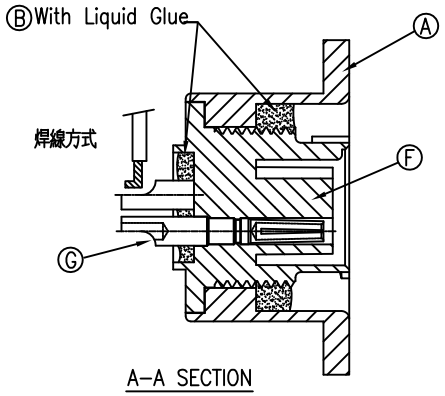

A–A SECTION

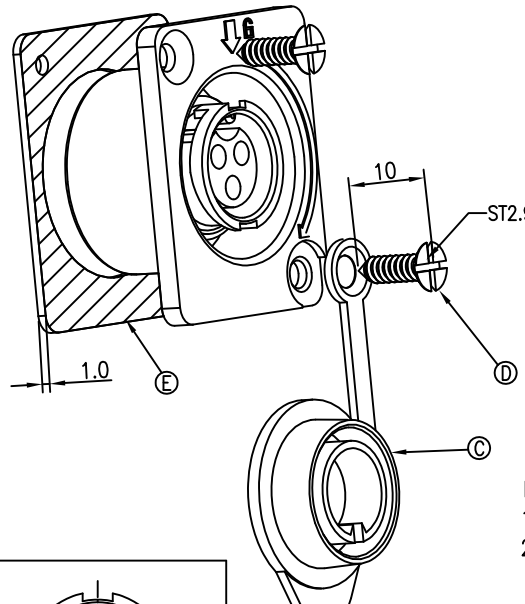

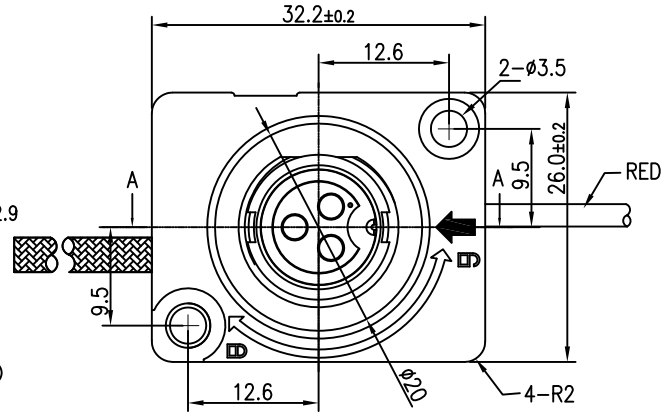

R	UV GLUE	1	N/A	N/A
P	SHRINK TUBE	1	ø3.0*10mm	BLACK
O	CONNACTOR	1	BRASS	TIN PLATING
		1	NYLON66 UL94V-2	WHITE
N	TERMINAL	1	ø4.5*ø8.0	TIN PLATING
M	SHRINK TUBE	1	ø6.0*415mm	BLACK
L	SHRINK TUBE	1	ø4.0*15mm	BLACK
K	THERMELT	1	867 AMBER COLOR	N/A
J	WIRE	1	UL1015 26AWG	YELLOW
I	WIRE	1	UL1015 18AWG	BLACK
H	WIRE	1	UL1015 18AWG	RED
G	FEMALE PIN	3	Phosphor Bronze	1u" GOLD PLATING OVER NICKEL PLATING
F	PANEL BODY	1	PA66+30%GF	BLACK
E	GASKET	1	EPDM 70° ADHESIVE	BLACK
D	SCREW	2	STAINLESS STEEL	N/A
C	DUST CAP	1	HYTREL 4056	BLACK
B	LIQUID GLUE	1		BLACK
A	HOUSING	1	PA66+30%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

NOTES:
1. WATERPROOF RATE: IP55
2. ELECTRICAL CHARACTERISTICS
   TEMPERATURE RANGE: −20°C TO +80°C
   CURRENT RATING: 10A
   DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR ONE MINUTE
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS
6. 螺絲,防塵蓋以附件形式包裝出貨
7. THE TORQUE OF SCREWING 3.5KGF MAX
8. AFTER 5000CYCLES LIFE TEST OF DUST CAP WITHOUT ANY FRACTURES OR CRACKS OF THE BAD SITUATION.



PIN ASSIGNMENTS
FRONT VIEW

WIRE COLOR	CONN.
YELLOW	3
BLACK	2
RED	1
PIN OUT	

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	3PIN POWER SOCKET(10A)		
DWN	YF	PART NO.2CT3020-W034A7	
CHKD	Harlen	SCALE 2:1	UNIT: mm
APVD	Quan	SIZE: A3	SHEET:1 OF 1 REV:E

CUSTOMER COPY

文件編號:RD-06-043-A