


PIN COLOR	PIN OUT
GREEN	3
BLACK	2
RED	1

NOTES:

1. WATERPROOF RATE: IP67
2. ELECTRICAL CHARACTERISTICS
3. CURRENT RATING: 10A
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR ONE MINUTE
5. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS"
6. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING. [cert. pass]
8. 螺絲 螺母及防護蓋以附件形式包裝出貨
9. THE TORQUE OF SCREWING 3.5KGf MAX
10. AFTER 5000CYCLES LIFE TEST OF DUST CAP WITHOUT ANY FRACTURES OR CRACKS OF THE BAD SITUATION.
11. MECHANICAL CHARACTERISTICS:
12. INSERTION FORCE: 0.05~2.5kgf
13. WITHDRAWAL FORCE: 0.05~2.5kgf
14. 10.E-BIKE DISCHARGE CONNECTOR :
15. RATING: 300V DC 10AMP
16. CONNECTOR CONTACT RESISTANCE: <20mohm.
17. 11.FLUSH HOLDER : JEF-703S SPEC OR EQU.
18. 12.LIFE TEST: 3000 INSERTION/EXTRACTION CYCLES (NO WATERTIGHT TEST) AND LOCK 500 CYCLES

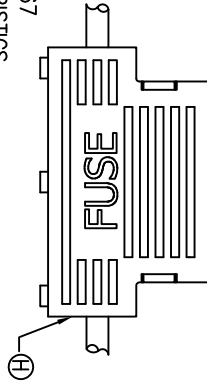

ITEM	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
M	TERMINAL	2	KST MPFNVD0.5-078	WHITE
L	SHRINK TUBE	3	φ3.0*15mm	BLACK
K	NUT	2	STAINLESS STEEL	N/A
J	WIRE	1	UL1007 22AWG	GREEN
I	WIRE	1	UL1015 18AWG	BLACK
H	FUSH HOLDER	1	ATU IN-LINE FUSH HOLDER	RED WIRE
G	FEMALE PIN	3	Phosphor Bronze	1u" GOLD PLATING OVER NICKEL PLATING
F	PANEL BODY	1	PA66+GF	BLACK
E	GASKET	1	EPDM	BLACK
D	SCREW	2	STAINLESS STEEL (Drop-resistant)	N/A
C	DUST CAP	1	HYREL 4056	BLACK
B	LIQUID GLUE	1	N/A	BLACK
A	HOUSING	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司

TITLE: 3PIN POWER SOCKET(10A)

DWN: YF PART NO. 2CT9020-W034B5H

CHKD: Harlan SCALE 2:1 UNIT: mm

APVD: Steve SIZE: A3 SHEET: 1 OF 1 REV: A

REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO: T140903-1A	YF	2014.11.04