

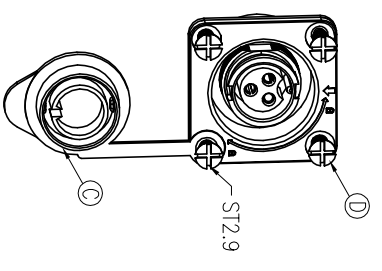


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	T160608-3A	Yang	2016.12.29

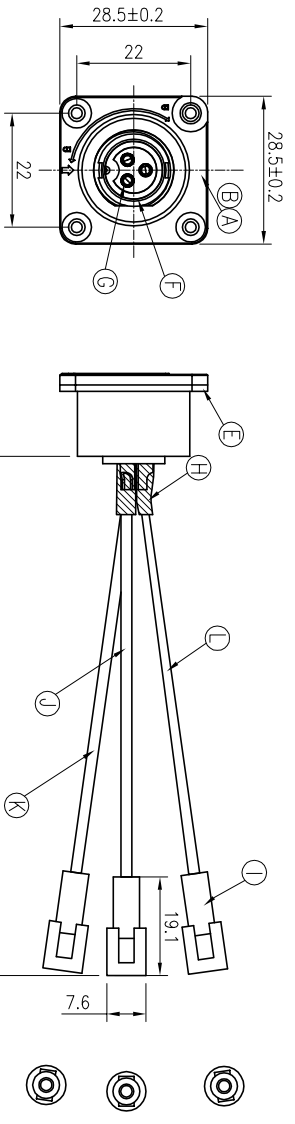

3	GREEN
2	BLACK
1	RED
CONN.1	WIRE COLOR
PIN OUT	
CONN.1	



PIN ASSIGNMENTS  
FRONT VIEW

- NOTES:
- ELECTRICAL CHARACTERISTICS:  
1-1 CURRENT RATING: 10 AMPS.  
1-2 BREAKDOWN VOLTAGE: 1000 VAC PER MINUTE.
  - ENVIRONMENTAL:  
2-1 OPERATING TEMPERATURE: -20°C TO +80°C.  
2-2 SEALING REQUIREMENTS: IP55.
  - LIFE TEST: 1,000 CYCLES Min.
  - OTHER GENERAL SPEC TO REFER "CIRCULAR SERIES GENERAL SPEC".
  - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
  - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
  - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  - 螺絲, 防護蓋以附件形式包裝出貨
  - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR\_PASS**.

L	WIRE	1	UL 1015 20AWG	GREEN
K	WIRE	1	UL 1015 20AWG	BLACK
J	WIRE	1	UL 1015 20AWG	RED
I	CONNECTOR	3	TERMINAL:A00103BS-2	N/A
H	HEAT SHRINK TUBE	3	HOUSING:P1-A00103	WHITE
G	FEMALE PIN	3	125°C 300V	BLACK
F	PANEL BODY	1	PHOSPHOR BRONZE	GOLD PLATING OVER Ni
E	GASKET	1	PA66+GF	BLACK
D	SCREW	4	EPDM	BLACK
C	DUST CAP	1	STAINLESS STEEL	N/A
B	LIQUID GLUE	1	HYTREL 4056	BLACK
A	HOUSING	1	/	BLACK
NO	DESCRIPTION	1	PA66+GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1°
X.XX : ±0.2	

Singatron Enterprise Co., Ltd.  
信亨企業股份有限公司

TITLE	3PIN POWER SOCKET 10A
DWN	Yang
CHKD	Harlen
APVD	Steve

PART NO.	2CT3020-W034G3H
SCALE	2:1
UNIT	mm
SHEET	1 OF 1
REV	A

CUSTOMER COPY