

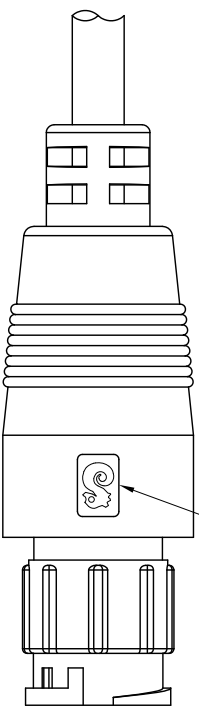



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150114-10A	Yang	2015.02.28

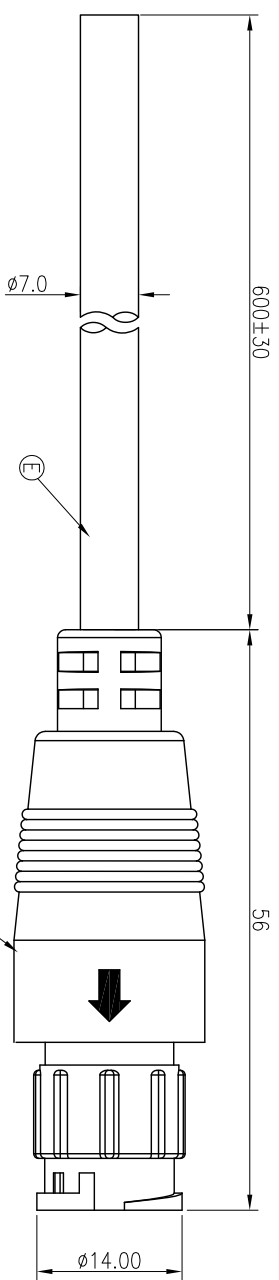

BROWN	3
BLUE	2
BLACK	1
WIRE COLOR	CONN.
PIN OUT	




Pin Assignments  
Front View

- NOTES:
1. WATERPROOF RATE: IP65
  2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
  3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PASS**

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	CABLE	1	UL2464 16AWG*3C+ A(UV RESISTANT) Ø7.0	BLACK PVC JACKET
D	INNER MOLD	1	PVC	BLACK
C	OVER MOLD	1	PVC	BLACK
B	MALE PIN	3	BRASS	GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
XX :±0.3	XX :±1°
XXX :±0.2	

 Singatron Enterprise Co., Ltd.  
 信亨企業股份有限公司  
 CIRCULAR STANDARD SIZE (IP65)  
 MALE CONN. MALE 3PIN(10A) LOCK TYPE  
 DMW Yang **PART NO.2CT3024-W03420H**  
 CHKD JF SCALE 2:1 UNIT: mm  
 APVD Harden SIZE: A3 SHEET:1 OF 1 REV: A  
**CUSTOMER COPY**