

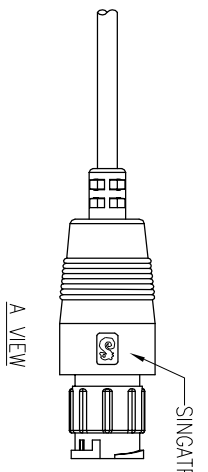


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PDR NO.:T180509-3A	Jun	2019.01.16

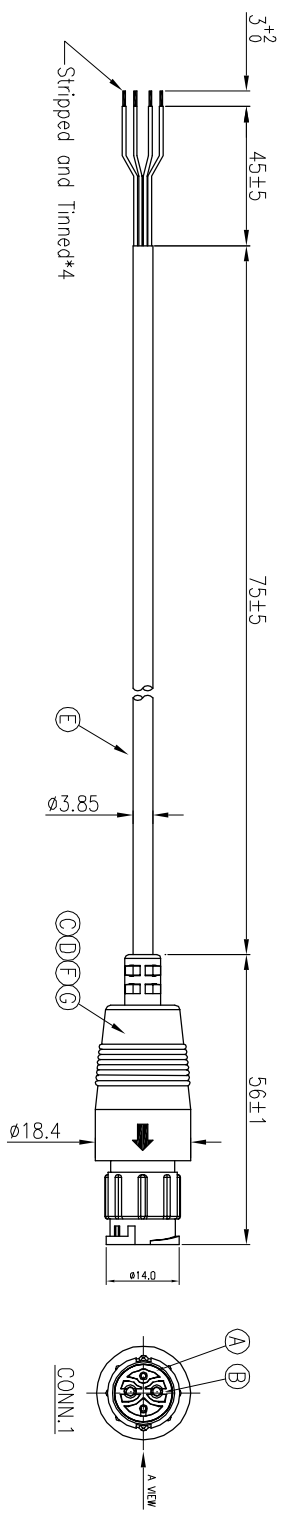

ORANGE 26AWG	4
GREY 24AWG	3
RED 26AWG	2
BLACK 24AWG	1
WIRE COLOR	CONN.1
PIN OUT	CONN.1



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE:-20°C TO +80°C
CURRENT RATING: 3A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	LIQUIDE GLUE	1	N/A	BLACK
F	HEAT SHRINK TUBE	4	125°C 300V	BLACK
E	CABLE	1	NL 2C*24AWG + 2C*26AWG+AL	BLACK
D	INNER MOLD	1	TPU	BLACK
C	OVER MOLD	1	PVC	BLACK
B	FEMALE PIN	4	PHOSPHOR BRONZE	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES: TITLE

X :±0.5 X :±2
 X.X :±0.3 X.X :±1°
 X.XX :±0.2

CIRCULAR STANDARD SIZE
 MALE CONN. FEMALE (2+2)PIN LOCK TYPE
PART NO.2CT3030-W04811H
 SCALE 1:1 UNIT: mm
 SIZE: A3 SHEET: 1 OF 1 REV: A
CUSTOMER COPY