


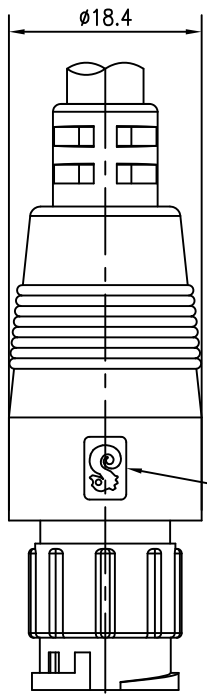
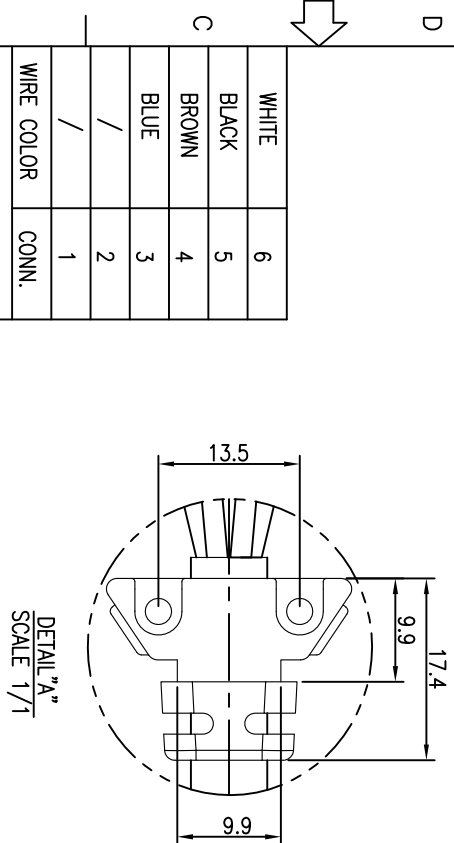


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S101026-4A	Shown	2010.12.16

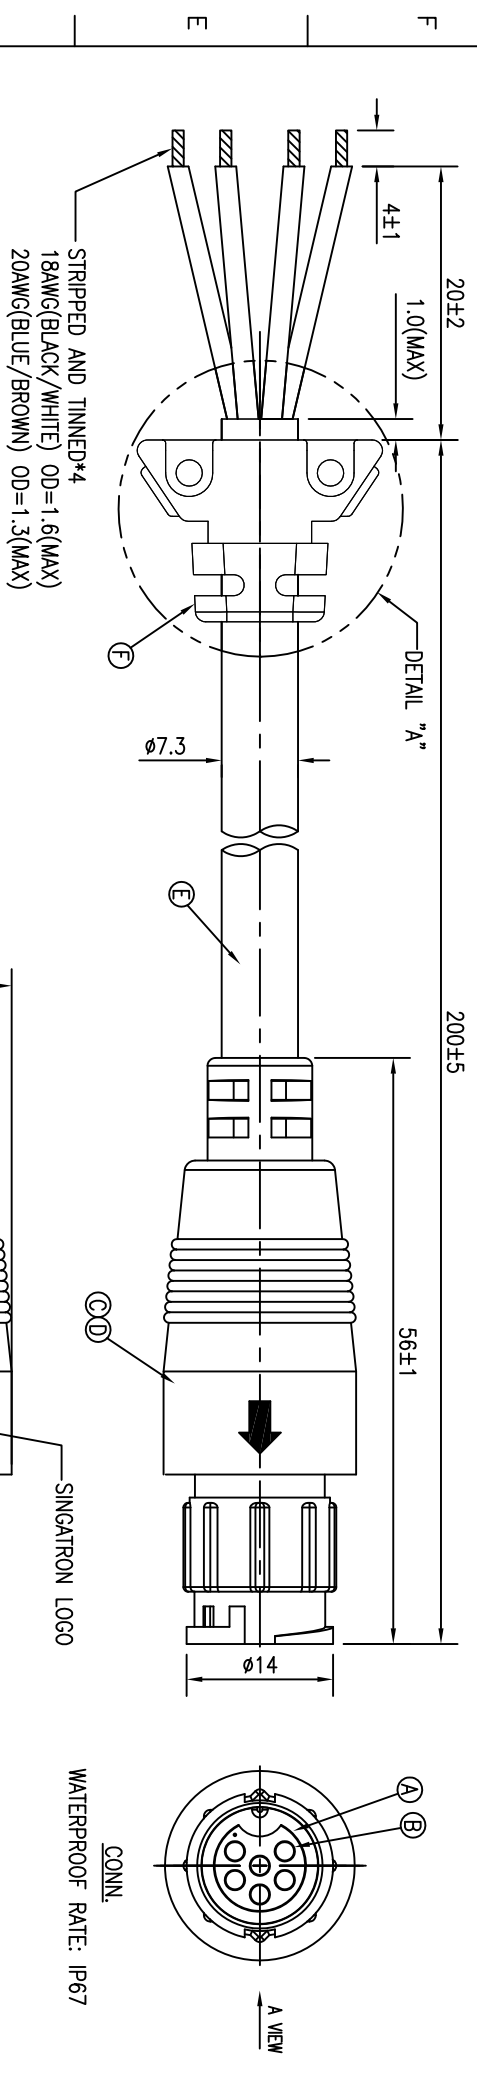

WHITE	6
BLACK	5
BROWN	4
BLUE	3
/	2
/	1
WIRE COLOR	CONN.



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [GPR 25AS]

F	OVER MOLD	1	HYTREL	BLACK
E	CABLE	1	UL2464 20#*2C+ 18#*2C UV RESISTANT OD=Ø7.3	BLACK(PVC JACKET)
D	INNER MOLD	1	TPU	NATURAL
C	OVER MOLD	1	PVC	BLACK
B	FEMALE PIN	6	PHOSPHOR BRONZE	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X.XX :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信普企業股份有限公司
CIRCULAR STANDARD SIZE (IP67)
M CONN. F PIN 6 PIN(5A) LOCK TYPE

PART NO. 2CT3030-W06302

SCALE 1:1 UNIT: mm

SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY