

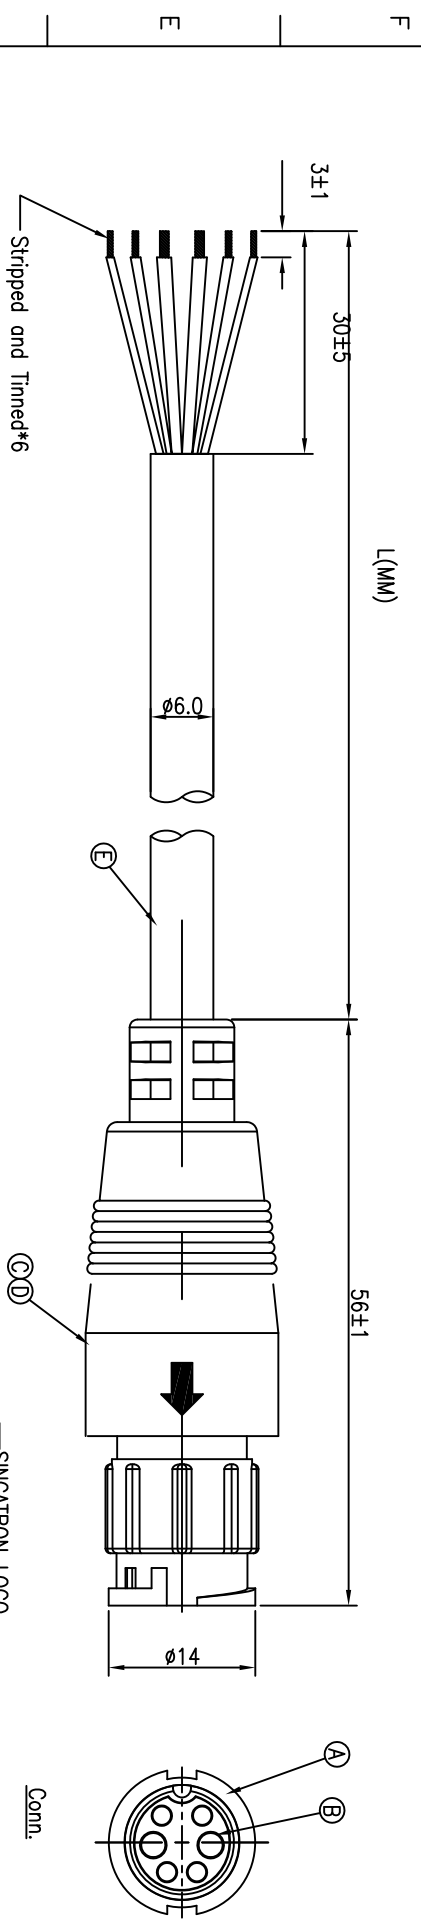


REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO:S100915-1B~1D	LILY	2010.10.27



GREEN(24#)	6
RED(18#)	5
YELLOW(24#)	4
WHITE(24#)	3
BLACK(18#)	2
BLUE(24#)	1
WIRE COLOR	CONN.

P/N	CABLE L(MM)
2CT3030-W06802	L=1000±50
2CT3030-W06803	L=1500±75
2CT3030-W06804	L=2000±100
2CT3030-W06805	L=2500±100

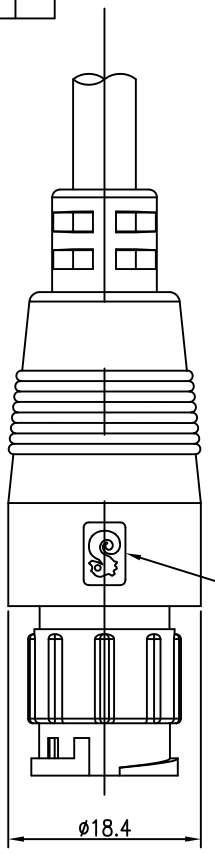

Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [C.R. 21453]

E	CABLE	1	UL2464 24#*4C+ 18#*2C+AL (UV RESISTANT)	BLACK (PVC JACKET)
D	INNER MOLD	1	PVC	BLACK
C	OVER MOLD	1	PVC	BLACK
B	MALE PIN	6	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1'
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)
WALE CONN. FEMALE (2+4)PIN(10+5)A LOCK TYPE

TITLE	PART NO. 2CT3030-W0680X
DWN	LILY
CHKD	Steve
APVD	Max
SCALE	2:1
UNIT	mm
SIZE	A3
SHEET	1 OF 1
REV	A

CUSTOMER COPY

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8