




| REV. | ECN NO. | OR DESCRIPTION | REVISED | DATE |
|------|--------------------|----------------|---------|------------|
| A | PDR NO.:S150203-4A | | Vicky | 2015.01.19 |
| B | ECN NO.:S150309-C | | Vicky | 2015.03.09 |
| C | ECN NO.:S160851-R | | Vicky | 2016.08.24 |

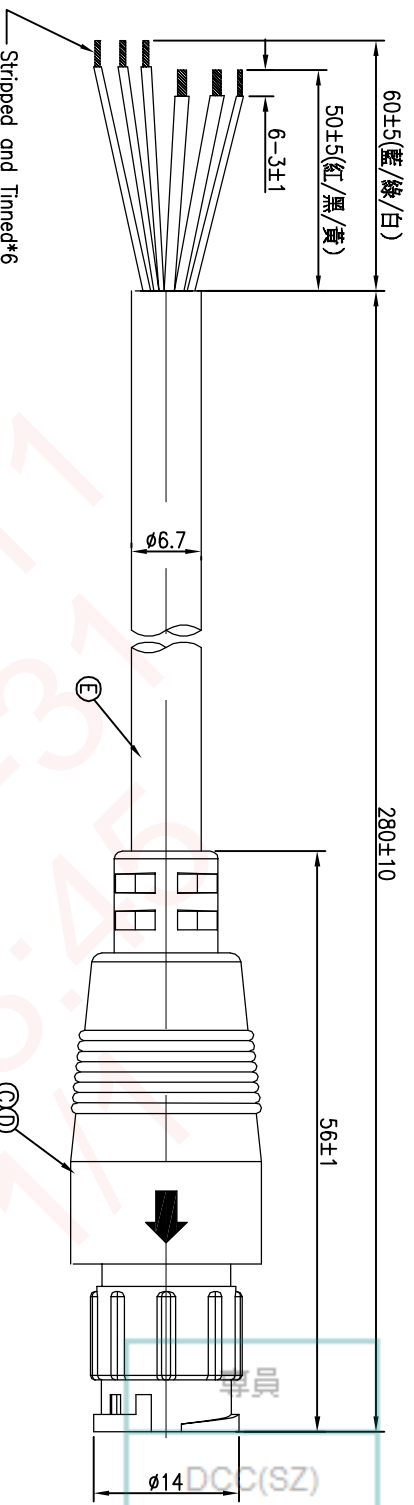

| | |
|-------------|-------|
| GREEN(24#) | 6 |
| RED(16#) | 5 |
| YELLOW(24#) | 4 |
| WHITE(24#) | 3 |
| BLACK(16#) | 2 |
| BLUE(24#) | 1 |
| WIRE COLOR | CONN. |
| PIN OUT | |



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSSED IN 1M WATER FOR 30 MINUTES
 2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

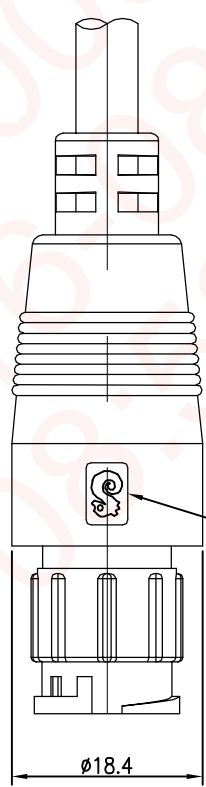

| NO | DESCRIPTION | QTY | MATERIAL | PLATING & COLOR |
|----|-------------|-----|---|---|
| A | BODY | 1 | NYLON+33%GF | BLACK |
| B | MALE PIN | 6 | BRASS | 6u" GOLD PLATING OVER NICKEL PLATING |
| C | OVER MOLD | 1 | PVC | BLACK |
| D | INNER MOLD | 1 | TPU | NATURAL |
| E | CABLE | 1 | UL2464 24#*4C+ 16#*2C+AL (UV RESISTANT) | BLACK (PVC JACKET) |

| DECIMALS: | ANGLES: | TITLE | SCALE | UNIT | SHEET | REV |
|-------------|-----------|---|----------|------|-------|-----|
| X :.0.5 | X :.±2 | CIRCULAR STANDARD SIZE (IP67) | 2:1 | mm | 1 | C |
| X.X :.±0.3 | X.X :.±1' | MALE CONN. FEMALE (2+4)PIN(10+5)A LOCK TYPE | | | | |
| X.XX :.±0.2 | | PART NO.2CT19030-W06823H | | | | |
| | | APVD Steve | SIZE: A3 | | | |

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

CUSTOMER COPY