
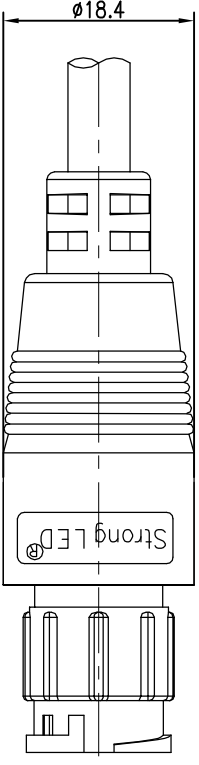




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S151230-11E	Wcky	2015.12.28

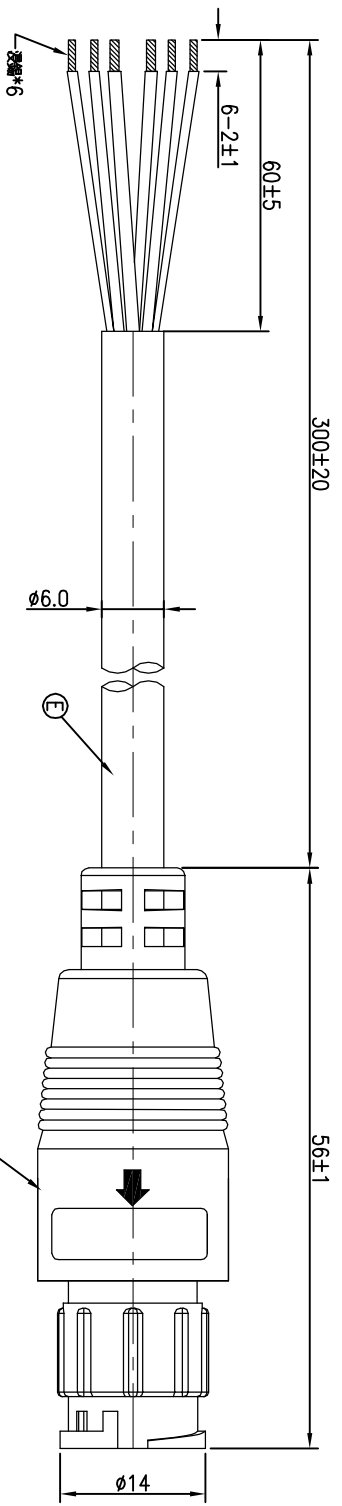

黑 (24AWG)	6
灰 (20AWG)	5
藍 (24AWG)	4
綠 (24AWG)	3
白 (20AWG)	2
紅 (24AWG)	1
芯線顏色	CONN.

客戶料号: YF01-LM-24A-6P-XH/B/300-60/2

- 注意:
1. 防水等級: IP67
 2. IP67: 切邊在1米深的水中30分鐘;
 3. 指定電壓: 5A+10A(線跟接頭)
 4. 規格符合圓形連接器及插頭;
 5. 符合無害物質管理規範;
 6. 黃色產品包裝袋:



Pin Assignments
Front View

E	線材	1	20AWG*2C+24AWG*2P OD6.0	BLACK(PVC JACKET)
D	內襯	1	TPU	NATURAL
C	外襯	1	PVC	BLACK
B	端子	6	COPPER ALLOY	1~3µ" GOLD PLATING OVER NICKEL PLATING
A	膠芯	1	PA66+30%GF	BLACK COLOR
NO	產品編號		材質	電鍍 & 顏色

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	CIRCULAR STANDARD SIZE (IP67)
DMN	MALE CONN. FEMALE 2+4PIN(10A+5A) LOCK TYPE
CHKD	Vicky
APVD	Harlen
PART NO.	2CT93030-W06833H
SCALE	2:1
UNIT:	mm
SIZE:	A3
SHEET:	1 OF 1
REV:	A

CUSTOMER COPY