


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	IVY-C	2014.06.10
B	ECN NO:L140080	IVY-C	2014.07.16

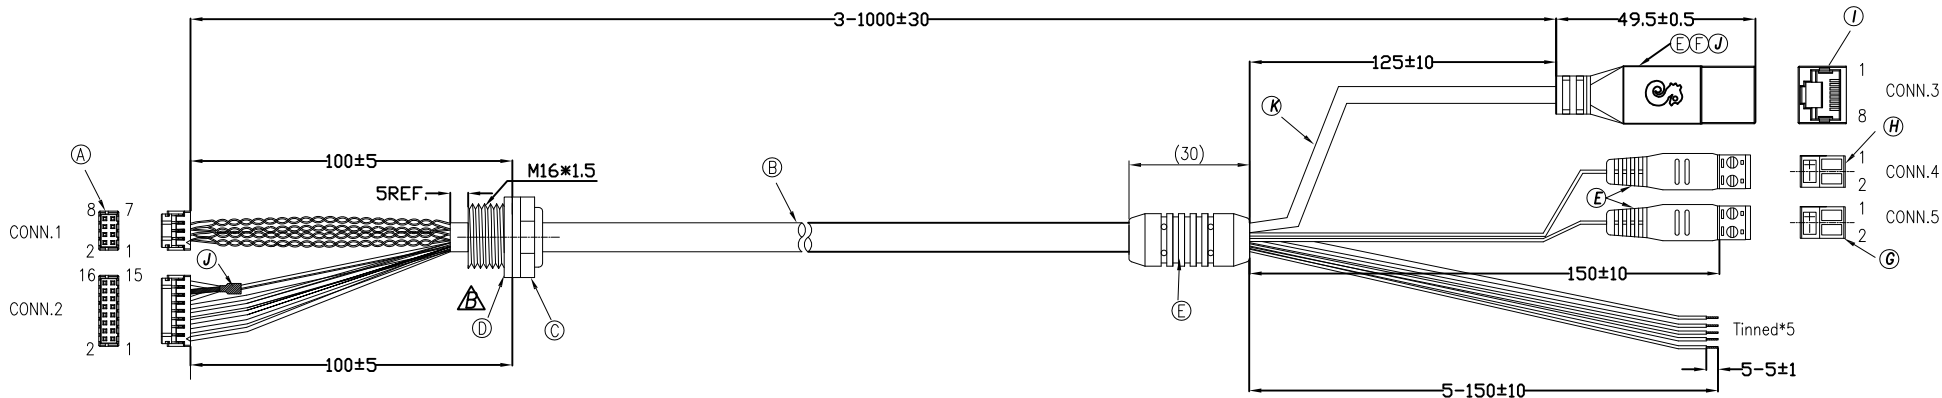

SPECIFICATIONS:

1. CONDUCT RESISTANCE:  $3\Omega$  Max.
2. INSULATION RESISTANCE:  $10M\Omega$  MIN. BY 250 VDC
3. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **[RoHS]**
5. PACKING: SEE "2CT3100-W00229H" PACKAGE.
6. OTHER GENERAL SPEC. TO REFER "2CT3100 SERIES SPEC".

7	ORANGE/WHITE	1	Twist	16	WHITE(28#COAX)		+	
5	ORANGE	2		14	SHIELD(COAX)		-	-
3	GREEN/WHITE	3	Twist	12	RED(28#COAX)			+
1	GREEN	6		13	BROWN(24#)	S/T	CONN.4	CONN.5
8	BLUE/WHITE	5	Twist	9	BLACK(24#)	S/T		
6	BLUE	4		6	YELLOW(26#)	S/T		
2	BROWN/WHITE	7	Twist	4	ORANGE(26#)	S/T		
4	BROWN	8		2	RED(26#)	S/T		
CONN 1	WIRF COLOR	CONN 3		CONN 2	WIRF COLOR			

K	TUBE	1	PVC	BLACK
J	TUBE	10	300V 125°C	BLACK
I	CONNECTOR	1	RJ45 8P8C JACK	BLACK
H	CONNECTOR	1	MINI TERMINAL BLOCKS	GREEN
G	CONNECTOR	1	MINI TERMINAL BLOCKS	RED
F	INNER MOLD	1	PE	NATURAL
E	OVER MOLD	4	PVC	BLACK
D	GASKET	1	SILICONE	BLACK
C	SR	1	ABS	BLACK
B	CABLE	1	UL20276 CAT5e*26#4P 28#COAX*2C+24#2C+ 26#3C+AL OD7.3	BLACK
A	CONNECTOR	16	PHOSPHOR BRONZE	TINNED
		2	NYLON66	WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:	ANGLES:	TITLE	CABLE
X :±0.5	X :±2°	DWN	NY-C 2014.07.16 PART NO. 2CT3100-W00229H
X.X :±0.3	X.X :±1°	CHKD	SCALE:1.4:1 UNIT: mm
X.XX :±0.2		APVD	ANGELA2014.07.16 SIZE: A3 SHEET:1 OF 1 REV: B
<b>CUSTOMER COPY</b>			