


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T190614-2B	Vicky	2019.06.19

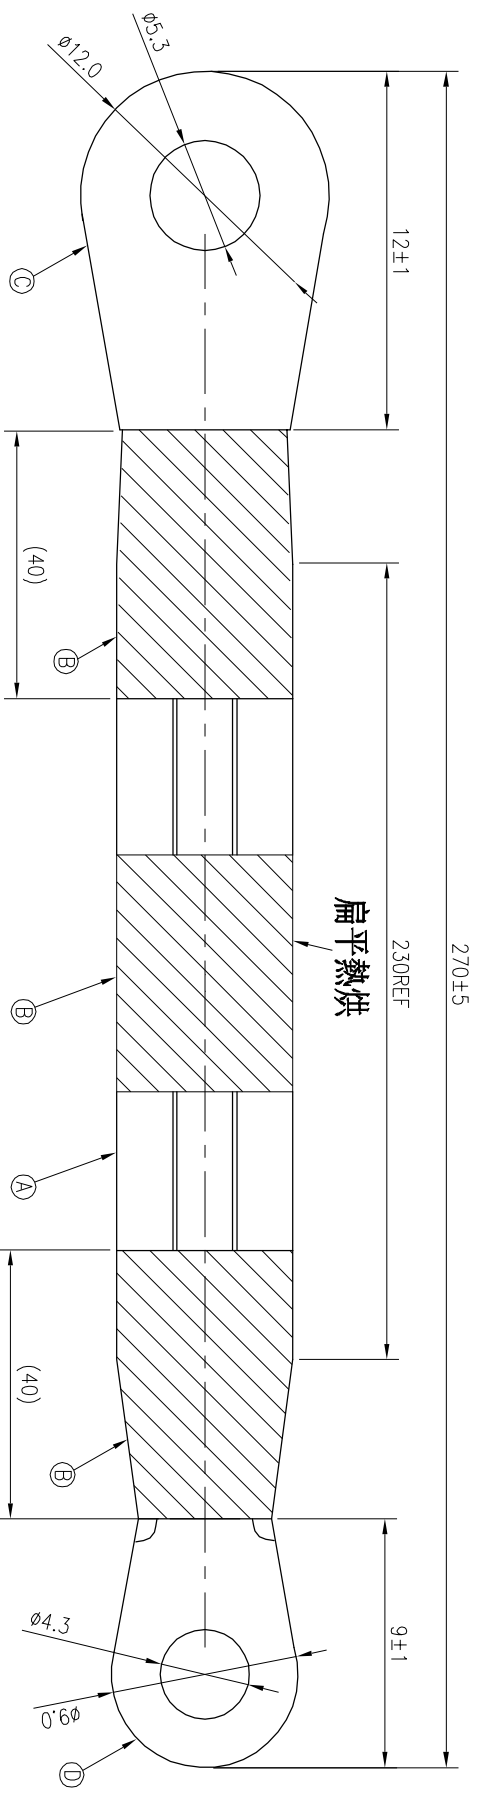

- NOTES:
1. TERMINAL PULLING FORCE: 70kgf(Min.)
 2. TERMINAL RIVETING: HIGH:5.0±0.5mm, WIDE:7.8±0.5mm
 3. OPERATING TEMPERATURE: -20°C TO +80°C.
 4. FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 5. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 6. TO CONFORM TO ROHS REQUIREMENT AND REACH REGULATION
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:**[G.P. Pass]**.

D	TERMINAL	1	P/N:R8-4(SURPLUS)	NICKEL PLATED
C	TERMINAL	1	P/N:R8-5M(SURPLUS)	NICKEL PLATED
B	HEAT SHRINK TUBE	3	Ø8.0 125° 600V L=40	BLACK
A	WIRE	1	UL 1015 12AWG	RED
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

蘇州信營汽車電子有限公司
Suzhou Singatron Auto Electronics CO.,LTD.

DECIMALS:		ANGLES:	
X	:±0.5	X	:±2°
X.X	:±0.3	X.X	:±1°
X.XX	:±0.2		

TITLE	GROUND WIRE WITH RING TERMINAL		
DWN	Vicky	PART NO.2CT3100-W00468H	
CHKD	Cerry	SCALE 2:1	UNIT: mm
APVD	William	SIZE: A4	SHEET: 1 OF 1

CUSTOMER COPY