

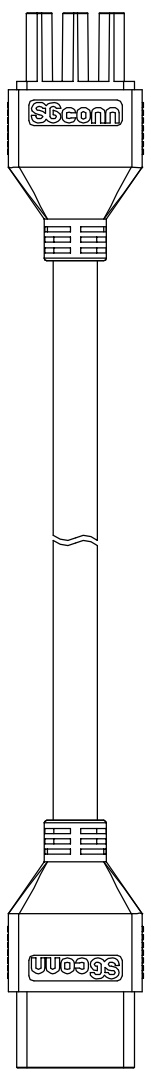


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A191021-2C		Jun	2020.07.13

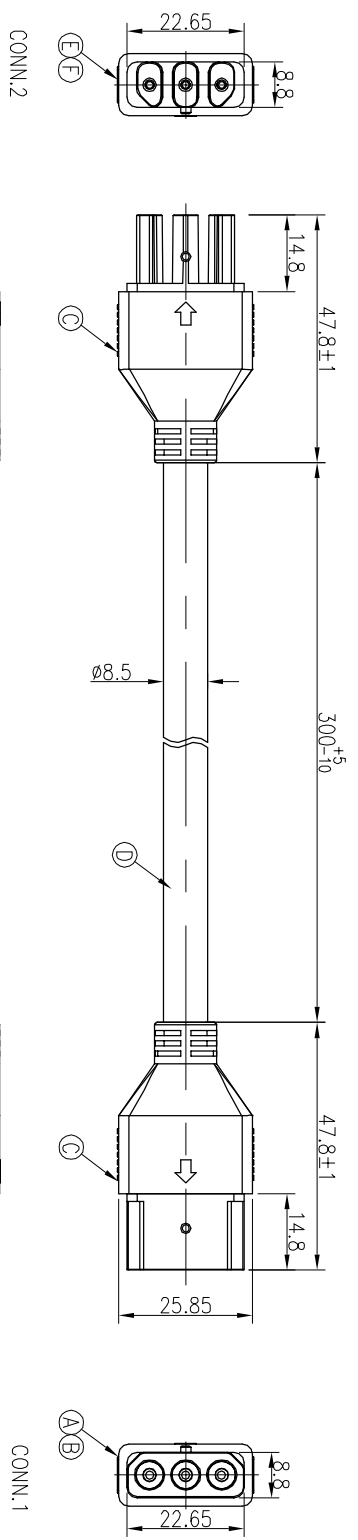

3	YELLOW/GREEN	3
2	BROWN	2
1	BLUE	1
CONN.1		CONN.2
PIN OUT		

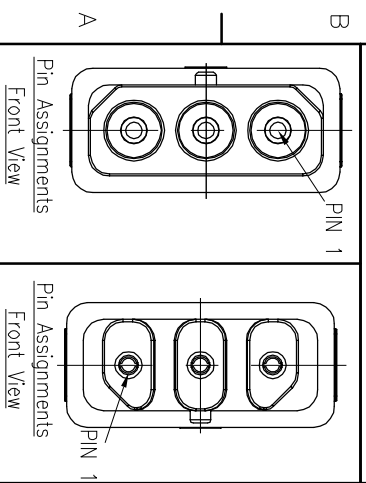

- NOTES:
- ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C~60°C
CURRENT RATING: 10A
VOLTAGE RATING: 250V AC
 - TEST CONDITIONS:
INSULATION RESISTANCE: 100MΩ MIN. BY 1000 VDC
 - OTHER GENERAL SPEC. TO REFER CIRCULAR SERIES SPEC."
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	FEMALE PIN	3	Phosphor Bronze	(1~3)µm Gold Plating Over Nickel Plating
E	FEMALE BODY	1	NYLON	BLACK
D	CABLE	1	16AWG*3C UL SJT & CE & CCC	PVC(BLACK)
C	OVER MOLD	2	PVC	BLACK
B	MALE PIN	3	BRASS	(1~3)µm Gold Plating Over Nickel Plating
A	MALE BODY	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	POWER CABLE WITH CABLE
DWN	Jun
CHKD	Gerry
APVD	William
PART NO.	2CT3100-W00478H
SCALE	2:1
UNIT:	mm
SHEET:	1 OF 1
REV:	A

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

CUSTOMER COPY