

1 2 3 4 5 6 7 8

F






E

D

C

B

A

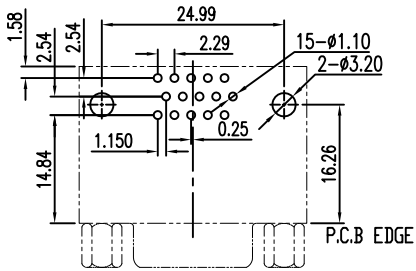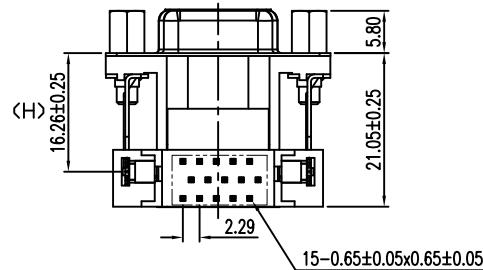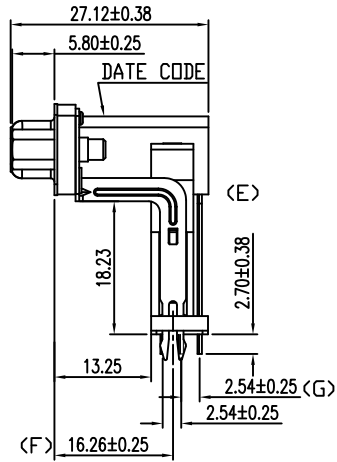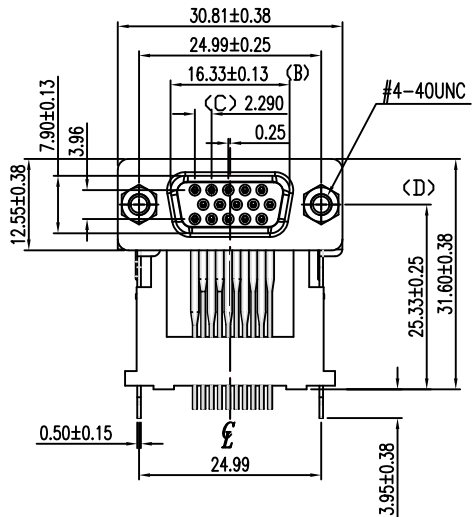

RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(H)

SPECIFICATIONS

- 1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

NOTES

- 1. MATERIAL:
Housing:PBT, UL 94V-0, Color:Blue.
Bracket:PA66, UL 94V-0, Color:Blue.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Steel.
Screw:Steel.
- 2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Matte Tin Plated over Nickel at Solder Area.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Screw:Nickel Plated.
- 3. This Product is LEAD-FREE & RoHS Compliance Product.

2D334XXX XXXXXXXD0-F

SERIES NO.	D: IT'S COMPLIANT WITH RoHS & DATE CODE
NUMBER OF POSITION H1: 15-POSITIONS (HI-DEN)	INSULATOR MATERIALS 1: PBT D: HOUSING-PBT, BRACKET-PA66
CONTACT STYLE S: SOCKET	COLOR STYLE 1: ALL BLACK 2: ALL BLUE
CONTACT MATERIALS 1: BRASS E: DIP 2.7mm & BRASS	FLANGE MOUNTING OPTION 1: #4-40 THREADED HOLE 2: M3 THREADED HOLE 4: #4-40 THREADED SCREWLOCK CLINCHED-MOUNT INSTALLED A: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED (4.8x11.8) E: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED (5.8x13.0) F: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK BULK-PACKED (5.8x13.0)
CONTACT FINISH 1: G/F BRIGHT TIN 3: 15u" GOLD BRIGHT TIN 4: 30u" GOLD BRIGHT TIN 7: G/F MATTE TIN	BOARD MOUNTING OPTION 2: DUAL ARROWHEAD BOARDLOCK
FRONT SHELL FINISH 1: TIN 2: NICKEL	

UNLESS OTHERWISE SPECIFIED TOLERANCE
mm: .00 = ±0.25
.000 = ±0.13
Ang: 0.0 = ±2°

A1	設變支架	2013.12.06
A0	An issue.	2012.12.10
REV.	CONTENTS	DATE

Singatron Enterprise Co., Ltd.			
TITLE	D-SUB 15 FEMALE HIGH DENSITY HIGH RAISE		
DWN	Zmsheng	PART NO.	2D334H1SE722E2DD0-F
CHKD	He Wei	SCALE 1:1	UNIT: mm
APVD	LeeJunDe	SIZE: A3	SHEET: 1 OF 1 REV: A1
CUSTOMER COPY			

1 2 3 4 5 6 7 8