
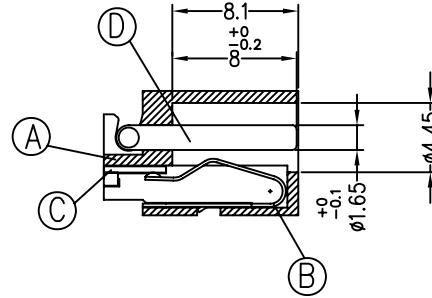
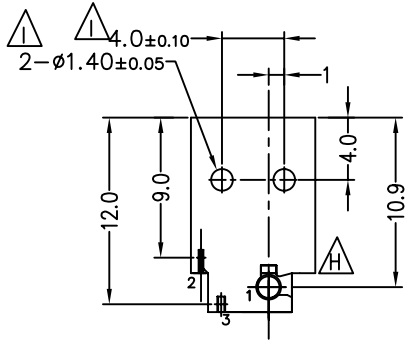

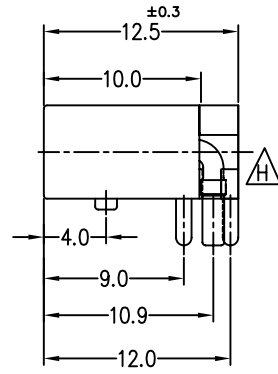




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
G	ECN NO:940007	AMY	1/7-'04
H	ECN NO.C080243 DESIGN CHANGE	HAIHUA	2/9'09
I	Modify tolerance ECN NO.C080289-4/6	HAIHUA	5/21'09

SPECIFICATIONS:


- 1.RATING: DC 30V 2.5A
- 2.OTHERS SEE " DC POWER JACK SPECIFICATIONS".
- 3.PACKING: TAPE&REEL.
- 4.SOLDER HEAT RESISTANCE:PEAK TEMP. 260°C 10 SECS.
5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- 6.GREEN PRODUCT IDENTIFICATION MARK IN JACK:
- 7.GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**
- 8.FOR LEAD-FREE PROCESS.

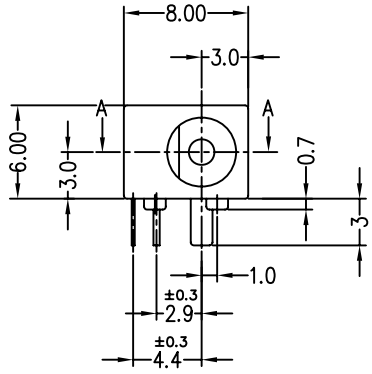


A-A SECTION

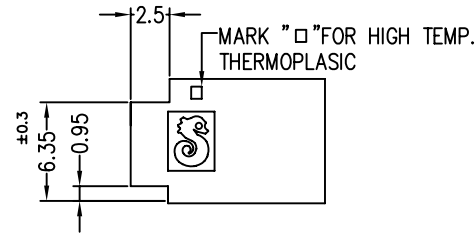

CIRCUIT

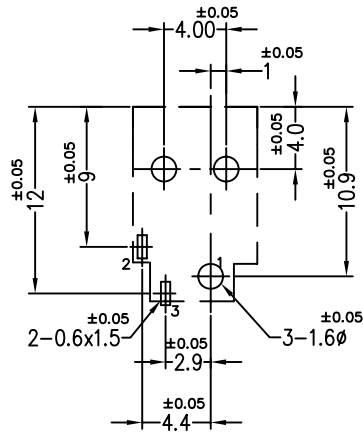

RECOMMENDED P.C.B LAYOUT  
SOLDER SIDE

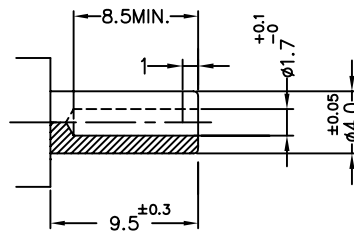

MATE PLUG

D	CONTACT PIN	1	BRASS BAR	NICKEL PLATING
C	SHUNT TERMINAL	1	BRASS 0.4t	SILVER PLATING
B	TIP SPRING	1	COPPER ALLOY 0.2t	SILVER PLATING
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE  
SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.  
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE	DC POWER JACK	
X : ±0.5	X : ±2°	DWN HAIHUA 5/21'09	PART NO. 2DC-0018-002	
XX : ±0.3	XX : ±1°	CHKD	SCALE 3:1	UNIT: mm
XXX : ±0.2		APVD ROBIN 5/21'09	SIZE: A4	SHEET: 10F1

CUSTOMER COPY