



- 12FOR WAVE SOLDERING LEAD-FREE PROCESS.
- DD: DAY
MM: MONTH
YY: YEAR
- MARK "□" FOR HIGH TEMP. THERMOPLASTIC.
3. LIFE TEST: 5,000 CYCLES MIN.
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION MARK ON JACK: [G.P. PASS]
6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [G.P. PASS]
7. FOR WAVE SOLDERING LEAD-FREE PROCESS.
8. PRINTED DATE CODE "MMDD" ON TOP OF CONNECTOR.

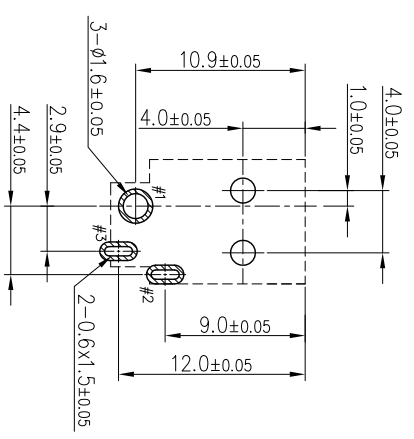

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

MATE PLUG

REV	ECH NO	OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE		BILL	2010.6.30

D	CONTACT PIN	1	BRASS BAR	NICKEL PLATING
C	SHUNT TERMINAL	1	BRASS 0.4t	SILVER PLATING
B	TIP SPRING	1	COPPER ALLOY 0.2t	SILVER PLATING
A	BODY	1	HIGH TEMP THERMOPLASTIC UL 94V-0	YELLOW COLOR(14U)
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

DC POWER JACK

DECIMALS:	ANGLES:	TITLE	DC POWER JACK	
X : ±0.5	X : ±2°	DWN	PART NO.	2DC-0018-011
X.X : ±0.3	X.X : ±1°	CHKD	SCALE 3:1	UNIT: mm
X.XX : ±0.2		APVD	SIZE: A3	SHEET: 10F1
				REV: A

CUSTOMER COPY