

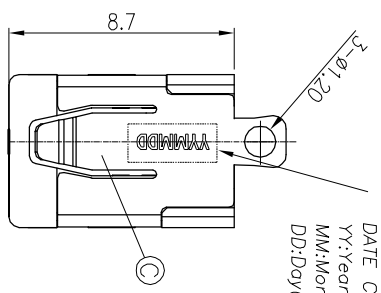

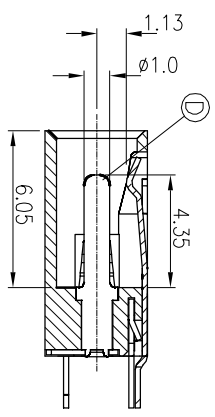


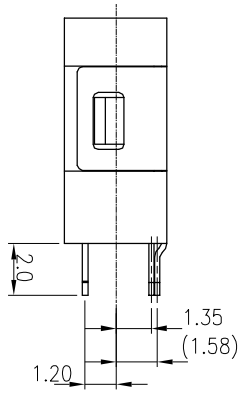


DATE CODE  
 YY:Year(07)  
 MM:Month(01~12)  
 DD:Day(01~31)



Mating Plug only SINGATRON  
 PART NO. ZDP-0053-K02

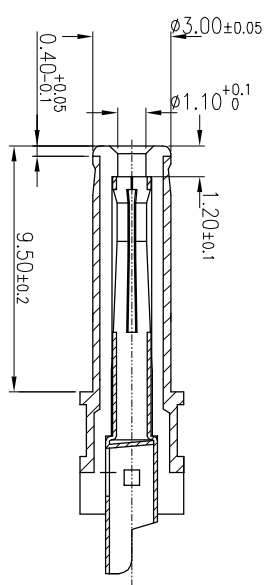

SPECIFICATIONS:

- 1.ELECTRICAL CHARACTERISTICS:
    - 1-1.RATING:20V 3A
    - 1-2.CONTACT RESISTANCE:100mΩ MAX.
    - 1-3.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.
    - 1-4.INSULATION RESISTANCE:100MΩ MIN. MEASURED BY 500V DC.
  - 2.MATING FORCE & UNMATING FORCE:
    - 0.6~3.0Kg(INITIAL) .0.4~2.5Kg(AFTER LIFE TEST).
  - 4.LIFE TEST:5000 CYCLES.
  - 5.OTHER GENERAL SPEC. TO REFER "ZDC-0053-K23F SPEC."
  - 6.TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  7. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
  8. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
  9. PRINTED DATE CODE "MMDD" ON TOP OF CONNECTOR.
- DATE CODE:MMDD (YY:YEAR MM:MONTH DD:DAY)

REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.1120731-1A		Eileen	2012.09.12
B	ECN NO.S170135-Q		YUREN	2017.4.27
C	ECN NO.S180961-R		XUEHUA	2018.09.28

E	TERMINAL	1	COPPER ALLOY 0.2t	可焊Ni 60u"Min
D	PIN	1	BRASS BAR	GOLD FLASH(1u" Min)
C	SHELL	1	COPPER ALLOY 0.2t	可焊Ni 50u" Min
B	SPRING	1	COPPER ALLOY 0.2t	GOLD FLASH ONCONTACT AREAS OVER IN 50u" MIN
A	BODY	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE DC POWER JACK				
DWN	XUEHUA	PART NO.	ZDC-0053-K23F	
CHKD	RON	SCALE	5:1	UNIT: mm
APVD	LUSSEN	SIZE:	A3	SHEET: 1 OF 1 REV:C
CUSTOMER COPY				