
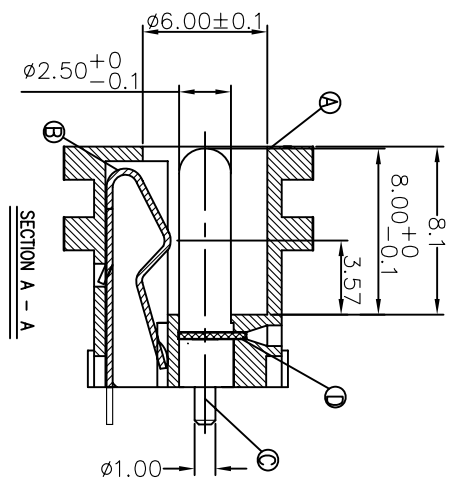






REV: A	ECN NO OR DESCRIPTION	REVISED	DATE
	PRODUCT RELEASE	KENSON	2009.9.22

SPECIFICATIONS:

1. RATING: DC 20V 5.5A
2. INSERTION FORCE: 1.0Kg~3.0Kg
WITHDRAWAL FORCE: 1.0Kg~3.0Kg
3. INSULATION RESISTANCE BETWEEN ANY ADJACENT TERMINALS SHALL NOT BE LESS THAN 100 MEGOHMS BY 500 VOLTS MEGGER.
4. JACK SHALL WITHSTAND 500 VOLTS BETWEEN ANY ADJACENT TERMINAL FOR ONE MINUTE.
5. CONTACT RESISTANCE SHALL NOT EXCEED 30mΩ
6. JACK SHALL WITHSTAND 5,000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AND CONTACT RESISTANCE SHALL NOT EXCEED 60mΩ
7. MEASURING CONDITION:
TEMPERATURE: FROM 5°C TO 35°C.
RELATIVE HUMIDITY: FROM 40% TO 85%.
8. FOR HAND SOLDERING LEAD-FREE PROCESS
9. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
10. GREEN PRODUCT IDENTIFICATION MARK IN JACK: 
11. GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**
12. FOR LEAD-FREE PRODUCT.
13. PRINTED DATE CODE "YMMDD" ON TOP OF CONNECTOR.



SECTION A - A

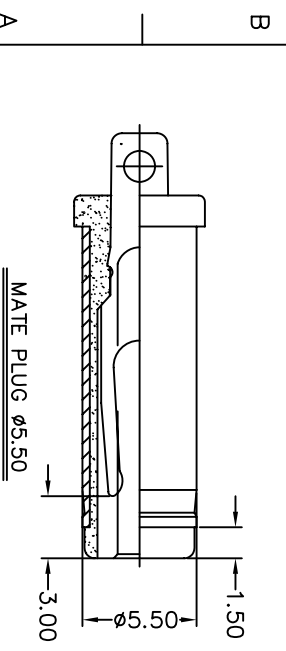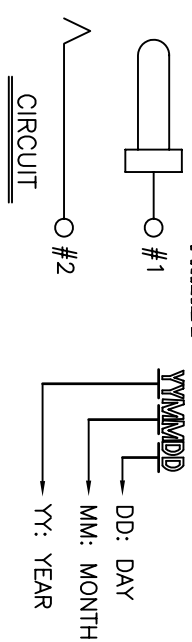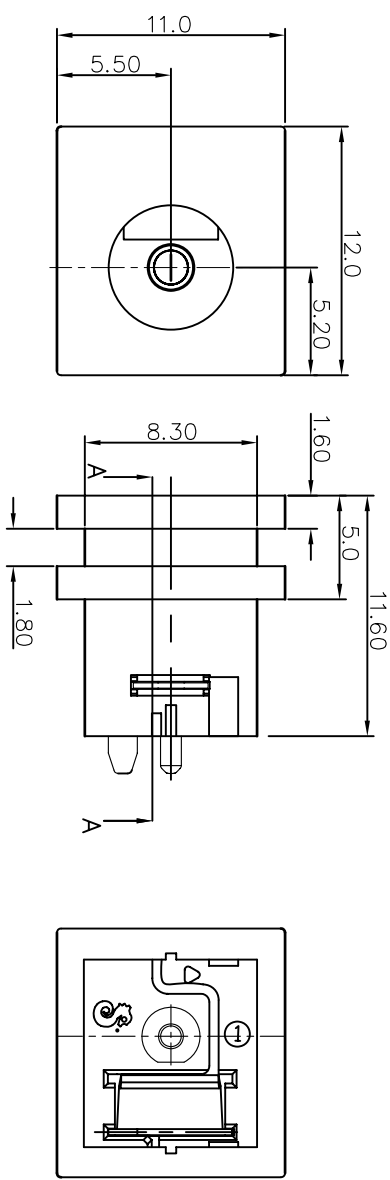

D	TERMINAL	1	STAINLESS 0.3T	N/A
C	PIN	1	BRASS BAR	SILVER PLATING
B	TIP	1	COPPER ALLOY 0.3t	SILVER PLATING
A	BODY	1	PBT+30% GF UL94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

 Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	DC POWER JACK
DWN	KENSON
CHKD	HAREVY
APVD	ROBIN
PART NO.	ZDC-0268-B17
SCALE:	4/1
UNIT:	mm
SIZE:	A3
SHEET:	1 OF 1
REV:	A

CUSTOMER COPY