
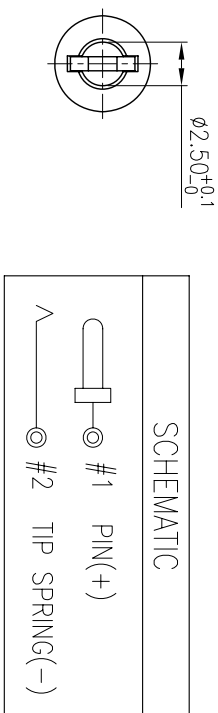
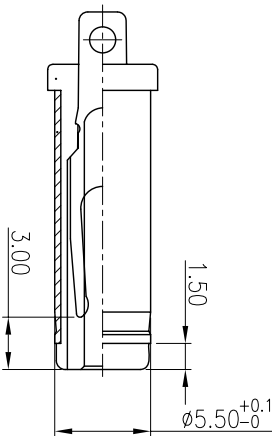
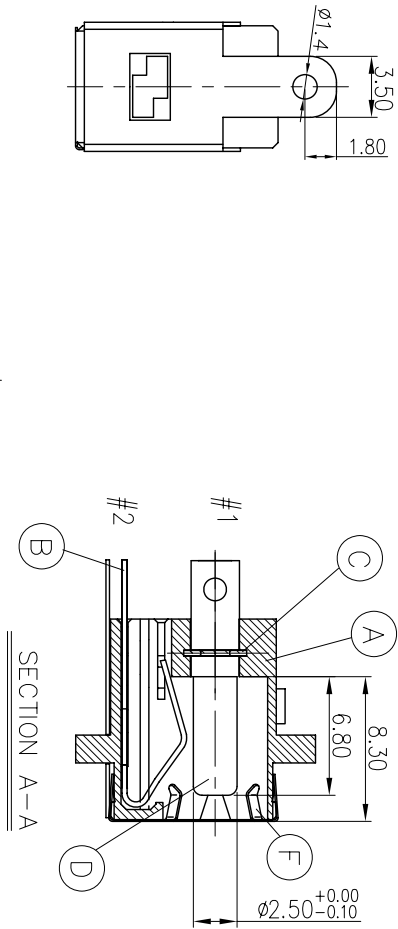


ONLY FOR FOXCONN

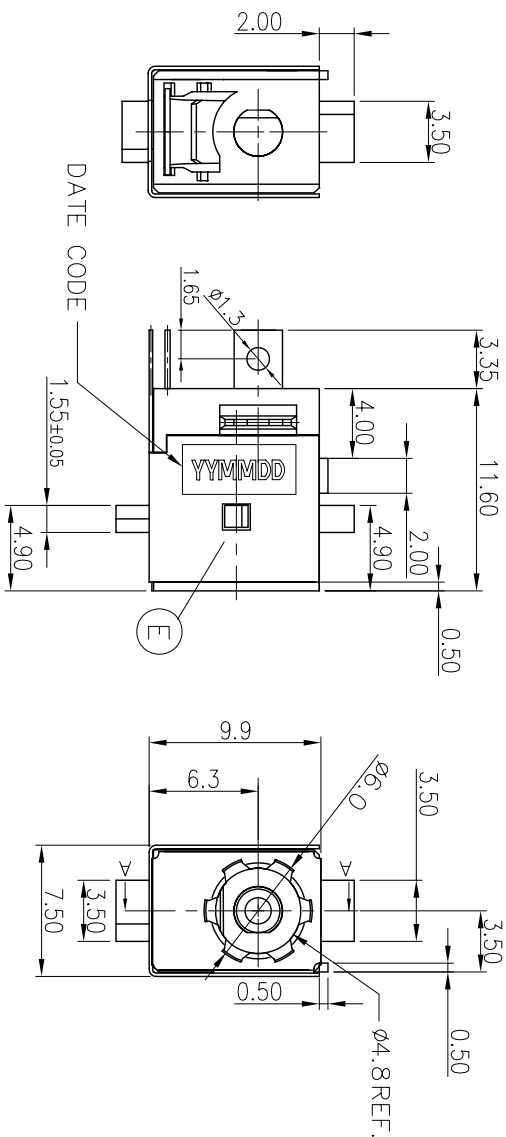


SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: DC 20V 7A
 - 1-2. CONTACT RESISTANCE : 30mΩ Max(INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 100mΩ MIN, MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
- 2-1. INSERTION FORCE: 3.0KG Max.
 - 2-2. WITHDRAWAL FORCE: 0.5KG-3.0KG

- 3. LIFE TEST: 5,000 CYCLES MIN.
- 4. OTHER GENERAL SPEC TO REFER "DC POWER JACK" SPEC
- 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC
- 6. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: ©
- 7. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
- 8. FOR HAND SOLDERING LEAD FREE PROCESS.
- 9. PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.



F	GROUND	1	STAINLESS 0.1T	N/A
E	SHIELDING	1	BRASS STRIP 0.2T	Ni 60u" Min.
D	PIN	1	BRASS BAR	Gold Flash OVER Ni60u"
C	TERMINAL	1	STAINLESS 0.3T	N/A
B	TIP SPRING	1	COPPER ALLOY 0.3T	Ag 20u" Min OVER Ni60u"
A	BODY	1	HERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

信音企業股份有限公司

Singatron Enterprise Co., Ltd.

TITLE	DC POWER JACK			
DWN	Mars	PART NO. 2DC-G756-BC6F	SCALE: 4:1	UNIT: mm
CHKD	Sky	SIZE: A3	SHEET: 1 OF 1	REV: A
APVD	Lussen	CUSTOMER COPY		

DECIMALS: ANGLES:

X	:±0.5	X	:±2°
X.X	:±0.3	X.X	:±1'
X.XX	:±0.2		

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR	NO: C120703-7A	Mars	2012.07.06