



DATE CODE  
 YY: Year (02)  
 MM: Month (01~12)  
 DD: Day (01~31)

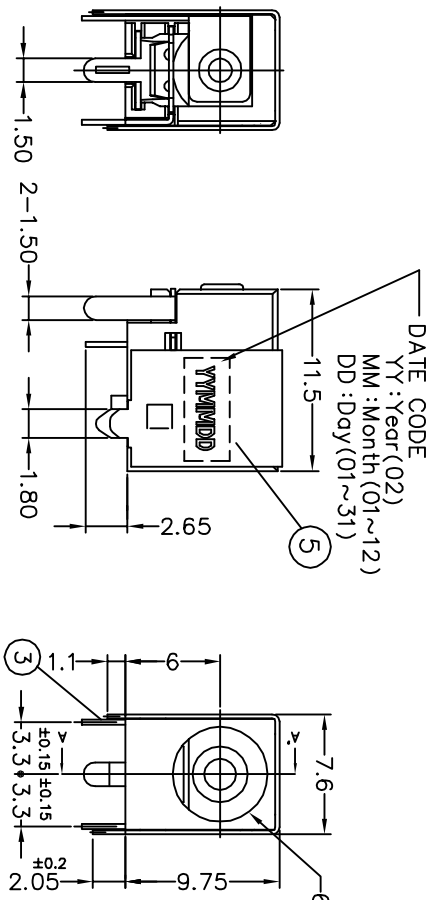

SPECIFICATIONS:


1. RATING: DC 24V 2A
2. INSERTION FORCE: 0.4KG-3.0KG
3. INSULATION RESISTANCE BETWEEN ANY ADJACENT TERMINALS SHALL NOT BE LESS THAN 100 MEGOHMS BY 500 VOLTS MEGGER.
4. JACK SHALL WITHSTAND 250 VOLTS BETWEEN ANY ADJACENT TERMINAL FOR ONE MINUTE.
5. CONTACT RESISTANCE SHALL NOT EXCEED 0.03 OHMS.
6. JACK SHALL WITHSTAND 5,000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AND CONTACT RESISTANCE SHALL NOT EXCEED 0.1 OHMS.
7. MEASURING CONDITION:  
 TEMPERATURE: FROM 5°C TO 35°C.  
 RELATIVE HUMIDITY: FROM 40% TO 85%
8. ENVIRONMENTAL SPECIFICATIONS:  
 8.1 HUMIDITY TEST: HUMIDITY 90% TO 95% TEMPERATURE 40°C ± 2°C FOR 96 HOURS.  
 8.2 HEAT TEST: TEMPERATURE 70°C ± 2°C (HUMIDITY BELOW 50%) FOR 96 HOURS.  
 8.3 COLD TEST: TEMPERATURE -40°C ± 2°C FOR 96 HOURS.
9. SOLDERABILITY TEST: THE TERMINATION IS AT LEAST 95% COVERED BY A CONTINUOUS NEW SOLDER COATING.  
 TEST CONDITION: DIP IN MOLTEN SOLDER FOR 5 Sec. AT 245±5°C (TERMINATION SHALL BE IMMERSED IN FLUX BEFORE TEST)
10. PACKING: TAPE & REEL

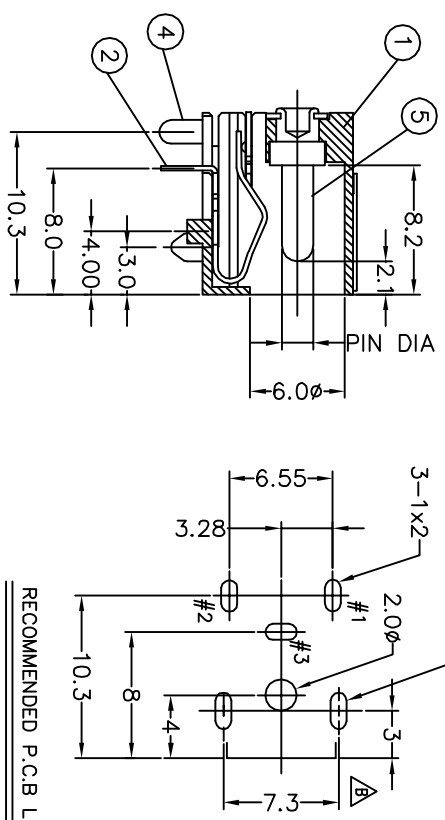

RECOMMENDED P.C.B LAYOUT  
 SOLDER SIDE  
 (TOLERANCE: ±0.05)

ORDERING CODE:

2DC-S006-11

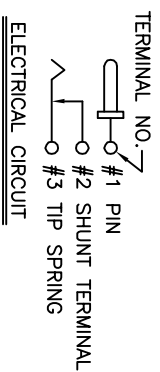

PART NO.	PIN DIA
D	2.0 <sup>+0.1</sup> <sub>0</sub>
C	2.35 <sup>+0.1</sup> <sub>0</sub>

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	NEW PRODUCT	EVEN	2003.12.25
B	ECN NO: S160817-C	YUREN	2016.10.14
C	ECN NO: S180801-01	Zhijun	2018.09.20

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
6	SHIELDING	1	BRASS STRIP 0.25t	TIN ALLOY PLATING
5	PIN	1	BRASS BAR	NICKEL PLATING
4	TERMINAL	1	BRASS STRIP 0.3t	SILVER PLATING
3	SHUNT TERMINAL	1	BRASS STRIP 0.3t	SILVER PLATING
2	TIP SPRING	1	COPPER ALLOY 0.3t	SILVER PLATING
1	BODY	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:  
 X :±0.5 X :±2°  
 X.X :±0.3 X.X :±1°  
 X.XX :±0.2 X.XX

TITLE	DC POWER JACK
DWN	Zhijun
CHKD	Sly
APVD	Lussen

PART NO. 2DC-S006-X11  
 SCALE: 4:1 UNIT: MM  
 SIZE: A3 SHEET: 1 OF 1 REV: C  
 Singatron Enterprise Co., Ltd.  
 信登企業股份有限公司

CUSTOMER COPY