

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.T110719-2A	YANG	2012.03.13
B	ECN NO:S140341	SEAN	2014.05.13

SPECIFICATIONS:

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING:DC 20 V 10 A MAX.
- 1-2.CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC FOR ONE MINUTE.
- 1-4.INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 V DC.

2.MECHANICAL CHARACTERISTICS:

- 2-1.INSERTION FORCE: 3.0 Kg MAX.
- 2-2.WITHDRAWAL FORCE: 0.3 Kg~3.0 Kg








3.LIFE TEST:5000 CYCLES MIN.

4.OTHER GENERAL SPEC. TO REFER "2DC-S060 SERIES SPEC".



5.TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

6.HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK: ●

7.HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: ●

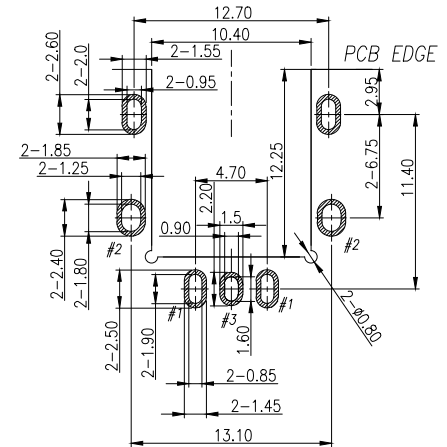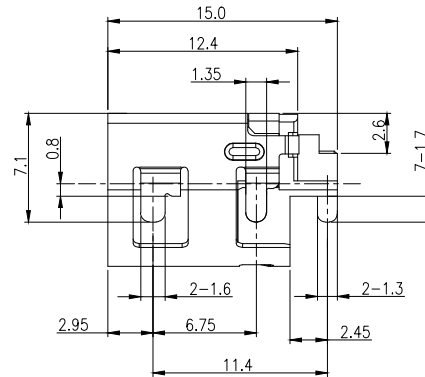

RECOMMEND PCB LAYOUT  
TOP VIEW(TOLERANCES:±0.05)

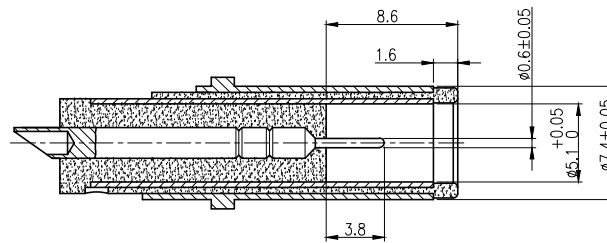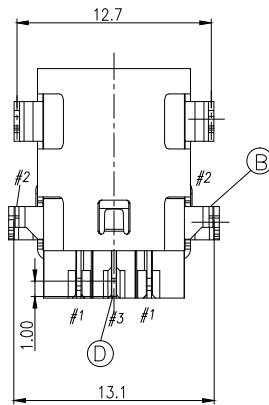

MATING PLUG  
TOLERANCE:±0.10

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	SHELL	1	COPPER ALLOY 0.35T	Ni 60u"
E	COVER	1	HIGH TEMP. THERMOPLASTIC ,UL94V-0	BLACK
D	SIGNAL	1	COPPER ALLOY 0.3T	GOLD FLASH ON CONTACT AREA
C	CONTACT	1	COPPER ALLOY 0.3T	MATTE Sn 120u"ON SOLDER TAIL
B	TIP SPRING	1	COPPER ALLOY 0.25T	ALL OVER Ni 50u"
A	BODY	1	HIGH TEMP. THERMOPLASTIC ,UL94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:  
X :±0.5 X :±2°  
X.X :±0.3 X.X :±1°  
X.XX :±0.2

Singatron Enterprise Co., Ltd.  
信音企業股份有限公司

TITLE	DC POWER JACK		
DWN	SEAN	PART NO. 2DC-S060-020F	
CHKD	CERRY	SCALE 4:1	UNIT: mm
APVD	MAX	SIZE: A3	SHEET:1 OF 1

CUSTOMER COPY