

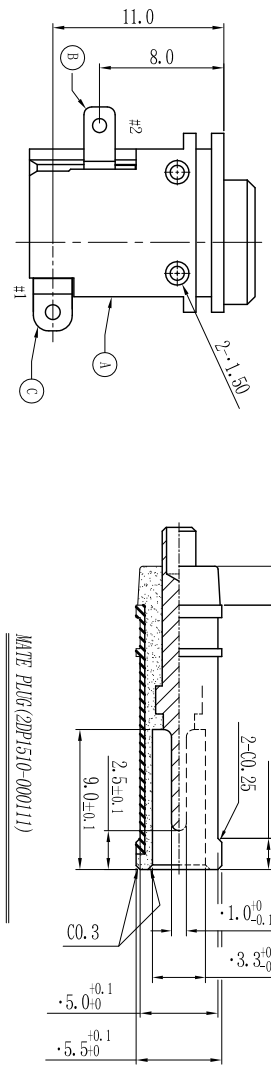
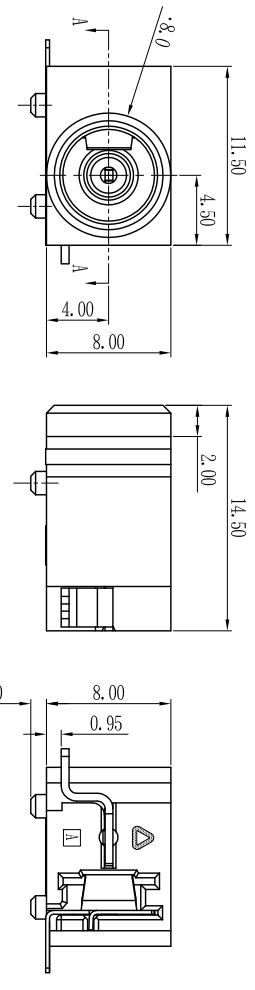


REV.	ECON OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	BILL	2010.08.25

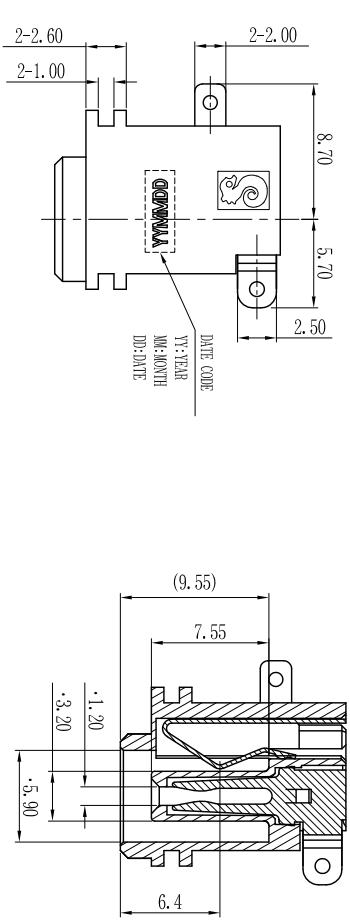

- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:**
 - RATING: 13.5V, 2A
 - CONTACT RESISTANCE: 30 MILLIOHMS Max. FOR INITIAL, 60 MILLIOHMS Max. AFTER 10,000 CYCLES.
 - INSULATION RESISTANCE: 100 MEGOHMS Min. BY 500V DC AFTER 1 MINUTE.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V RMS AFTER 1 MINUTE.
 - MECHANICAL CHARACTERISTICS:**
 - INSERTION FORCE: 0.3*3.0 KGF
 - WITHDRAWAL FORCE: 0.3*3.0 KGF
 - LIFE TEST: 10,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "20C-2000-SERIES SPEC".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION MARK ON JACK:
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - FOR HAND SOLDERING LEAD-FREE PROCESS.
 - PACKAGING: TAPE & REEL.

G.P. PASS

C	TERMINAL	1	COPPER ALLOY T=0.50mm	Ag PLATING
B	TIP	1	COPPER ALLOY T=0.25mm	Ag PLATING
A	BODY	1	HIGH TEMP THERMOPLASTIC	YELLOW COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE
X : ±0.5	X : ±2°	DC POWER JACK
X.X : ±0.3	X.X : ±1°	PART NO. 2DC2000-002121
X.XX : ±0.2		SCALE 3:1
		UNIT: mm
		SHEET: 10/1
		REV: A

CUSTOMER COPY

