

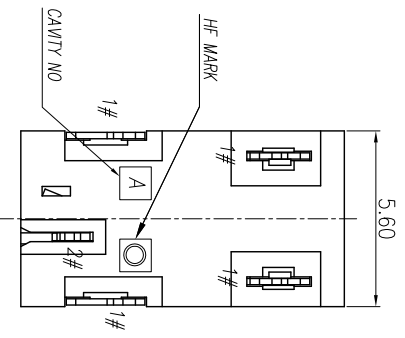
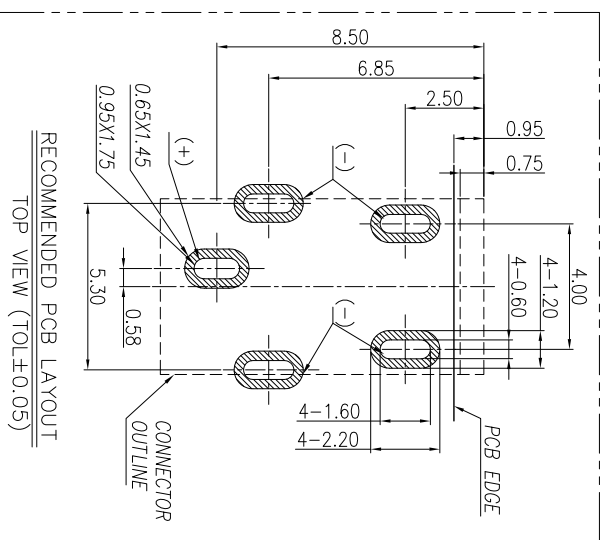


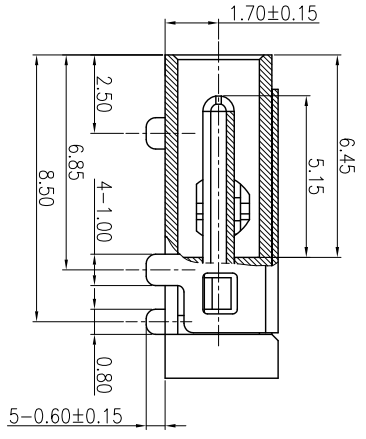

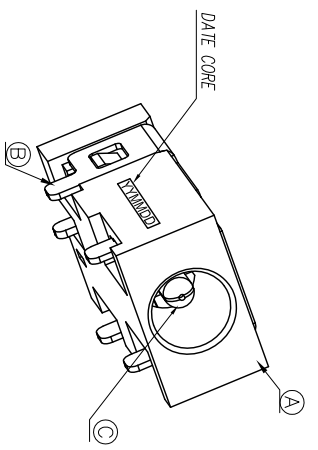


REV. ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	Hogen.HU 20120918

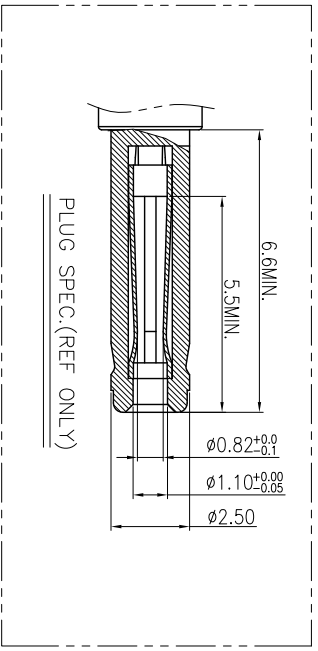

- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
- 1-1. RATING:18V/2A/DC
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE:500V R.M.S MIN;
 - 1-3. INSULATION RESISTANCE: 1000MΩ MIN.
 - 1-4. CONTACT RESISTANCE:30mΩ MAX.(INITIAL)
2. MECHANICAL CHARACTERISTICS:
- 2-1. INSERTION FORCE : 0.4~2.0 KGf
 - 2-2. WITHDRAWAL FORCE : 0.4~2.0 KGf
 - 2-3. LIFE TEST: 5,000 CYCLES MIN.
3. OTHER GENERAL SPEC. TO REFER "2DC2032 SERIES SPEC."
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
6. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
7. FOR REFLOW SOLDERING LEAD FREE PROCESS.
8. PACKAGING:TAPE&TEEL

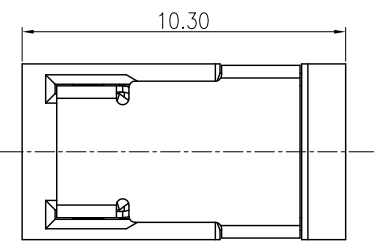

C	PN	1	COPPER ALLOY 0.25T	SILVER PLATING
B	SHELL	1	COPPER ALLOY 0.20T	SILVER PLATING
A	HOUSING	1	HIGH TEMP. THERMAL PLASTIC U94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES:

DECIMALS: ANGLES:

X : ±0.5 X : ±2°

X.X : ±0.3 X.X : ±1'

X.XX : ±0.2

TITLE: DC POWER JACK

Part No: 2DC2032-002111F

Manufacturer: Singatron Enterprise Co., Ltd. 信音企業股份有限公司

Material: HIGH TEMP. THERMAL PLASTIC U94-V0

Plating & Color: BLACK

Scale: 5:1

Unit: mm

Sheet: 10F1

Rev: A

CUSTOMER COPY