
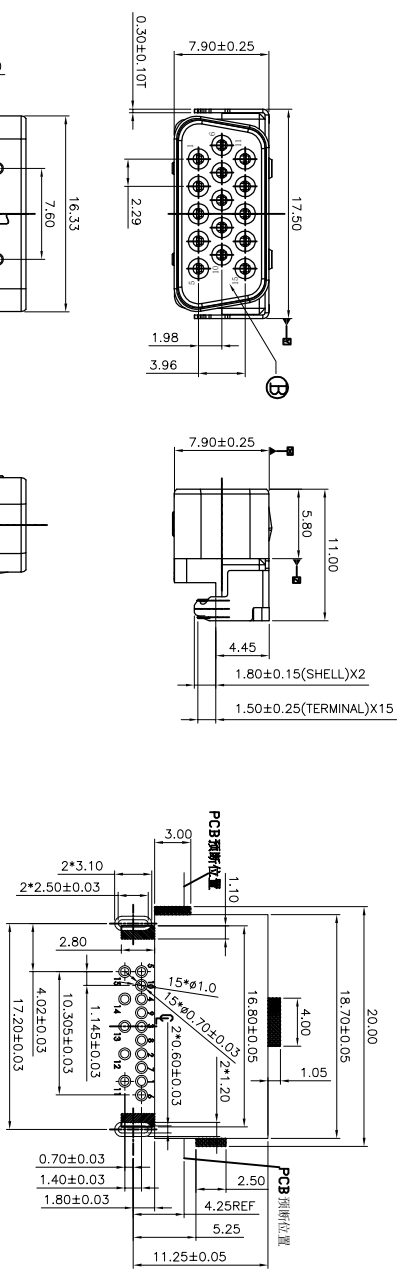
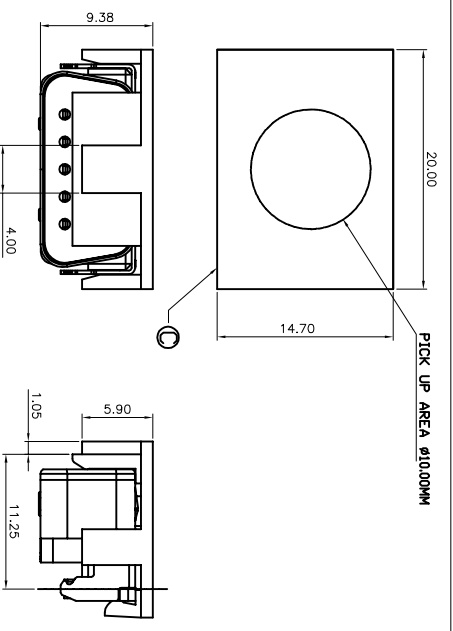

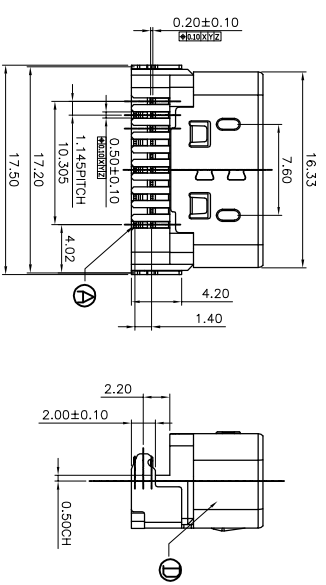


REV	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	Ye wei	2022.12.15

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT CURRENT RATING:1 AMPERE
 - CONTACT VOLTAGE RATING:240V AC.
 - CONTACT RESISTANCE:30 MILLIOHMS MAX.
 - DILECTRIC WITHSANDING VOLTAGE:500V AC RMS.
 - INSULATION RESISTANCE:5000 MEGOHMS MIN.
 - MECHANICAL CHARACTERISTICS:
 - DURABILITY:5000 CYCLES.
 - ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE:-55°C TO +105°C
 - INTERMATABLE WITH STANDARD H/D 15P MALE D-SUB
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPECIFICATION
- 6:HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING: 



RECOMMENDED PCB LAYOUT (PCB THICKNESS1.2mm)
WITHOUT LOCKING FUNCTION(反向)



ASSEMBLY CAP SCHEMATIC

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	SHELL	1	SPCC	Cu AND NICKEL 80μ" MIN. UNDER PLATED
C	CAP	1	LCP UL 94 V-0	BLACK
B	HOUSING	1	LCP UL 94 V-0	BLACK
A	CONTACT	15	C2680-H	COLD FLASH ON CONTACT AREA MATE TIN 80μ"MIN ON SOLDER AREA 50μ" MIN NICKEL ALL OVER

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X X :±2°
X.X :±0.3 X.X X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE: D-SUB SLIM 15P 反向沉板H=0.5
DWN: Ye wei PART NO.: 2DSS2Y50-000111F
CHKD: jim-deng SCALE: 1:1 UNIT: mm
APVD: jim-deng SIZE: A3 SHEET: 10F1 REV:A

CUSTOMER COPY