

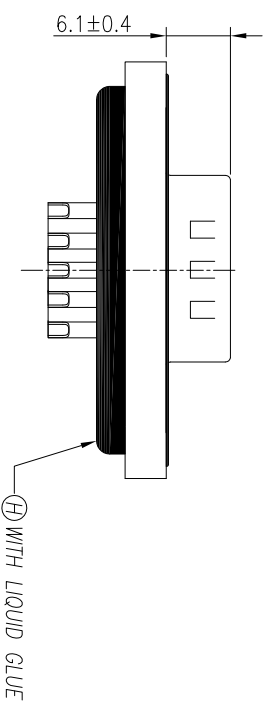

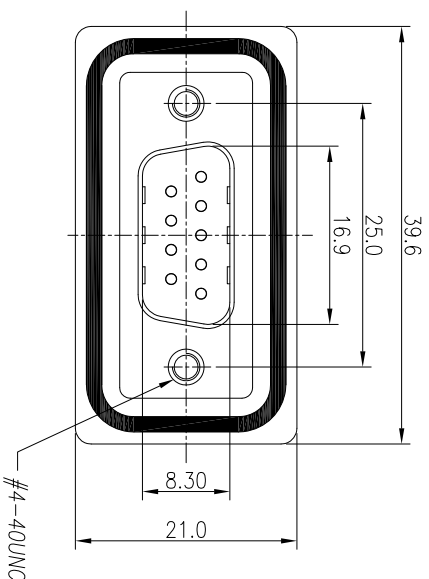
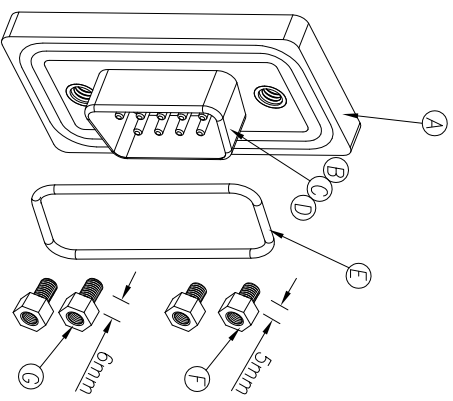


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S110330-5I		Glen	2011.03.17
B	ECN NO.:S110705-2		Shawn	2011.07.21



- NOTES:
1. WATERPROOF RATE: IP68(WHEN PROPERLY MATED) IP67: IMMERSED IN 1M WATER FOR 24 HOURS
 2. DO MATING TEST AFTER GLUED
 3. SIGNAL CONTACT CURRENT RATING: 5.0 AMPS.
 4. VOLTAGE RATING: 120V AC.
 5. DIELECTRIC WITHSTANDING VOLTAGE: AC 1000 V R.M.S
 6. INSULATION RESISTANCE: 100 MEGOHMS MINIMUM AT DC 500V.
 7. CONTACT RESISTANCE: 25 MILLIOHMS MAXIMUM.
 8. OPERATING TEMPERATURE: -40°C TO+105°C.
 9. OTHER GENERAL SPEC. TO REFER "D-SUB SERIES SPEC."
 10. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 11. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

SCREW L=5.0 FOR PANEL THICKNESS UNDER 1.2mm
 SCREW L=6.0 FOR PANEL THICKNESS BETWEEN 1.2~2.0mm



H	LIQUID GLUE	1	N/A	BLACK
G	SCREW	2	Brass	N: Plated 80u
F	SCREW	2	Brass	N: Plated 80u
E	O-RING	1	SILICONE	LIGHT BLUE
D	MALE PIN	9	Brass	GOLD PLATED
C	SHELL	2	COLD ROLLER STEEL	N: PLATED
B	INSULATOR	2	PBT	BLACK
A	D-SUB 9 PIN CORE	1	Nylon+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
 信普企業股份有限公司

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	D-SUB 9 PIN MALE CONN
DWN	Shawn
CHKD	Steve
APVD	Tony
PART NO.	2DSS3012-W09300H
SCALE:	2:1
UNIT:	mm
SHEET:	1 OF 1
REV:	B

CUSTOMER COPY