



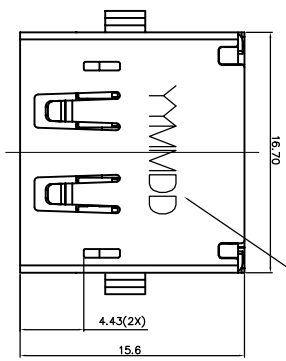



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR	RELEASE	IVY-C	2014.04.17

DATE CORR: YYMMDD
(YY=YEAR; MM=MONTH; DD=DAY)

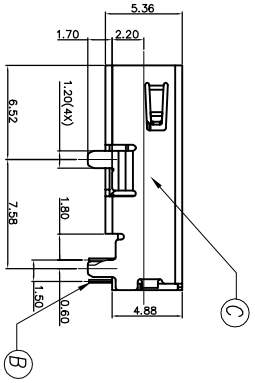



- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 0.5 AMP.
 - VOLTAGE RATING: 40V.
 - CONTACT RESISTANCE: 30mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN. @ 500V DC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 4.5Kgf MAX.
 - WITHDRAWAL FORCE: 1.0~4.0Kgf.
- LIFE TEST: 10,000 CYCLES.
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
- PACKAGE: SEE "2DT1517-320211F" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- OTHER GENERAL SPEC. TO REFER "2DT1517-320211F SPEC".

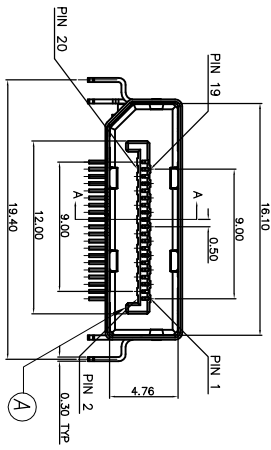

PART NO.
2DT1517-320211F

CH: 2.2mm
TERMINAL TAIL LENGTH:
2: SHELL : 1.70mm
CONTACT : 1.60mm

SUFFIX: HALOGEN FREE
PACKAGE
1: TAPE AND REEL
HOUSING COLOR
1: BLACK
CONTACT PLATING
2: GOLD FLASH PLATED ON CONTACT AREA,
MATTE TIN PLATED ON SOLDER AREA,
NICKEL UNDERPLATED OVERALL.

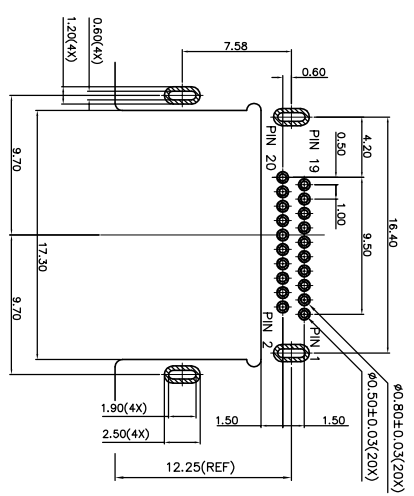

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	COVER	1	LCP+30%GF 94Y-0(E130)	BLACK
D	INK	-	INK	BLACK
C	SHELL	1	SUS304-1/2H T=0.3	NICKEL PLATED
B	CONTACT	20	C2680R-H T=0.2	SEE PART NO.
A	HOUSING	1	LCP+30%GF 94Y-0(E130)	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°
X.X : ±0.3 X.X : ±1°
X.XX : ±0.2

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	DISPLAY PORT RECEPTACLE,SINKING, CH=2.2mm
DWN	HW-C-20140417 PART NO. 2DT1517-320211F
CHKD	SCALE: 3.3 / UNIT: mm
APVD	ANGEL/20140417 SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY