


DATE CODE: YYMMDD  
(YY=YEAR; MM=MONTH; DD=DAY)

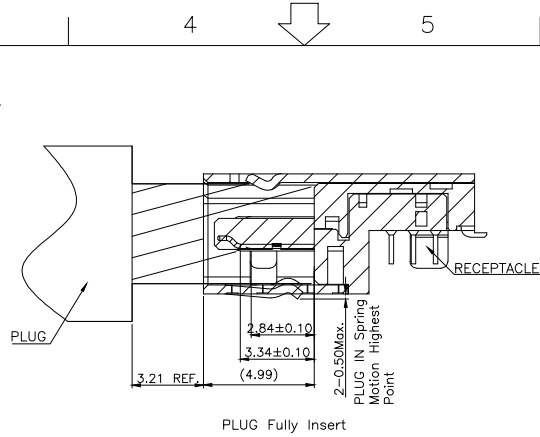

PLUG Fully Insert





SPECIFICATIONS:

1. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
2. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
3. PACKAGE: SEE "2DT1533-100111F" PACKAGE.
4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
5. OTHER GENERAL SPEC. TO REFER "2DT1533-100111F SPEC".





PART NO.  
2DT1533-100111F

- SUFFIX: HALOGEN FREE
- PACKAGE: 1: TAPE AND REEL
- HOUSING COLOR: 1: BLACK
- CONTACT PLATING: 1: GOLD FLASH(1~3u") ON CONTACT AREA, 60u" MIN. MATTE TIN PLATED ON SOLDER AREA, 40u" MIN. NICKEL UNDERPLATE OVER ALL.

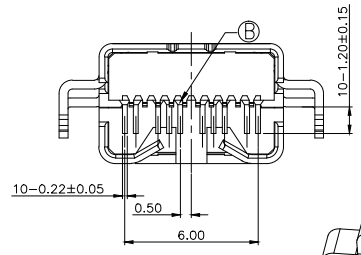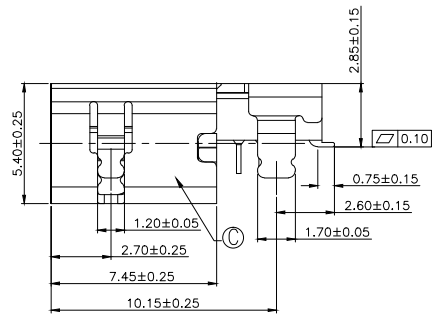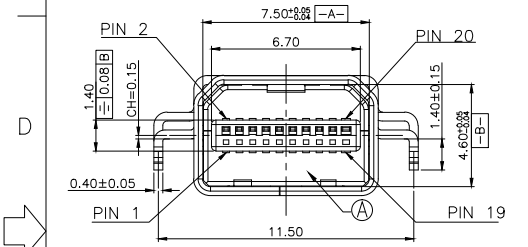

PIN	SIGNAL TYPE	PIN NAME
1	GND	GND
2	In	Hot Plug Detect
3	Out	ML_Lane 0 (p)
4	CONFIG (see note 1)	CONFIG1
5	Out	ML_Lane 0 (n)
6	CONFIG (see note 1)	CONFIG2
7	GND	GND
8	GND	GND
9	Out	ML_Lane 1 (p)
10	Out	ML_Lane 3 (p)
11	Out	ML_Lane 1 (n)
12	Out	ML_Lane 3 (n)
13	GND	GND
14	GND	GND
15	Out	ML_Lane 2 (p)
16	I/O	AUX CH (p)
17	Out	ML_Lane 2 (n)
18	I/O	AUX CH (n)
19	GND	GND
20	PWR Out (see note 2)	DP_PWR

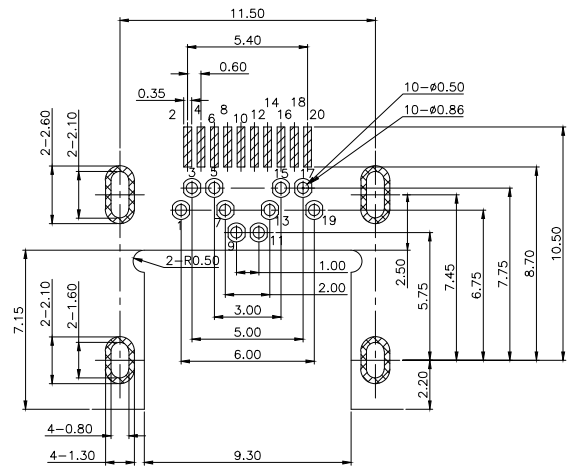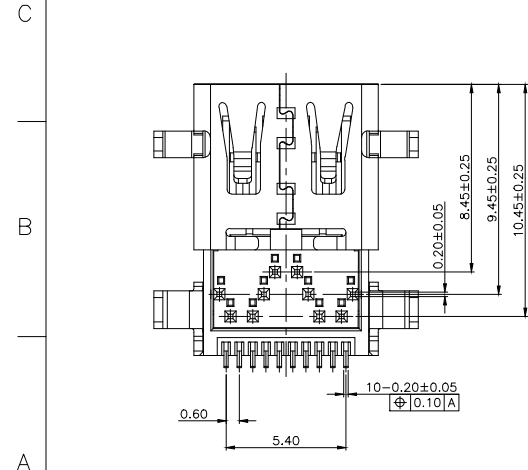

RECOMMENDED PCB LAYOUT(TOP VIEW)  
(THICKNESS=1.60±0.05mm)  
(TOLERANCE=±0.05mm)

C SHELL	1	SUS304	50u" MIN. NICKEL
B CONTACT	20	C2680	SEE PART NO.
A HOUSING	1	LCP UL 94V-0	BLACK
NO DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		信音科技(香港)有限公司	
DECIMALS:	ANGLES:	TITLE: MINI DISPLAYPORT RECEPTACLE CONNECTOR	
X :±0.5	X :±2°	DWN	EVEN 2021.11.05 PART NO. 2DT1533-100111F
X.X :±0.3	X.X :±1°	CHKD	SCALE:1/1 UNIT: mm
X.XX :±0.2		APVD	ANGELA2021.11.05 SIZE: A3 SHEET:1 OF 1 REV:A
CUSTOMER COPY			