

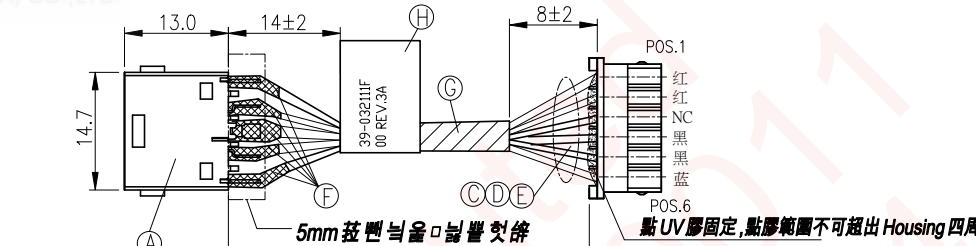







REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR No.: T160223-9A	Springwu	2016.07.15



DC POWER JACK	WIRE COLOR	CONNECTOR
PIN A3	BLUE(UL10368 26AWG)	POS.6
PIN A1	BLACK(UL10368 26AWG)	POS.5
PIN A2	BLACK(UL10368 26AWG)	POS.4
	空 (不接線)	POS.3
PIN A4	RED(UL10368 26AWG)	POS.2
PIN A5	RED(UL10368 26AWG)	POS.1

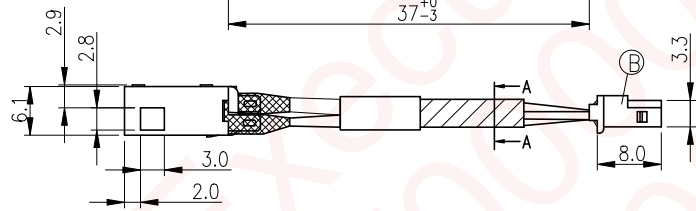

焊接方式&勾焊方向示意图

MATING STATUS

SPECIFICATIONS:

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING:20V 3.25A;
- 1-2.CONTACT RESISTANCE:30mΩ MAX.(INITIAL) (ONLY FOR DC JACK)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.
- 1-4.INSULATION RESISTANCE:100MΩ MIN. MEASURED BY 500V DC.

2.MECHANICAL CHARACTERISTICS:

- 2-1.INSERTION FORCE:3.0KGF MAX
- 2-2.WITHDRAWAL FORCE:0.7KGF MIN

3.LIFE TEST:5000 CYCLES MIN.

4.OTHER GENERAL SPEC. TO REFER "2DW1539-032111F SPEC".

5.HALOGEN

FREE

PANEL ID MUST BE GREATER THAN THE PLUG'S OD WHICH MUST IDENTIFICATION CONFERENCE OF LESS THAN OR EQUAL TO 0.5 mm.(AS SHOWN MARK IN FIGURE 1.)

ON

JACK:

6.HALOGEN

FREE


PRODUCT

IDENTIFICATION

LABEL

ON

PACKAGING:



H	LABEL	1	28*10	WHITE
G	ACETATE CLOTH TAPE	1	W15*0.12	BLACK
F	HEAT SHRINK TUBE	5	POLYOLEFIN φ2.5(125°,300V)	BLACK
E	WIRE	1	UL10368 26AWG	BLUE
D	WIRE	2	UL10368 26AWG	BLACK
C	WIRE	2	UL10368 26AWG	RED
B	CONNECTOR(TYU)	5	TER-PHOSPHOR BRONZE(TYU TU3002TP0-A)	TIN-PLATED
A	DC POWER JACK(DRAPHO)	1	P/N:PJCS0056-1002H-C(2DC1539-000111F)	MILKY YELLOW
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS: ANGLES:		TITLE DC POWER JACK + WIRE		
X	:±0.5 X :±2°	DWN	Springwu	PART NO. 2DW1539-032111F
X.X	:±0.3 X.X :±1°	CHKD	Sky	SCALE:-- UNIT: mm
X.XX	:±0.2	APVD	Lussen	SIZE: A3 SHEET: 1 OF 1 REV:A
CUSTOMER COPY				