

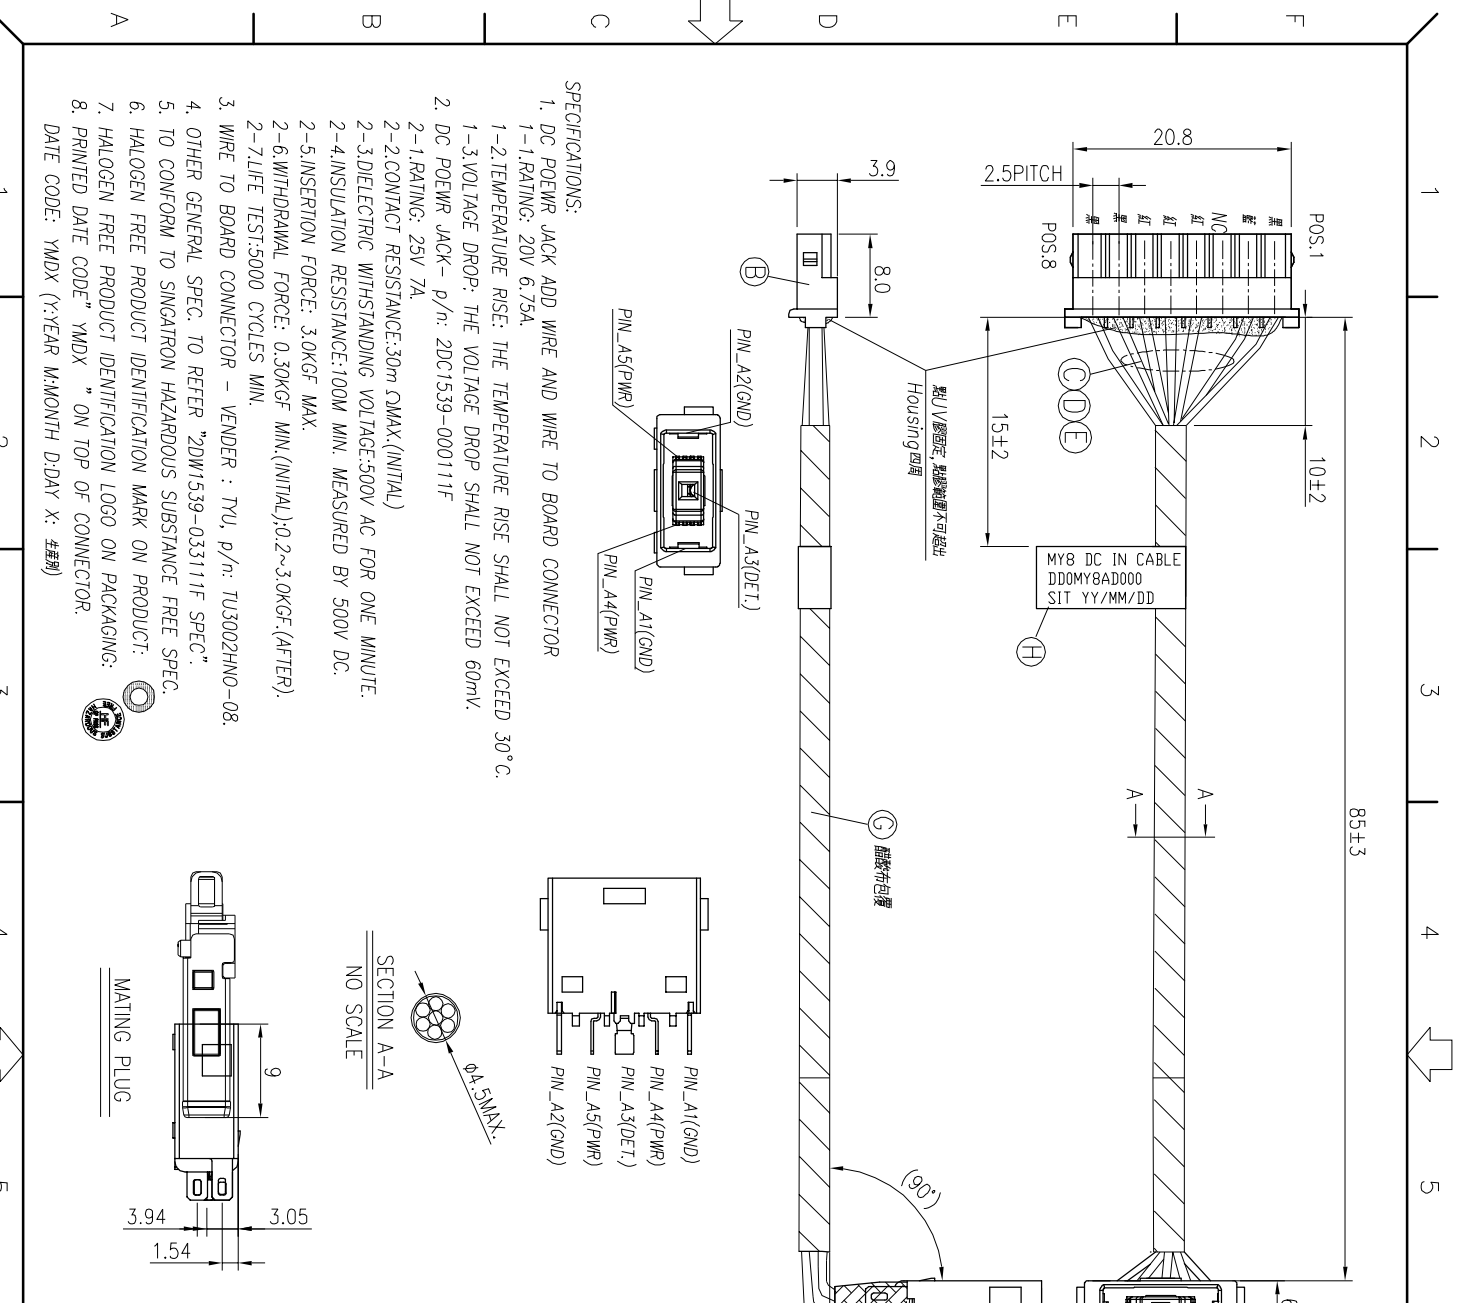
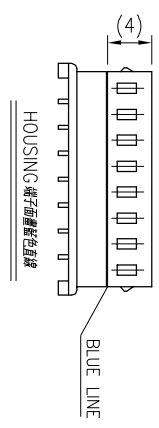
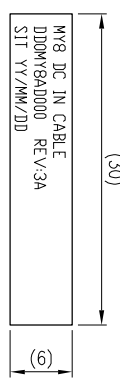
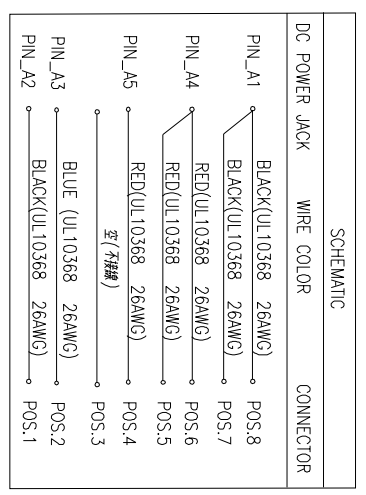
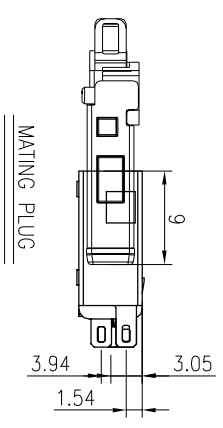


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR.T160411-5A		Springwul	2016.11.07



SPECIFICATIONS:

- DC POWWR JACK ADD WIRE AND WIRE TO BOARD CONNECTOR
 - 1-1.RATING: 20V 6.75A
 - 1-2.TEMPERATURE RISE: THE TEMPERATURE RISE SHALL NOT EXCEED 30°C.
 - 1-3.VOLTAGE DROP: THE VOLTAGE DROP SHALL NOT EXCEED 60mV.
- DC POWWR JACK - p/n: 2DC1539-000111F
 - 2-1.RATING: 25V 7A
 - 2-2.CONTACT RESISTANCE:30m ΩMAX.(INITIAL)
 - 2-3.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.
 - 2-4.INSULATION RESISTANCE:100M MIN. MEASURED BY 500V DC.
 - 2-5.INSERTION FORCE: 3.0KGF MAX.
 - 2-6.WITHDRAWAL FORCE: 0.30KGF MIN.(INITIAL);0.2~3.0KGF.(AFTER).
 - 2-7.LIFE TEST:5000 CYCLES MIN.
- WIRE TO BOARD CONNECTOR - VENDER : TYU, p/n: TU3002HNO-08.
- OTHER GENERAL SPEC. TO REFER "2DW1539-033111F SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
- HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
- PRINTED DATE CODE" YMDX " ON TOP OF CONNECTOR.
- DATE CODE: YMDX (Y:YEAR M:MONTH D:DAY X: 生差別)



NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	DC POWER JACK(DRAPH0)	1	P/N:PUCS0056-1002H-C (2DC1539-000111F)	
B	CONNECTOR(TYU)	7	HSGWTCN UL94V-0(TU3002HNO-08)	MILKY YELLOW
C	WIRE	3	UL10368 26AWG	BLACK
D	WIRE	3	UL10368 26AWG	BLUE
E	WIRE	1	UL10368 26AWG	BLACK
F	HEAT SHRINK TUBE	5	POLYOLEFIN φ2.5&φ2.0(125-300μ)	BLACK
G	ACETATE CLOTH TAPE	2	T0-12	WHITE
H	LABEL	1	L30*W6	WHITE

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	DC POWER JACK + WIRE
DWN	Springwul
CHKD	Sky
APVD	Lussen
PART NO.	2DW1539-033111F
SCALE:	--
UNIT:	mm
SIZE:	A3
SHEET:	1 OF 1
REV:	A