
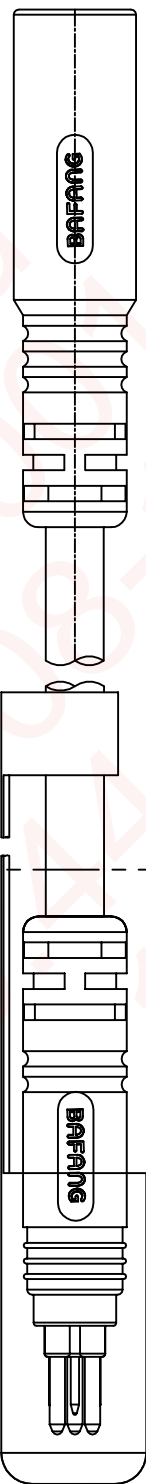


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S131017-13C	Harlen		2013.11.4
B	ECN NO.: S151212-C	Vicky		2016.03.16
C	ECN NO.: S160801-R	Yang		2016.08.01


1200110

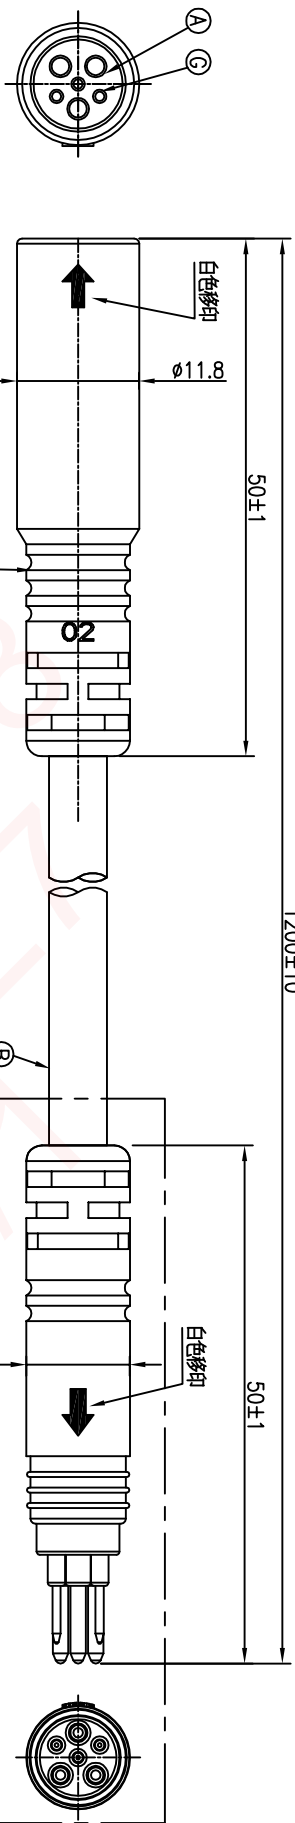

6	BLACK	6
5 <td>YELLOW</td> <td>5</td>	YELLOW	5
4 <td>WHITE</td> <td>4</td>	WHITE	4
3 <td>BLUE</td> <td>3</td>	BLUE	3
2 <td>RED</td> <td>2</td>	RED	2
1 <td>GREEN</td> <td>1</td>	GREEN	1

CONN.1 WIRE COLOR

CONN.1	CONN.2
PIN OUT	

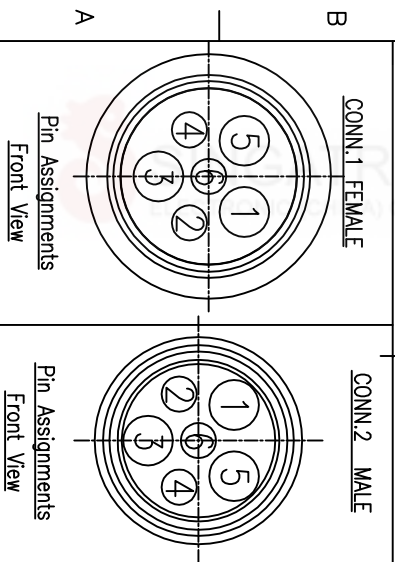

NOTES:

1. WATERPROOF RATE: IP65
2. CURRENT RATING: 10A
3. CONTACT RESISTANCE: 3 Ohm Max
4. HI-POT TEST 800V AC, 5mA(1SEC)
5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS."
7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	FEMALE PIN	6	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
F	SHRINK TUBE	3	φ1.5mm 300V	BLACK
E	SHRINK TUBE	3	φ2.5mm 600V	BLACK
D	INNER MOLD	1	PVC	BLACK
C	OVER MOLD	1	HYTREL	BLACK
B	CABLE	1	16#*3C+24#*3C φ6.2 WITH CONN. 客供件	BLACK
A	BODY	1	PA66+GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE: E-BIKE SERIES 180° 6 PIN CONN.

DWN: Yang PART NO. 2EB3004-W06918H

CHKD: JF SCALE 2:1 UNIT: mm

APVD: Harlen SIZE: A3 SHEET: 1 OF 1 REV: C

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司

CUSTOMER COPY