

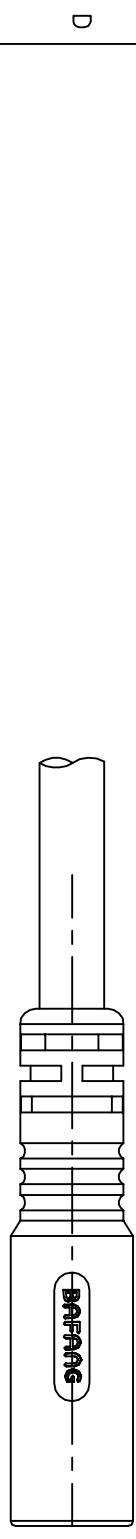



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S170622-2A	Wcky	2017.06.23

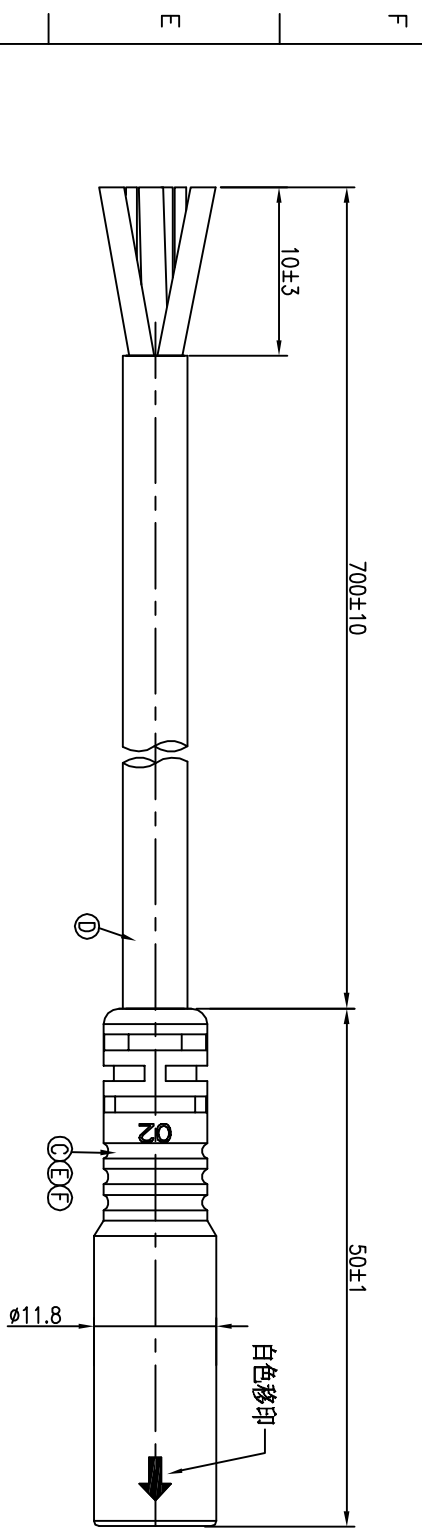

A VIEW

6	BLACK
5	YELLOW
4	WHITE
3	BLUE
2	RED
1	GREEN
CONN. WIRE COLOR	
PIN OUT	
CONN.	

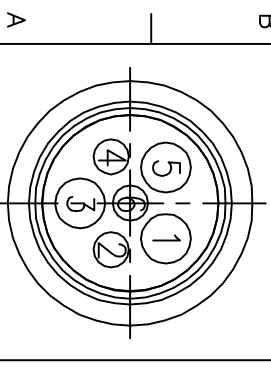

Pin Assignments  
Front View

- NOTES:
1. WATERPROOF RATE: IP65
  2. CURRENT RATING: 10A+2A
  3. CONTACT RESISTANCE: 3 Ohm Max.
  4. HI-POT TEST 800V AC, 5mA(1SEC)
  5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
  6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS"
  7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

F	SHRINK TUBE	3	φ1.5mm 300V	BLACK
E	INNER MOLD	1	PVC	NATURAL
D	CABLE	1	16#*3C+24#*3C OD6.2	BLACK(PVC JACKET)
C	OVER MOLD	1	HYTREL	BLACK
B	FEMALE PIN	6	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF	BLACK
UNLESS OTHERWISE SPECIFIED TOLERANCES		QTY	MATERIAL	PLATING & COLOR
TITLE		Singatron Enterprise Co., Ltd. 信亨企業股份有限公司		
DECIMALS:		ANGLES:		
X.XX :±0.05		X.XX :±2°		
X.XX :±0.3		X.XX :±1°		
X.XX :±0.2				
TITLE		E-BIKE SERIES 180° 6 PIN FEMALE CONN.		
DWG		Vcky		
CHKD		Harlen		
APVD		Steve		
PART NO.		28B3004-W08962H		
SCALE		2:1		
UNIT		mm		
SIZE		A3		
SHEET		1 OF 1		
REV		A		

CUSTOMER COPY