

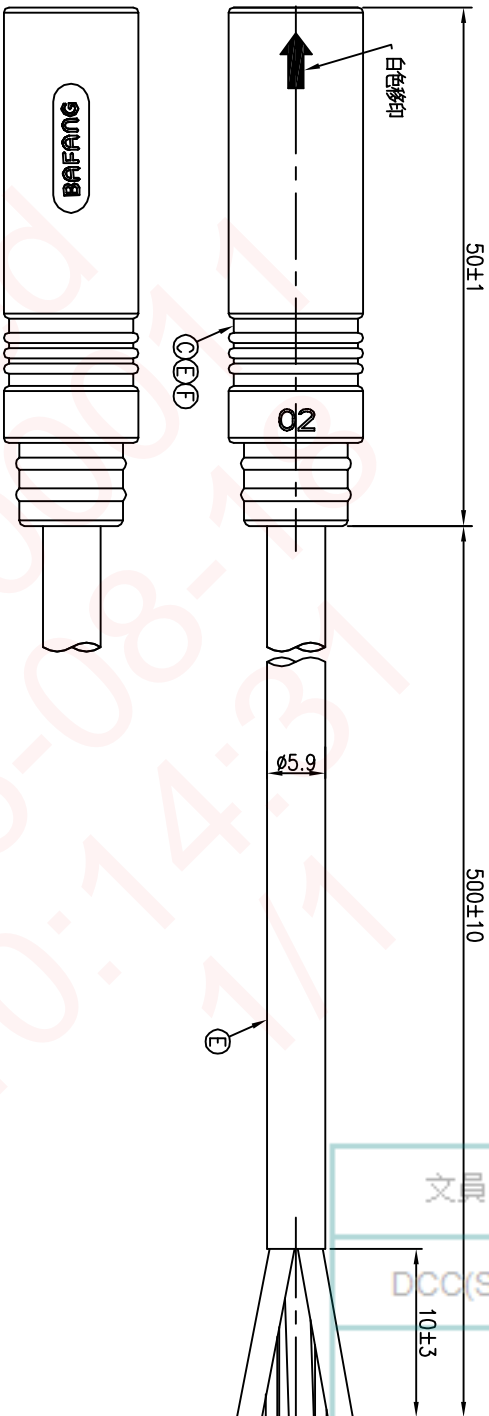



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140425-2A		Vicky	2014.05.29
B	ECN NO.:S151212-C		Vicky	2016.03.17
C	ECN NO.:S160801-R		Vicky	2016.08.01

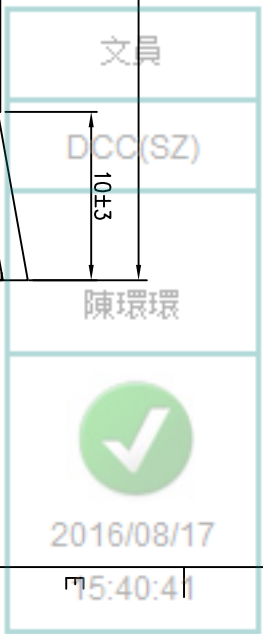

9	BLACK
8	RED
7	BLUE
6	YELLOW
5	GREEN
4	WHITE
3	GREEN(16#)
2	BLUE(16#)
1	YELLOW(16#)
CONN.1 WIRE COLOR	
PIN OUT	



Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP65
2. CURRENT RATING: 10A+5A
3. CONTACT RESISTANCE: 3 Ohm Max.
4. HI-POT TEST 800V AC, 5mA(1SEC)
5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS".
7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

F	SHRINK TUBE	6	Ø1.5mm 300V	BLACK
E	INNER MOLD	1	PVC	NATURAL
D	CABLE	1	16#*3C+24#*6C OD5.9	BLACK(PVC JACKET)
C	OVER MOLD	1	HYTREL	BLACK
B	FEMALE PIN	9	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:	TITLE		
X :±0.5	X :±2°	E-BIKE SERIES 180° 9 PIN CONN.		
X.X :±0.3	X.X :±1°	DWN	Vicky	PART NO.2BB3004-W09708H
X.XX :±0.2		CHKD	Horlen	SCALE 2:1 UNIT: mm
		APVD	Steve	SIZE: A3 SHEET:1 OF 1 REV: C
CUSTOMER COPY				



Singatron Enterprise Co., Ltd.
信音企業股份有限公司