

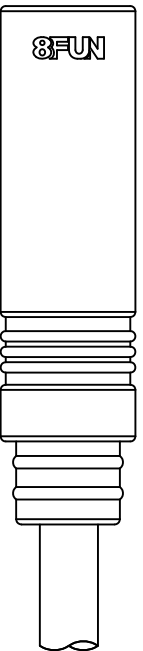


REV.	ECN NO.	OR DESCRIPTION	REVISION	DATE
A	PDR NO.:S130822-3A		Harden	2014.2.11
B	PDR NO.:S140401-3A		Vicky	2014.04.23
C	PDR NO.:S140429-2A		Vicky	2014.05.29

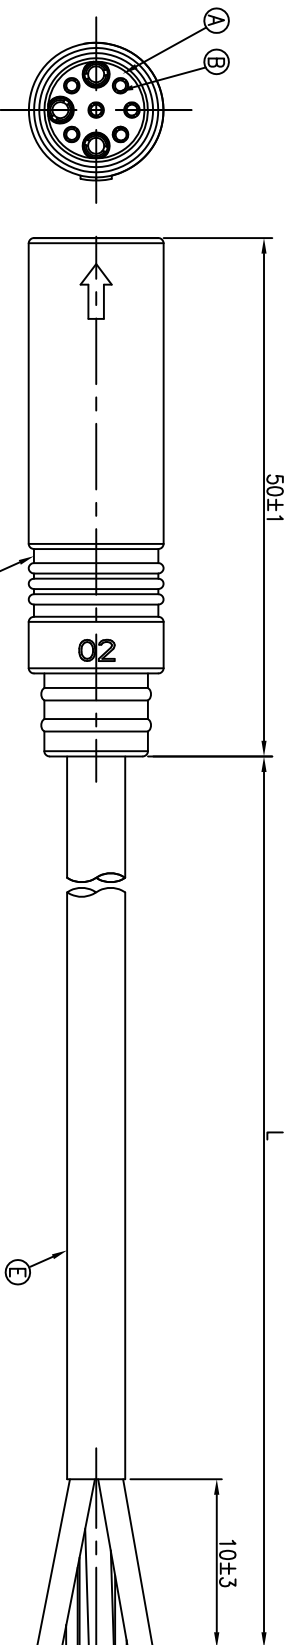

CONN.1	WIRE COLOR	PIN OUT	P/N	L
1	YELLOW(16#)	2EB3004-W09702H	500±10	
2	BLUE(16#)	2EB3004-W09702H	1000±10	
3	GREEN(16#)	2EB3004-W09703H	1500±10	
4	WHITE	2EB3004-W09704H	2000±10	
5	GREEN	2EB3004-W09705H	600±10	
6	YELLOW	2EB3004-W09706H	1350±10	
7	BLUE	2EB3004-W09709H	300±10	
8	RED			
9	BLACK			



Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP65
2. CURRENT RATING: 10A+5A
3. CONTACT RESISTANCE: 3 Ohm Max.
4. HI-POT TEST 800V AC, 5mA(1SEC)
5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS".
7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	SHRINK TUBE	6	φ1.5mm 300V	BLACK
E	INNER MOLD	1	PVC	NATURAL
D	CABLE	1	16#*3C+24#*6C OD6.6	BLACK(PVC JACKET)
C	OVER MOLD	1	HYTREL	BLACK
B	FEMALE PIN	9	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
 X :±0.5 X :±2
 X.X :±0.3 X.X :±1'
 X.XX :±0.2

TITLE	Singatron Enterprise Co., Ltd. 信譽企業股份有限公司			
DWN	Vicky	PART NO.2EB3004-W09702H		
CHKD	Harden	SCALE 2:1	UNIT: mm	
APVD	Quan	SIZE: A3	SHEET: 1 OF 1	REV: C

CUSTOMER COPY