

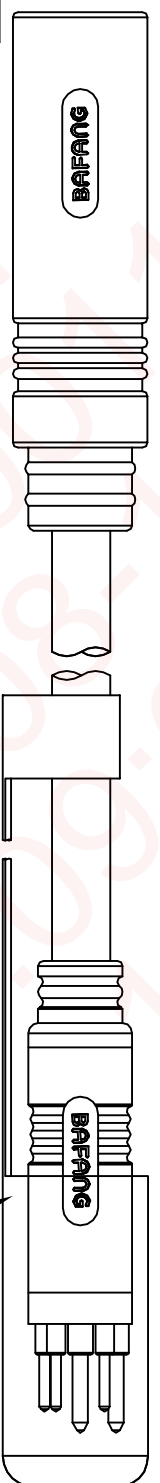


1	2	3	4	5	6	7	8	
REV/ECN NO OR DESCRIPTION							REVISED	DATE
A	PDR NO.:S150416-4A						Blues	2015.04.09
B	ECN NO.:S151212-C						Vicky	2016.03.17
C	ECN NO.:S160801-R						Vicky	2016.08.01

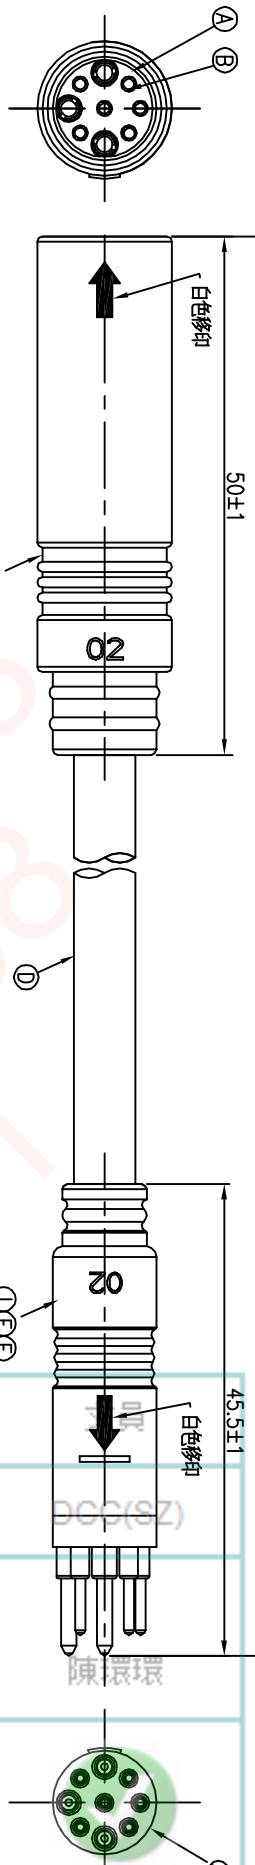

9	BLACK	9
8	RED	8
7	BLUE	7
6	YELLOW	6
5	GREEN	5
4	WHITE	4
3	GREEN(16#)	3
2	BLUE(16#)	2
1	YELLOW(16#)	1
CONN.1	WIRE COLOR	CONN.2
	PIN OUT	

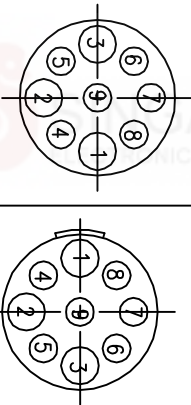

Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP65
2. CURRENT RATING: 10A+5A
3. CONTACT RESISTANCE: 3 Ohm Max.
4. HI-POT TEST 800V AC, 5mA(1SEC)
5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS".
7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

1	OVER MOLD	1	TPU	BLACK
H	CAP	1	NYLON	WHITE
G	MALE PIN	9	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
F	SHRINK TUBE	12	Ø1.5mm 300V	BLACK
E	INNER MOLD	2	PVC	BLACK
D	CABLE	1	16#*3C+24#*6C 0D5.8	BLACK(PVC JACKET)
C	OVER MOLD	1	HYTREL	BLACK
B	FEMALE PIN	9	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	2	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:	TITLE	E-BIKE SERIES 180° 9 PIN CONN.
X :±0.5	X :±2°	DWN	Vicky
X.X :±0.3	X.X :±1°	CHD	Horlen
X.XX :±0.2		APVD	Steve

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

PART NO.2BB3004-W09722H

SCALE 2:1 UNIT: mm

SIZE: A3 SHEET:1 OF 1 REV: C

CUSTOMER COPY