

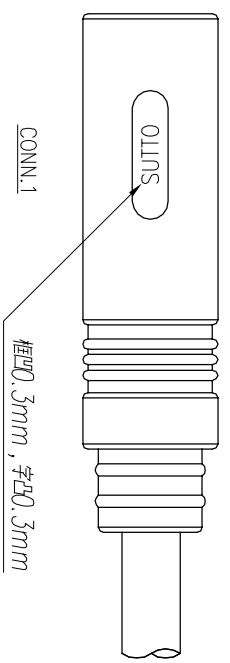


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A211115-2A		LEI	2022.01.14

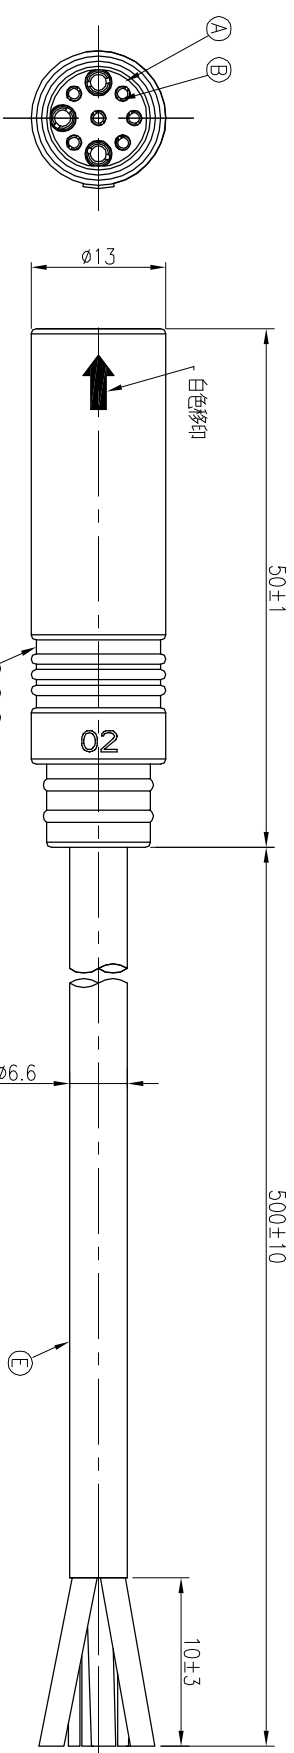

9	BLACK
8	RED
7	BLUE
6	YELLOW
5	GREEN
4	WHITE
3	GREEN(1.5mm ²)
2	BLUE(1.5mm ²)
1	YELLOW(1.5mm ²)
CONN.1 WIRE COLOR	
PIN OUT	
CONN.1	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP65
 2. CURRENT RATING: POWER PIN 10A
SIGNAL PIN 5A
 3. CONTACT RESISTANCE: 3 Ohm Max.
 4. HI-POT TEST 800V AC, 5mA(1SEC)
 5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
 6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS".
 7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

F	HEAT SHRINK TUBE	6	Ø1.6mm 金	BLACK
E	INNER MOLD	1	PVC	NATURAL
D	CABLE	1	3C*1.5mm ² +6C*0.2mm ² OD6.6mm	BLACK(PVC JACKET)
C	OVER MOLD	1	TPU	BLACK
B	FEMALE PIN	9	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
蘇州信普汽車電子有限公司				
TITLE E-BIKE SERIES 180° 9 PIN CONN.				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
DWN	LEI	PART NO.2EB3004-W097CGH	UNIT: mm	
CHKD	JF	SCALE 2:1		
APVD	JF	SIZE: A3	SHEET: 1 OF 1	REV: A
CUSTOMER COPY				