


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR	NO.:J200120-3A	JY	2021.05.29

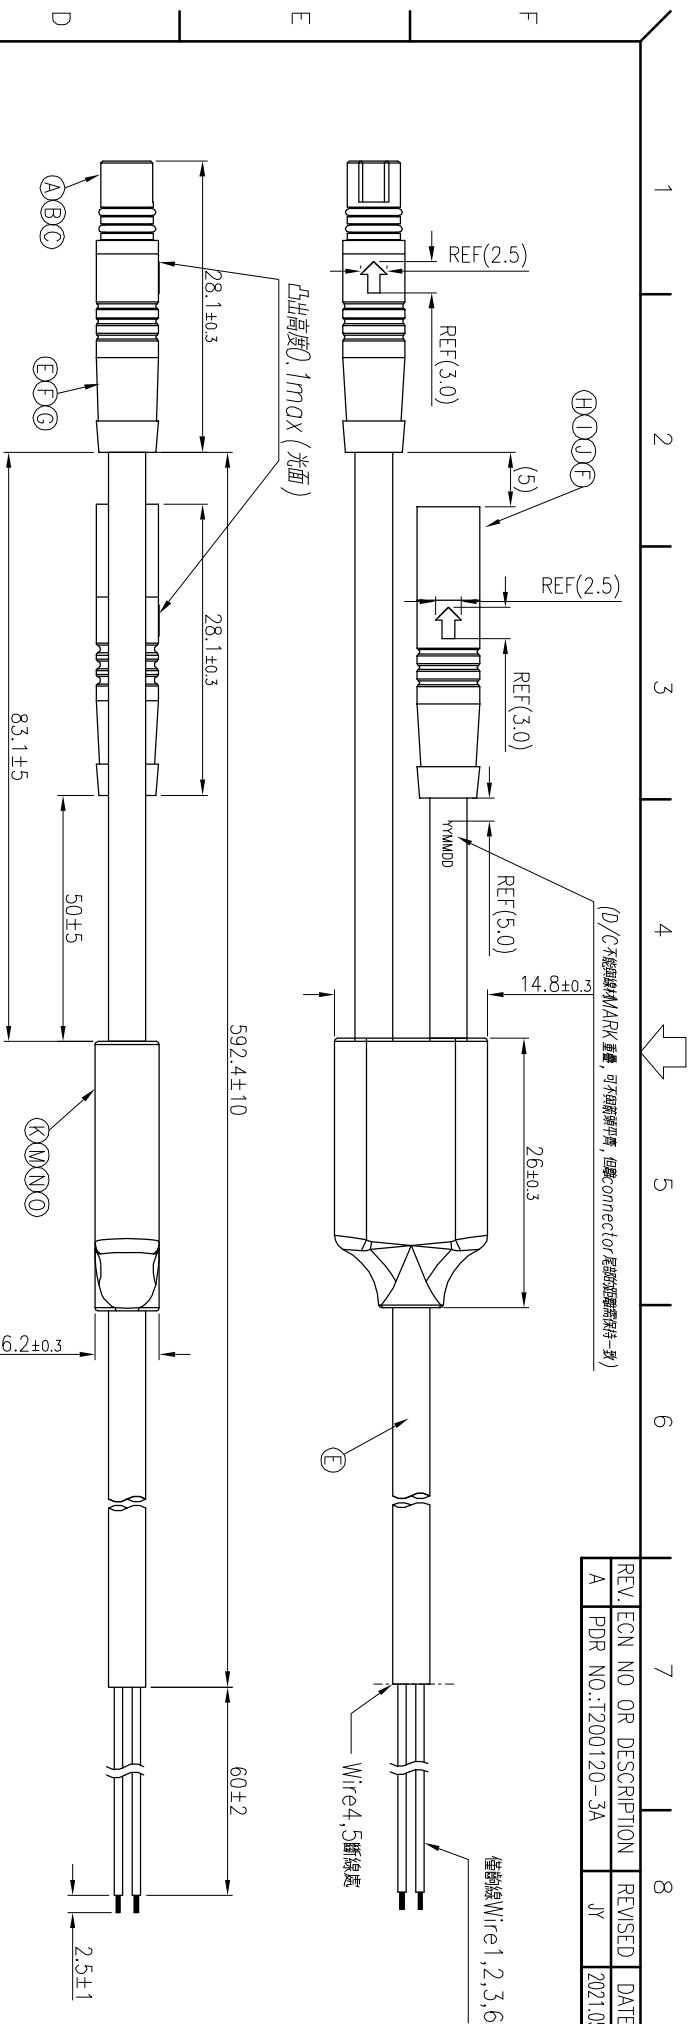


6	GREEN	6
5	YELLOW	5
4	ORANGE	4
3	RED	3
2	BROWN	2
1	BLACK	1
PIN NO.	WIRE COLOR	PIN NO.

P/N	FLK P/N	FLK MODEL
2EB3016-W06103H	832B-0092-0180	EVO MY21

PIN OUT	
---------	--

2EB3016-W06101H	2EB3030-W06101H
-----------------	-----------------

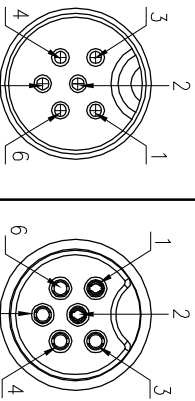

Pin Assignments
Front View

Pin Assignments
Front View

NOTES:

- CURRENT RATING: 1A
- CONTACT RESISTANCE: 3 Ohm Max.
- WITHSTAND VOLTAGE: 500V AC,1MIN.
- INSULATION RESISTANCE: 100Mohm MIN. BY 500V DC
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **RoHS Pass**

O	PCB	1	FR4	GREEN
N	GLUE	1	通康 1-2577	NATURE
M	SR OVER MOLD	1	THERMOPLASTIC	BLACK
K	SR INNER MOLD	1	THERMOPLASTIC	NATURE
J	BODY	1	THERMOPLASTIC	BLACK
I	MALE PIN	6	C3604	1~3u" GOLD PLATING OVER Ni PLATING
H	HOUSING	1	C3604	Ni PLATING
G	OVER MOLD	2	THERMOPLASTIC	BLACK
F	GLUE	2	NA	BLACK
E	HEAT SHRINK TUBE	2	300V	BLACK
D	CABLE	1	26AWG*6C,300V	BLACK
C	O-RING	2	SILICONE	RED
B	FEMALE PIN	6	C5210-EH	1~3u" GOLD PLATING OVER Ni PLATING
A	HOUSING	1	THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Suzhou Singatron Auto Electronics CO.,LTD.
蘇州信音汽車電子有限公司

DECIMALS:	ANGLES:	TITLE	MMI 6PIN WIRE CABLE ASSY
X :±0.5	X :±2°	DWN	JY
X.X :±0.3	X.X :±1°	CHKD	JF
X.XX :±0.2		APVD	JF

CUSTOMER COPY