





REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S110711-2A	Shown	2011.11.14

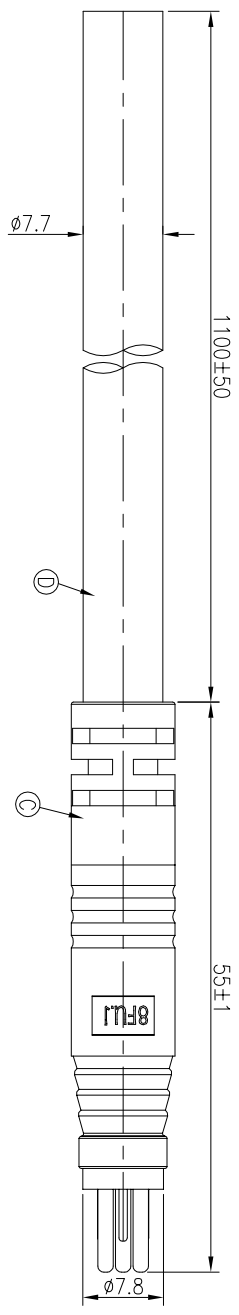

A VIEW

6	BLACK
5	YELLOW
4	WHITE
3	BLUE
2	RED
1	GREEN
CONN. WIRE COLOR	
PIN OUT	
CONN.	



Pin Assignments  
Front View

- NOTES:
1. WATERPROOF RATE: IP66
  2. CURRENT RATING: 10A+2A
  3. CONTACT RESISTANCE: 3 Ohm Max.
  4. HI-POT TEST 800V AC, 5mA(1SEC)
  5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC.
  6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS".
  7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PASS**

D	CABLE	1	UL2464 16#*3C+ (24#*3C+AL TWIST) LV OD=7.7	BLACK(PVC90P JACKET)
C	OVER MOLD	1	HYTREL	BLACK
B	MALE PIN	6	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY DESCRIPTION	1	PPE	BLACK PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: E-BIKE SERIES 180° 6 PIN MALE CONN.				
SINGATRON ENTERPRISE CO., LTD. 信音企業股份有限公司				
DWN: Shown PART NO. 2EB3024-W06901H				
CHKD: Harden SCALE 2:1 UNIT: mm				
APVD: Tony SIZE: A3 SHEET: 1 OF 1 REV: A				
CUSTOMER COPY				