


REV.	ECN.NO	REVISIONS	REV.DRAWN	DATE
T	----	增加电镀膜厚范围上限	zuochao	2013/05/02
U	----	修正视图	sunquan	2015/06/30
V	----	缩小耳扣, 变更为带P料号规格	sunquan	2015/06/30

SPECIFICATION
 . Voltage Rating : 50V AC/DC
 . Current Rating : 0.5A AC/DC
 . Withstanding Voltage : 500V AC/Minute
 . Insulation Resistance : 100M Ω Min.
 . Temperature Range : -40°C~+85°C
 . Contact Resistance : 20m Ω Max.

NOTES:
 1. Material: Base&Cover: High Temp Thermoplastic, UL94V-0
 Contact: Copper Alloy; Ear: Copper Alloy
 2. Color: Base: Nature; Cover: Black
 3. Q'ty : 2,000 Pcs/Reel.
 4. Part No. 2FF1191PSDR-XXXXXX-XX-X
 BLANK: Paper plate
 S: plastic plate
 Blank: Normal
 NH: Halogen free
 (M):Matte Tin(Sn>100u",Ni>30u")
 Blank: Without MYLAR
 G:Gold Plated(3u">Au>0.8u",Ni>30u")
 ML: WITH MYLAR
 5.Halogen free product identification LOGO on the packing

Poles	Dimensions(mm)					Poles	Dimensions(mm)				
	A	B	C	D	E		A	B	C	D	E
04	1.50	5.40	5.40	2.60	2.50	33	16.00	19.90	19.90	17.10	17.00
05	2.00	5.90	5.90	3.10	3.00	34	16.50	20.40	20.40	17.60	17.50
06	2.50	6.40	6.40	3.60	3.50	35	17.00	20.90	20.90	18.10	18.00
07	3.00	6.90	6.90	4.10	4.00	36	17.50	21.40	21.40	18.60	18.50
08	3.50	7.40	7.40	4.60	4.50	37	18.00	21.90	21.90	19.10	19.00
09	4.00	7.90	7.90	5.10	5.00	38	18.50	22.40	22.40	19.60	19.50
10	4.50	8.40	8.40	5.60	5.50	39	19.00	22.90	22.90	20.10	20.00
11	5.00	8.90	8.90	6.10	6.00	40	19.50	23.40	23.40	20.60	20.50
12	5.50	9.40	9.40	6.60	6.50	41	20.00	23.90	23.90	21.10	21.00
13	6.00	9.90	9.90	7.10	7.00	42	20.50	24.40	24.40	21.60	21.50
14	6.50	10.40	10.40	7.60	7.50	43	21.00	24.90	24.90	22.10	22.00
15	7.00	10.90	10.90	8.10	8.00	44	21.50	25.40	25.40	22.60	22.50
16	7.50	11.40	11.40	8.60	8.50	45	22.00	25.90	25.90	23.10	23.00
17	8.00	11.90	11.90	9.10	9.00	46	22.50	26.40	26.40	23.60	23.50
18	8.50	12.40	12.40	9.60	9.50	47	23.00	26.90	26.90	24.10	24.00
19	9.00	12.90	12.90	10.10	10.00	48	23.50	27.40	27.40	24.60	24.50
20	9.50	13.40	13.40	10.60	10.50	49	24.00	27.90	27.90	25.10	25.00
21	10.00	13.90	13.90	11.10	11.00	50	24.50	28.40	28.40	25.60	25.50
22	10.50	14.40	14.40	11.60	11.50	51	25.00	28.90	28.90	26.10	26.00
23	11.00	14.90	14.90	12.10	12.00	52	25.50	29.40	29.40	26.60	26.50
24	11.50	15.40	15.40	12.60	12.50	53	26.00	29.90	29.90	27.10	27.00
25	12.00	15.90	15.90	13.10	13.00	54	26.50	30.40	30.40	27.60	27.50
26	12.50	16.40	16.40	13.60	13.50	55	27.00	30.90	30.90	28.10	28.00
27	13.00	16.90	16.90	14.10	14.00	56	27.50	31.40	31.40	28.60	28.50
28	13.50	17.40	17.40	14.60	14.50	57	28.00	31.90	31.90	29.10	29.00
29	14.00	17.90	17.90	15.10	15.00	58	28.50	32.40	32.40	29.60	29.50
30	14.50	18.40	18.40	15.60	15.50	59	29.00	32.90	32.90	30.10	30.00
31	15.00	18.90	18.90	16.10	16.00	60	29.50	33.40	33.40	30.60	30.50
32	15.50	19.40	19.40	16.60	16.50	61	30.00	33.90	33.90	31.10	31.00

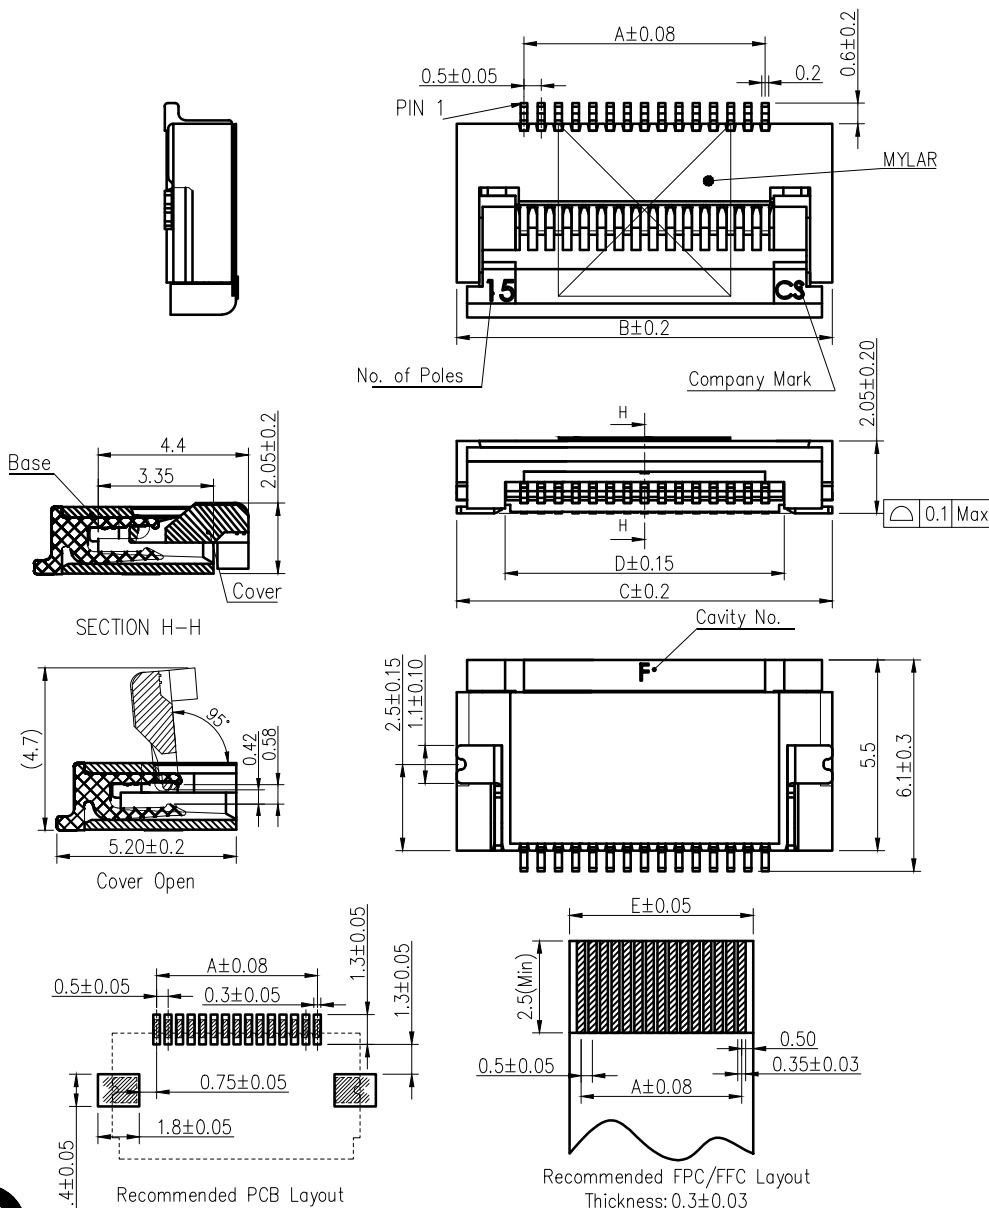

符合环境管理物质

Singatron Enterprise Co., Ltd.				
TITLE	0.50mm ZIF FPC Connectors			
DWN	sunquan	PART NO. 2FF1191PSDR-XXXXXX-XX-X		
CHKD	2015.06.30	SCALE 1:1	UNIT: mm	①
APVD		SIZE: A3	SHEET: 1 OF 1	REV: v
CUSTOMER COPY				

30~	±0.35	.X'	±2
20~30	±0.25	.X'	±1'
10~20	±0.15	.XX'	±0.5'
0~10	±0.10	.XXX'	±0.2'