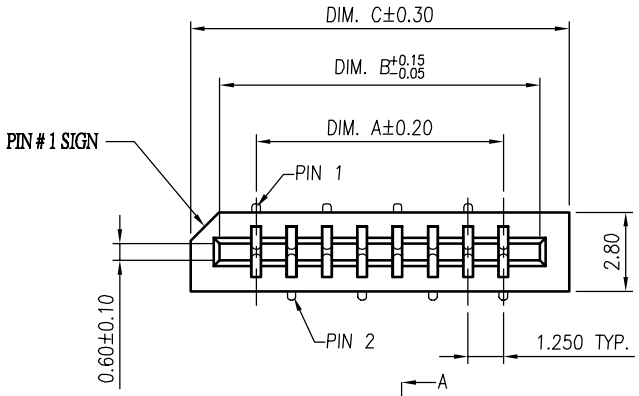

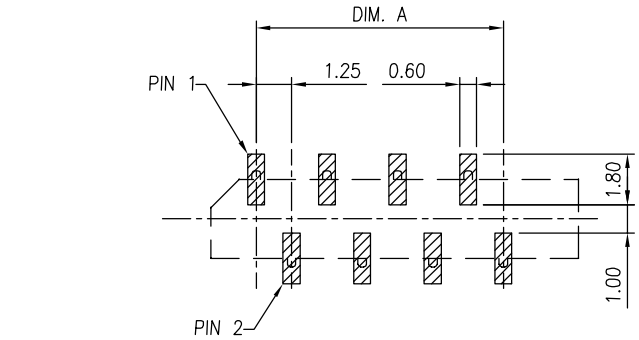

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

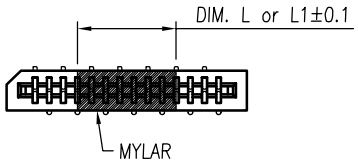

Standard Type(L):
3P~ 5P : 4.0(L) x 2.8(W)
6P~13P : 8.0(L) x 2.8(W)
14P~30P : 12.0(L) x 2.8(W)
Special Type(L1):
11P~30P : 16.0(L1) x 2.8(W)

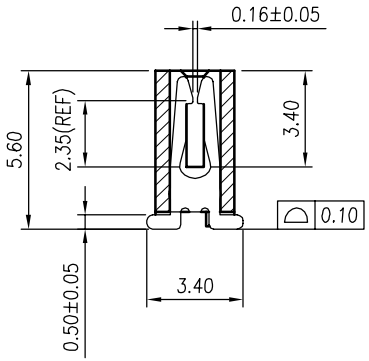

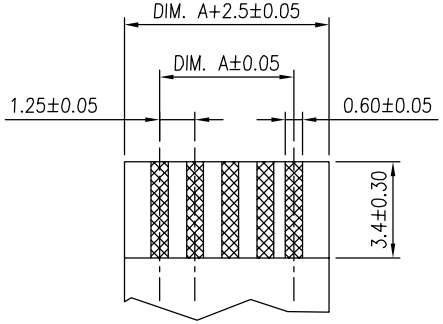

FPC/FFC T=0.30±0.05

NOTE:

1.MATERIAL:
HOUSING: PA6T or PA9T, UL94V-0, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE.
2.FINISH:
CONTACT AREA: TIN PLATING 100 u" THICKNESS MIN.
SOLDERING AREA: TIN PLATING 100 u" THICKNESS MIN.;
UNDER PLATING: NICKEL PLATING 50 u" THICKNESS MIN. OVERALL.
3.PRODUCT SPECIFICATION: PS-FPC-10
4.PACKAGING SPECIFICATION: REEL : GFP33004002
TUBE : GFP33004003

PART NO.

2GFP-3322 X 1- 3 X X 0 X G - XX

Series No.
Material:
2: PA6T
3: PA9T
No. Of Circuits
3 ~ 30 Pin
Packing Option
2. Tube Packing Without Mylar
4. Reel Packing With Mylar
5. Tube Packing With Mylar
6. Reel Packing Without Mylar
Space: Standard Type
L1 : Special Type

POS.	DIMENSION			POS.	DIMENSION		
	A	B	C		A	B	C
3	2.50	5.10	7.15	17	20.00	22.60	24.65
4	3.75	6.35	8.40	18	21.25	23.85	25.90
5	5.00	7.60	9.65	19	22.50	25.10	27.15
6	6.25	8.85	10.90	20	23.75	26.35	28.40
7	7.50	10.10	12.15	21	25.00	27.60	29.65
8	8.75	11.35	13.40	22	26.25	28.85	30.90
9	10.00	12.60	14.65	23	27.50	30.10	32.15
10	11.25	13.85	15.90	24	28.75	31.35	33.40
11	12.50	15.10	17.15	25	30.00	32.60	34.65
12	13.75	16.35	18.40	26	31.25	33.85	35.90
13	15.00	17.60	19.65	27	32.50	35.10	37.15
14	16.25	18.85	20.90	28	33.75	36.35	38.40
15	17.50	20.10	22.15	29	35.00	37.60	39.65
16	18.75	21.35	23.40	30	36.25	38.85	40.90

FPC/FFC 1.25mm PITCH CONNECTOR,
NON ZIF DUAL CONTACT SMT TYPE

REV	ECN NO.	NAME	DATE	TOLERANCE LINEAR	TOLERANCE ANGLES
K	13049	Willson	Sep,11,2013		
J	12054	Willson	Oct,08,2012	X.±0.40	X°.±
I	11048	Willson	Jan,17,2011	.X±0.30	.X°±
H	10045	Willson	Jul,07,2010	.XX±0.20	.XX°±
				.XXX±0.10	.XXX°±

Singatron Enterprise Co., Ltd.

TITLE	FPC/FFC 1.25mm PITCH CONNECTOR, NON ZIF DUAL CONTACT SMT TYPE		
DWN	Jason	PART NO. 2GFP-3322X1-3XX0XG	
CHKD	Schumi	SCALE 1:1	UNIT: mm
APVD	Jason	SIZE: A3	SHEET:1 OF 1 REV: K

CUSTOMER COPY

文件編號 RD-06-043-A