








REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	EVEN	2023.04.27



- SPECIFICATIONS: (HDMI A TYPE)
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 0.5 AMP.
 - VOLTAGE RATING: 40V.
 - INITIAL CONTACT RESISTANCE EXCLUDING CONDUCTOR RESISTANCE: 10mΩ MAX. (TARGET DESIGN VALUE). AFTER TEST: Δ30mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN. @ 500V DC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 4.5Kgf MAX.
 - WITHDRAWAL FORCE: 1.0~4.0Kgf.
 - LIFE TEST: 10,000 CYCLES.
 - OTHER GENERAL SPEC. TO REFER "2HE1783-500111F SPEC".
 - TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: 
 - PACKAGE: SEE "2HE1783-500111F" PACKAGE.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.

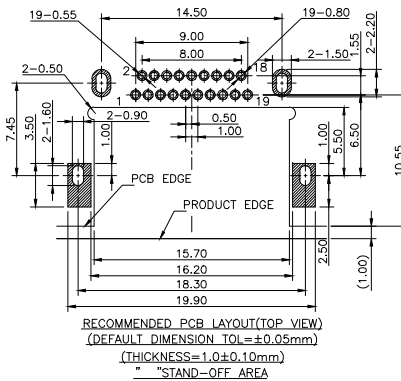



PART NO.
2HE1783-500111F

SUFFIX: HALOGEN FREE

PACKAGE
1: TAPE AND REEL
HOUSING COLOR
1: BLACK

CONTACT PLATING
1: GOLD FLASH ON CONTACT AREA,
60u~150u" MATTE TIN ON SOLDER AREA
50u" NICKEL UNDERPLATE OVER ALL.



HDMI TYPE A PIN ASSIGNMENT

PIN	Signal Assignment
1	TMDS Data2+
2	TMDS Data2 Shield
3	TMDS Data2-
4	TMDS Data1+
5	TMDS Data1 Shield
6	TMDS Data1-
7	TMDS Data0+
8	TMDS Data0 Shield
9	TMDS Data0-
10	TMDS Clock+
11	TMDS Clock Shield
12	TMDS Clock-
13	CEC
14	Utility
15	SCL
16	SDA
17	DDC/CEC Ground
18	+5V Power
19	Hot Plug Detect

	C	CONTACT	19	C2680	SEE PART NO.
	B	SHELL	1	SUS304	NICKEL 50u" MIN.
	A	HOUSING	1	LCP UL 94V-0	BLACK
	NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
	UNLESS OTHERWISE SPECIFIED TOLERANCES				
	信音科技(香港)有限公司				
	TITLE HDMI A TYPE FEMALE, REVERSE, SINKING, C.H=-1.1mm(HDMI 2.1)				
	DWN	EVEN 2023.04.27	PART NO. 2HE1783-500111F		A
	CHKD		SCALE 3.7:1	UNIT: mm	
	APVD	ANGELA2023.04.27	SIZE: A3	SHEET: 1 OF 1	REV: A
	CUSTOMER COPY				