
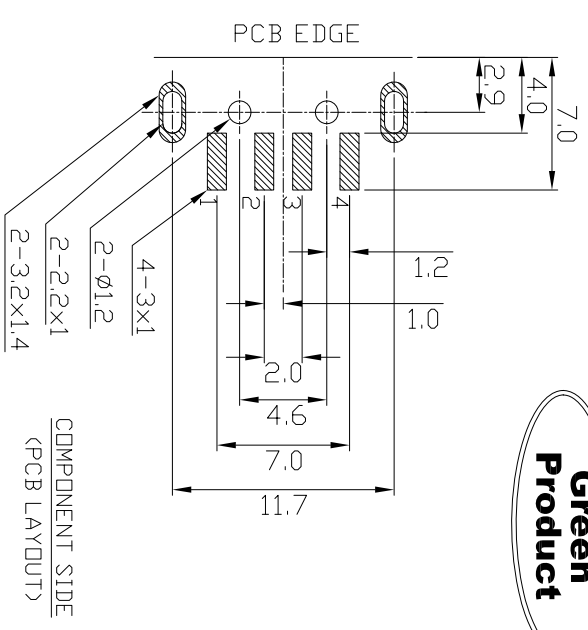
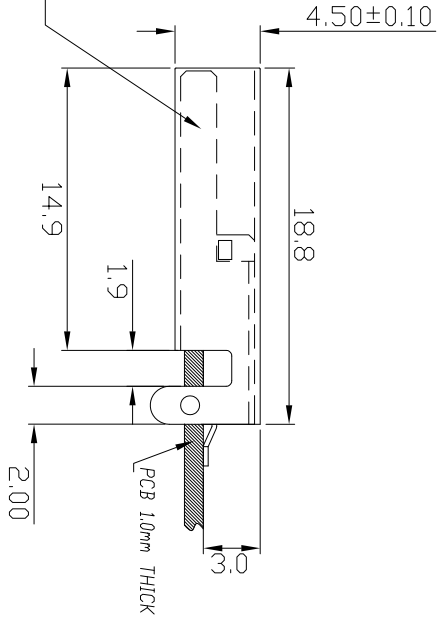


REV	ZONE	REVISION	DATE

**Specification:**  
 Contact Resistance: 30m Ohm Max.  
 Insulation Resistance: 1000M Ohm Min. At 500VDC.  
 Rated Voltage And Current: 1.5A At 250VAC Minimum.  
 Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1)  
 Durability (Life Test): 1500 Cycles  
 Insertion Force: 35 Newton Maximum.  
 Extraction Force: 10 Newton Minimum.

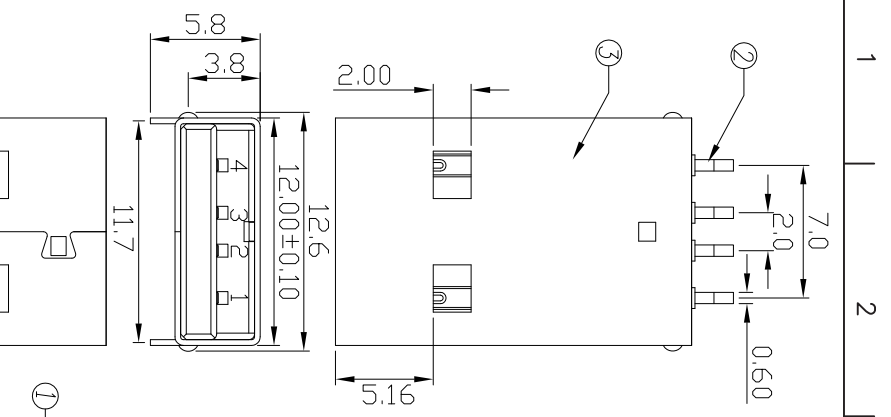

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	BLACK	1	
2	TERMINAL	BRASS E-H T:0.25	GOLD/TIN PLATED	4	Gold:1~3u", Ni:40~60u", TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni:80~120u"

**Singatron Enterprise Co., Ltd.**

TITLE	USB A TYPE PLUG PCB FLAT 4 PIN SMT		
DWN	TINA	PART NO.	2KS-001MSANB0L
CHKD	24-04-17	SCALE	1:1
APVD		SIZE	A3
		SHEET	1 OF 1
		REV	A0

**TOLERANCE**  
 X, ±0.38  
 XX, ±0.25  
 XXX, ±0.13  
 XXXX, ±0.05

**CUSTOMER COPY**