


Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage: 500V AC (rms) for 1 Minute(Rev. 2.0)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

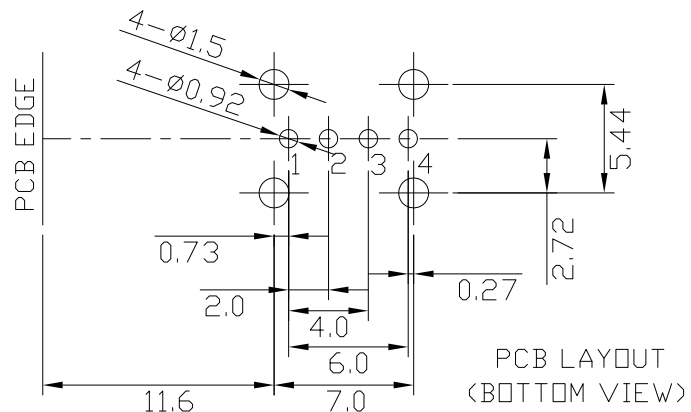

Green Product

Halogen Free

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP G.F.	BLACK	1	E130i
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:30u*; NI:40~60u* ; TIN:120u* (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	
4	REAR SHELL	SPCC T:0.3	NICKEL PLATED	1	
5	BOTTOM COVER	LCP G.F.	BLACK	1	E130i

Singatron Enterprise Co., Ltd.

TOLERANCE

X. ±0.38
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05

TITLE	USB A TYPE UPRIGHT SOCKET			
DWN	TINA	PART NO.	2KS-001VANBLCP2LH	
CHKD	17-11-17	SCALE	1:1	UNIT: mm
APVD		SIZE	A3	SHEET: 1 OF 1 REV: A0

CUSTOMER COPY