



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S110513-1A	Shown	2011.12.12	
B	ECN NO.:S140947	YF	2014.09.18	

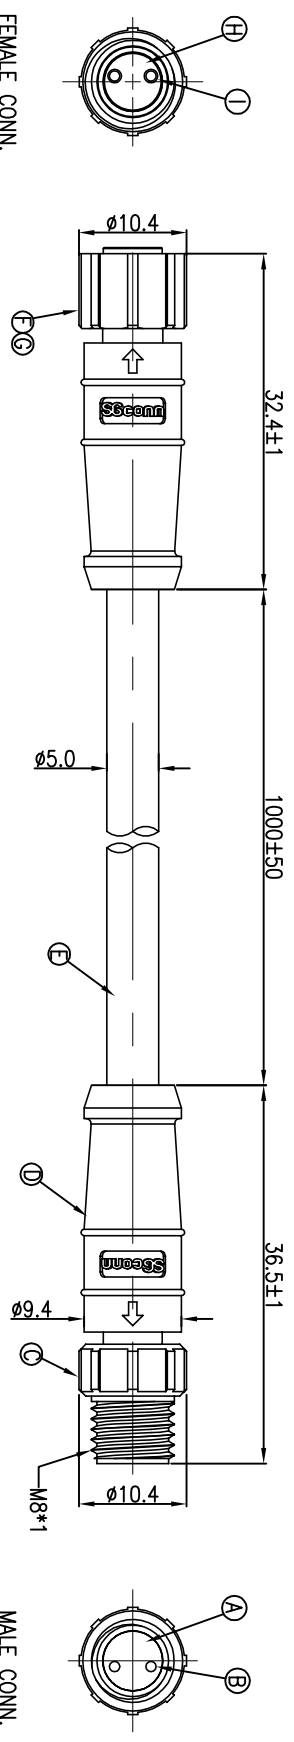

FEMALE CONN.
WATERPROOF RATE: IP67

MALE CONN.
WATERPROOF RATE: IP67

3	RED	3
1	BLACK	1
CONN1. WIRE COLOR		CONN2.
PIN OUT		
MALE CONN.		FEMALE CONN.

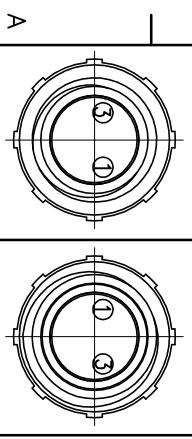

PIN ASSIGNMENTS
FRONT VIEW

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -20°C TO +80°C
RATING: 60V AC/DC 5A
3. SPECIFICATIONS: SEE "M8 SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
1	FEMALE PIN	2	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
H	BODY	1	TPU	BLACK
G	O-RING	1	VITON	RED
F	FEMALE SCREW NUT	1	NYLON+33%GF	BLACK
E	CABLE	1	UL2464 20#*2C+AL UV OD= $\phi 5.0$	BLACK(PVC JACKET)
D	OVER MOLD	2	TPU	BLACK
C	MALE SCREW NUT	1	NYLON+33%GF	BLACK
B	MALE PIN	2	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X.XX : ± 0.2 X.XX : ± 0.3 X.XX : ± 0.5 X.XX : $\pm 1^\circ$

APVD: Harlen SIZE: A3 SHEET: 1 OF 1 REV: B

CUSTOMER COPY

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司