




REV.	E/CN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T131118-1A		Shown	2014.02.14
B	E/CN NO.:S141256		Vicky	2014.01.09
C	E/CN NO.:S150343-C		Susie	2015.03.20
D	E/CN NO.:S150864-R		Vicky	2015.08.25
E	E/CN NO.:S151130-R		Vicky	2015.11.18
F	E/CN NO.:S160349-R		Yang	2016.03.29

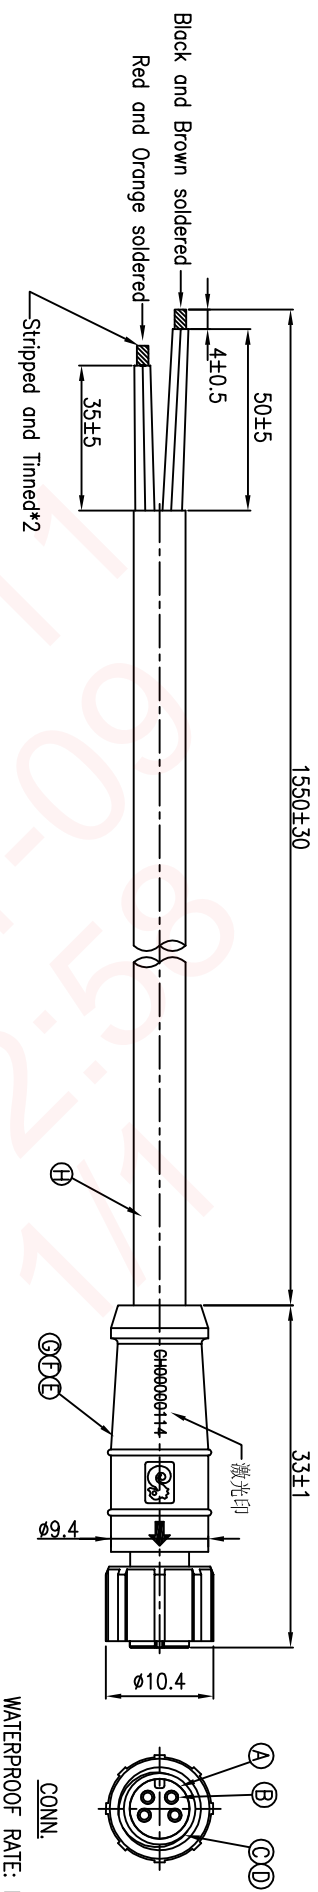

WATERPROOF RATE: IP67

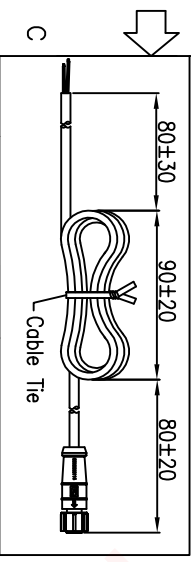

4	ORANGE
3	RED
2	BROWN
1	BLACK
CONN.	WIRE COLOR
B	PIN OUT
CONN.	



PIN ASSIGNMENTS  
FRONT VIEW

- NOTES:
1. WATERPROOF RATE: IP67  
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
  2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE: -20°C TO +80°C  
RATING: 60V AC/DC 2A
  3. SPECIFICATIONS:SEE "M8 SERIES SPECIFICATIONS."
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	TPU	BLACK
B	FEMALE PIN	4	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
C	SCREW NUT	1	PA66+33%GF	BLACK
D	O-RING	1	VITON	RED
E	OVER MOLD	1	TPU	BLACK
F	HEAT SHRINK TUBE	4	φ1.5*7mm 125' 300V	BLACK
G	UV GLUE	1	8860	NATURAL
H	CABLE	1	UL2464 22AWG*4C+AL UV RESISTANT OD5.0	BLACK(PVC70P JACKET)

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2  
X.X :±0.3 X.X :±1'  
X.XX :±0.2

Singatron Enterprise Co., Ltd.  
信亨企業股份有限公司

TITLE: M8 SERIES FEMALE CONN. (4PIN)

DWN: Yang PART NO.:ME3010-W04209H

CHKD: JF SCALE 2:1 UNIT: mm

APVD: Harlen SIZE: A3 SHEET: 1 OF 1 REV: F

CUSTOMER COPY