




REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	SI150416-15B	Wicky	2015.03.30

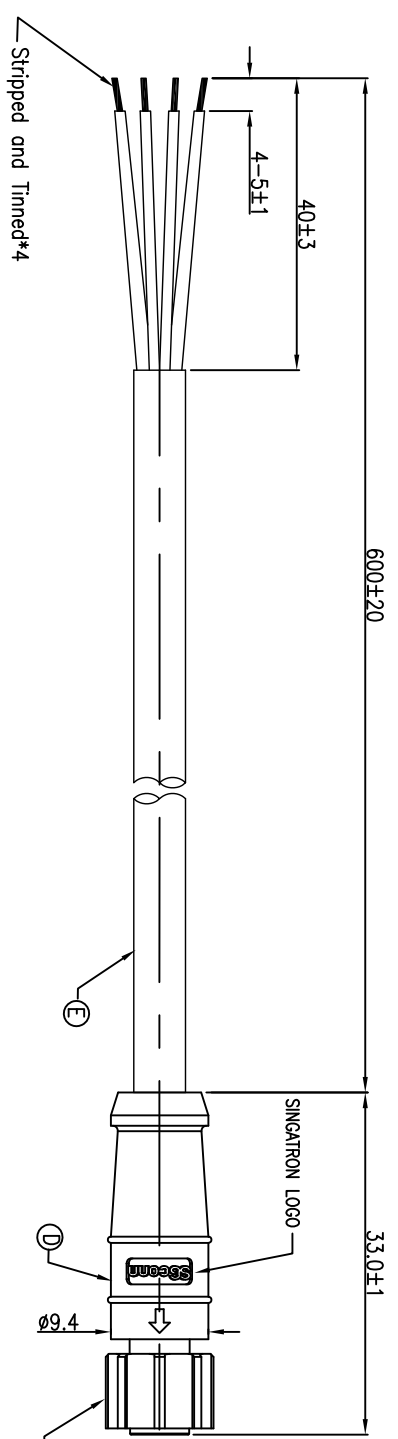

WATERPROOF RATE: IP67

WHITE	4
BLACK	3
BLUE	2
BROWN	1
WIRE COLOR	CONN.



PIN ASSIGNMENTS  
FRONT VIEW

NOTES:

1. WATERPROOF RATE: IP67  
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE: -20°C TO +80°C  
RATING: 60V AC/DC 5A
3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
4. SPECIFICATIONS: SEE "M8 SERIES SPECIFICATIONS".
5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: Gr. Pass

F	O-RING	1	VITON 70°	RED
E	CABLE	1	UL2464 20AWG*4C+HAL OD:6.0(UV)	BLACK(PVC JACKET)
D	OVER MOLD	1	TPU BASF S98A	BLACK
C	NUT	1	NYLON66+33%GF	BLACK
B	FEMALE PIN	4	Phosphor Bronze CS441	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU(1164D) BASF	BLACK
NO	DESCRIPTION		MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		SINGATRON ENTERPRISE CO., LTD. 信登企業股份有限公司	
DECIMALS:	ANGLES:		
X :±0.5	X :±2°		
X.X :±0.3	X.X :±1°		
X.XX :±0.2			
TITLE	M8 SERIES FEMALE CONN. (4PIN)		
DWN	Wicky	PART NO.	2ME3010-W04318H
CHKD	Harlen	SCALE	2:1 UNIT: mm
APVD	Steve	SIZE	A3 SHEET: 1 OF 1 REV: A

**CUSTOMER COPY**