



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T160728-1A	JF		2017.10.27

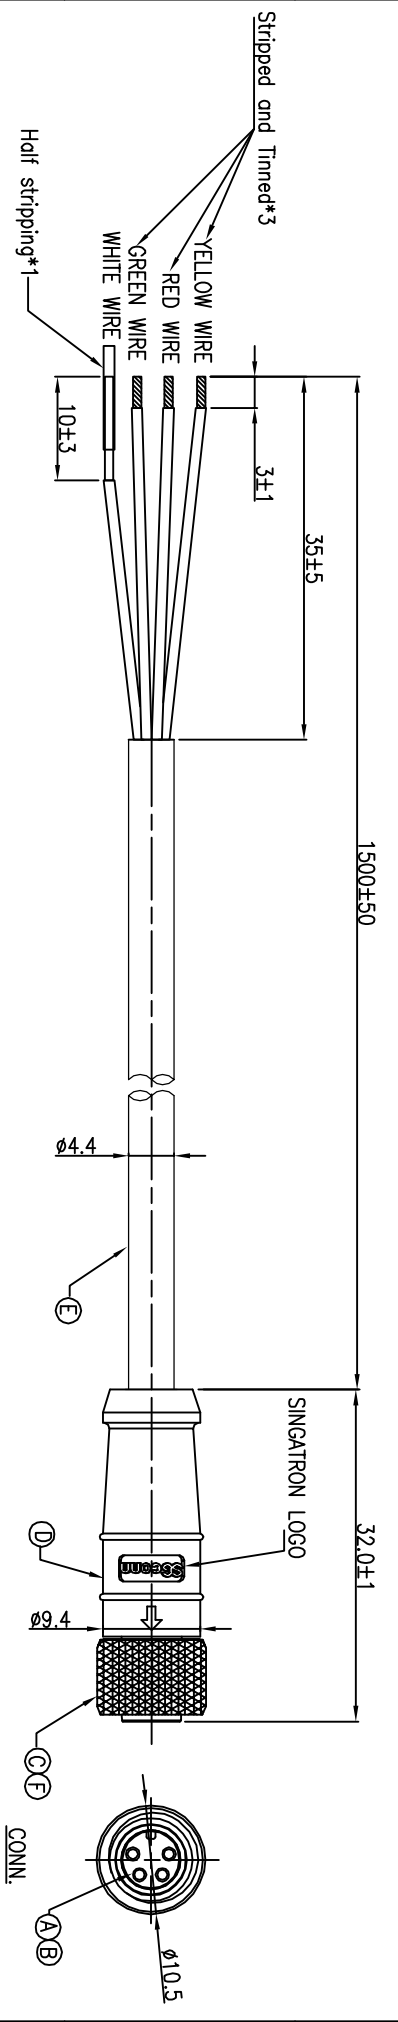

YELLOW	4
RED	3
GREEN	2
WHITE	1
WIRE COLOR	CONN.



PIN ASSIGNMENTS
FRONT VIEW

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -20°C TO +80°C
RATING: 60V AC/DC 5A
3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
SPECIFICATIONS:SEE "M8 SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GREEN PASS**

F	O-RING	1	VITON 70°	RED
E	CABLE	1	UL2464 24#*4C+A Ø4.4(UV)	BLACK(PVC JACKET)
D	OVER MOLD	1	TPU	BLACK
C	NUT	1	BRASS	NICKEL PLATING 100u"
B	FEMALE PIN	4	Phosphor Bronze	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

TITLE: M8 SERIES FEMALE CONN. (4PIN)

DWN: JF PART NO. 2MB3010-W04326H
CHKD: Yang SCALE 2:1 UNIT: mm
APVD: Steve SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY