



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR	NO:T161117-1A	Yang	2017.04.05

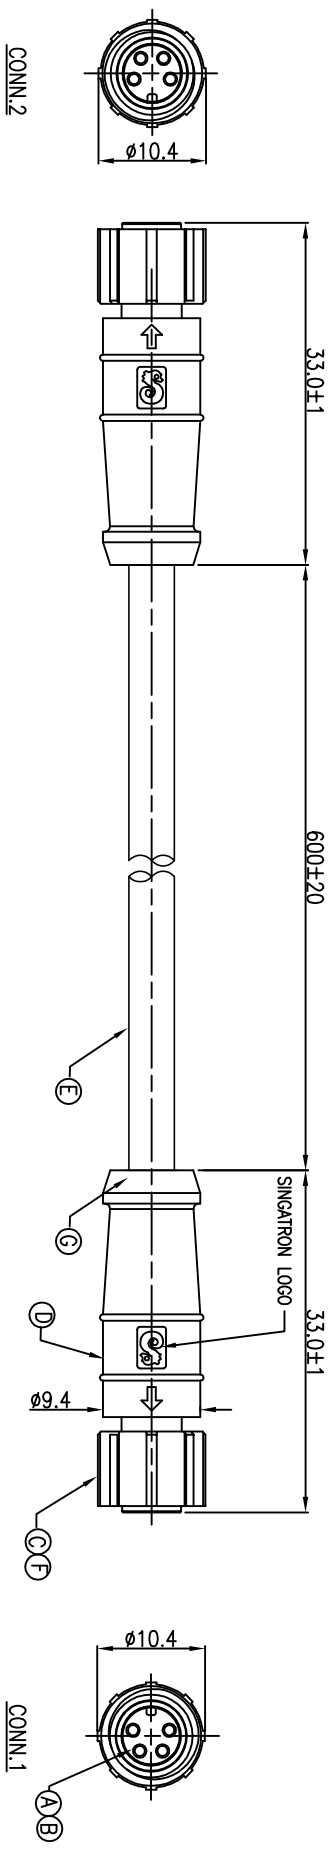

4	YELLOW	4
3	RED	3
2	GREEN	2
1	WHITE	1
CONN.1	WIRE COLOR	CONN.2



PIN ASSIGNMENTS
FRONT VIEW

NOTES:

1. WATERPROOF RATE: IP67
 2. ELECTRICAL CHARACTERISTICS
 3. SPECIFICATIONS: SEE "M8 SERIES SPECIFICATIONS"
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 RATING: 60V AC/DC 5A
 TEMPERATURE RANGE: -20°C TO +80°C

G	UV GLUE	2	N/A	WHITE
F	O-RING	2	VITON	RED
E	CABLE	1	UL2464 24#4C+A OD:4.4(UV)	BLACK(PVC JACKET)
D	OVER MOLD	1	TPU	BLACK
C	NUT	2	PA66	BLACK
B	FEMALE PIN	8	Phosphor Bronze	GOLD PLATING OVER NICKEL PLATING
A	BODY	2	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE: M8 SERIES FEMALE CONN. (4PIN)				
DMW	Yang	PART NO.	2MB3010-W04327H	
CHKD	Harlen	SCALE	2:1	UNIT: mm
APVD	Steve	SIZE	A3	SHEET: 1 OF 1
REV: A				
CUSTOMER COPY				

1 2 3 4 5 6 7 8