



REV.	E/CN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S110603-4B		Shown	2011.12.27
B	E/CN NO.:S121233		Shown	2012.12.17
C	E/CN NO.:S140947		YF	2014.09.19

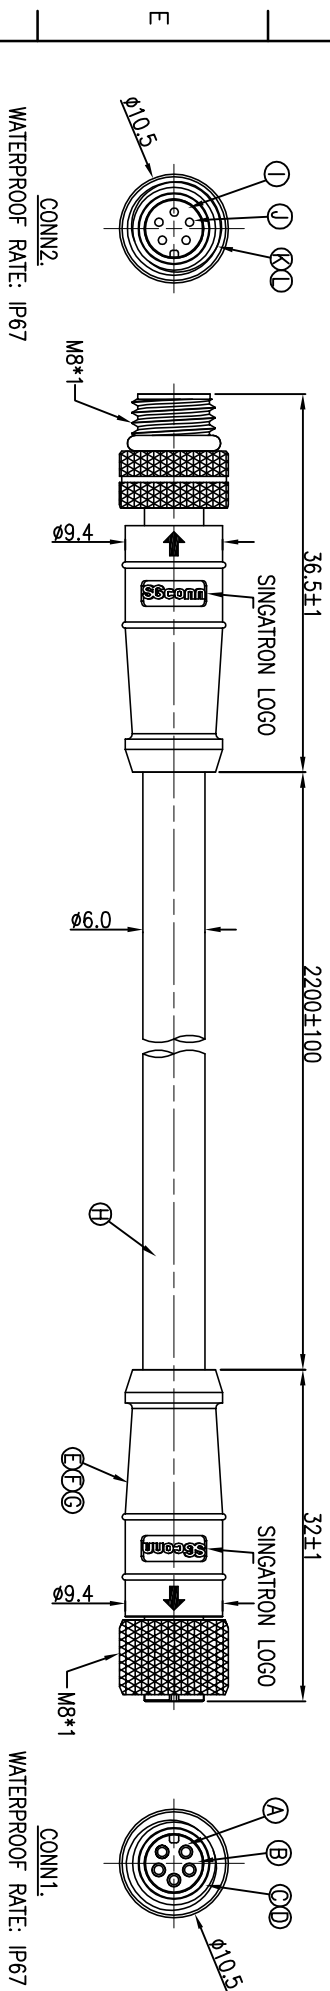

5	PINK	5
4	WHITE	4
3	BLUE	3
2	GREEN	2
1	YELLOW	1
CONN1.		CONN2.
WIRE COLOR		
PIN OUT		

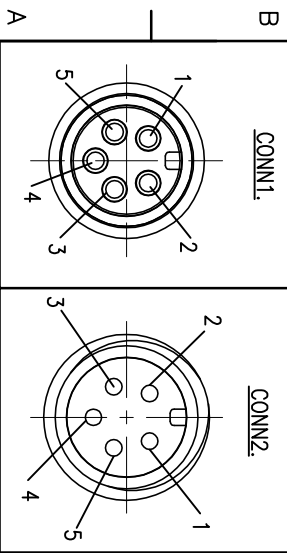

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -20°C TO +80°C
RATING: 60V AC/DC 2A
 3. SPECIFICATIONS:SEE "M8 SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

PIN ASSIGNMENTS
FRONT VIEW

L	O-RING	1	VITON	BLACK
K	SCREW NUT	1	Brass	NICKEL PLATING 60u"
J	MALE PIN	5	Brass	1~3u" GOLD PLATING OVER NICKEL PLATING
I	BODY	1	TPU	BLACK
H	CABLE	1	UL2464 24#*5C+AL UV OD=Ø6.0	BLACK(PVC90P JACKET)
G	UV GLUE	1	N/A	NATURAL
F	SHRINK TUBE	10	Ø1.5*7mm	BLACK
E	OVER MOLD	2	TPU	BLACK
D	O-RING	1	VITON	RED
C	SCREW NUT	1	Brass	NICKEL PLATING 60u"
B	FEMALE PIN	5	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信譽企業股份有限公司				
TITLE		M8 SERIES F CONN + M CONN(5PIN)		
D/W	YF	PART NO.2ME3010-W05200H		
CHKD	JF	SCALE 2:1	UNIT: mm	
APVD	Harlen	SIZE: A3	SHEET:1 OF 1	REV: C
CUSTOMER COPY				