


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T160106-1A&1C&1D	JF	2017.10.26

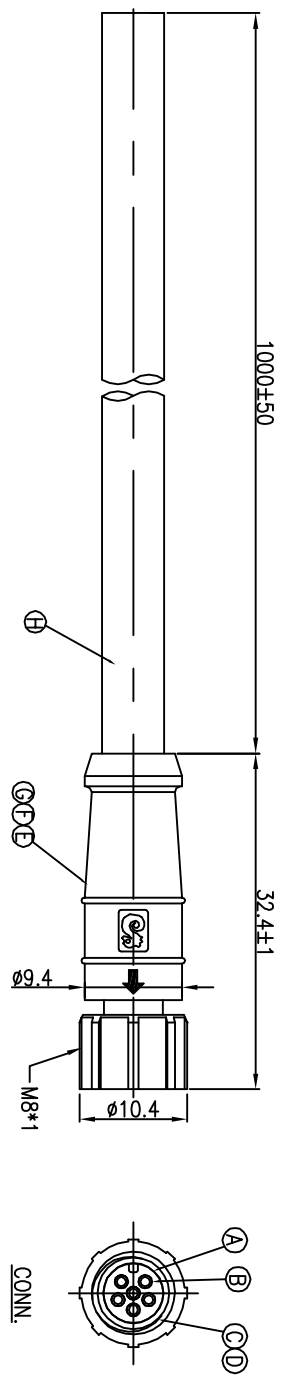

CONN.
WATERPROOF RATE: IP67

- NOTES:
1. WATERPROOF RATE: IP67
 2. ELECTRICAL CHARACTERISTICS
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
TEMPERATURE RANGE: -20°C TO +80°C
RATING: 60V AC/DC 2A
 3. SPECIFICATIONS: SEE "M8 SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 6. ORDER INFORMATION: ZME3010-WOX200H

A	2ME3010-W06200H		Pin Assignments Front View	Cable Spec.
B	2ME3010-W05200H		Pin Assignments Front View	Cable Spec.
C	2ME3010-W04200H		Pin Assignments Front View	Cable Spec.

4- 4 PIN
5- 5 PIN
6- 6 PIN

F	CABLE	1	SEE NOTE 7	BLACK
G	UV GLUE	1	N/A	N/A
F	HEAT SHRINK TUBE	*	Ø1.5*7mm 125' 300V	BLACK
E	OVER MOLD	1	TPU	BLACK
D	O-RING	1	VITON	RED
C	SCREW NUT	1	PA66	BLACK
B	FEMALE PIN	*	Phosphor Bronze Alloy	1~3µ" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 				
TITLE M8 SERIES 180'(4~6)PIN FEMALE CONN.				
DECIMALS:	ANGLES:	TITLE M8 SERIES 180'(4~6)PIN FEMALE CONN.		
X :±0.5	X :±2'	DWN	JF	PART NO. 2ME3010-WOX200H
XX :±0.3	XX :±1'	CHKD	Yang	SCALE 2:1 UNIT: mm
XXX :±0.2		APVD	Steve	SIZE: A3 SHEET: 1 OF 1 REV: A
CUSTOMER COPY				